



## ASX14

**Energy-Efficient  
Split System Air Conditioner**  
Up to 15 SEER & 12.5 EER  
Cooling Capacity: 18,000 - 60,000 BTU/h

Nomenclature .....	2
Product Specifications .....	3
Expanded Cooling Data .....	5
Performance Data .....	29
AHRI Ratings .....	31
Wiring Diagram .....	79
Dimensions .....	80
Accessories .....	80

### Standard Features

- Energy-efficient scroll compressor
- High-density foam compressor sound blanket
- Copeland® ComfortAlert™ diagnostics
- Single-speed PSC condenser fan motor
- Factory-installed filter drier
- Copper tube / enhanced aluminum fin coil
- Sweat connection service valves with easy access to gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

### Cabinet Features

- Heavy-gauge, galvanized-steel cabinet with sound control top
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Wire fan discharge grille
- Steel louver coil guard
- Compact footprint
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories
- When properly anchored, meets the 2017 Florida Building Code unit integrity requirements for hurricane-type winds (Anchor bracket kits available.)

## X-PROTECT

\* Complete warranty details available on [www.nexgenairandheat.com](http://www.nexgenairandheat.com). To receive the Lifetime Unit Replacement Warranty (good for as long as you own your home) and 10-Year Parts Lifetime Warranty, in order to qualify for lifetime replacement warranty you need to be part of the X Protection Family. Membership must be current and up-to-date.



	A	S	X	14	036	1	AA	
	1	2	3	4,5	6,7,8	9	10,11	
<b>Brand</b>							<b>Engineering *</b>	
A Amana® Brand							Major/ Minor Revisions	
A Nexgen							* Not used for order or inventory control	
<b>Product Category</b>							<b>Electrical</b>	
S Split System							1- 208/230 V, 1 Phase, 60 Hz	
N Nominal Split System								
<b>Unit Type</b>							<b>Nominal Capacity</b>	
X Condenser R-410A							018 1½ Tons	030 2½ Tons 042 3½ Tons
Z Heat Pump R-410A							019 1½ Tons	031 2½ Tons 043 3½ Tons
							024 2 Tons	036 3 Tons 048 4 Tons
							025 2 Tons	037 3 Tons 060 5 Tons
<b>Efficiency</b>								
13 13 SEER	16	16 SEER						
14 14 SEER	18	18 SEER						

	ASX14 0181L*	ASX14 0191K*	ASX14 0241L*	ASX14 0251L*	ASX14 0301K*	ASX14 0311K*
<b>CAPACITIES</b>						
Nominal Cooling (BTU/h)	18,000	18,000	24,000	24,000	30,000	30,000
SEER / EER	14 / 12	14 / 12.2	14 / 12.2	14 / 12.2	14 / 12	14 / 12.2
Decibels	70	70	71	71	71	71
<b>COMPRESSOR</b>						
RLA	9.0	9.0	13.5	13.5	12.8	12.8
LRA	47.5	47.5	58.3	58.3	64	67.8
<b>CONDENSER FAN MOTOR</b>						
Horsepower	1/8	1/8	1/8	1/8	1/6	1/6
FLA	0.7	0.7	0.7	0.7	0.95	0.95
<b>REFRIGERATION SYSTEM</b>						
Refrigerant Line Size						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) <sup>3 4</sup>	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	68	68	75	75	80	90
Shipped with Orifice Size	0.053	0.053	0.057	0.057	0.065	0.063
<b>ELECTRICAL DATA</b>						
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity <sup>1</sup>	12	12	17.6	17.6	17.0	17.0
Max. Overcurrent Protection <sup>2</sup>	20 amps	20 amps	30 amps	30 amps	25 amps	25 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)	131	131	136	136	162	162
Ship Weight (lbs)	146	146	153	153	180	180

<sup>1</sup> Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

<sup>4</sup> Installer will need to supply 3/4" to 3/8" adapters for suction line connections.

<sup>5</sup> Installer will need to supply 3/8" to 1/4" adapters for suction line connections.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

	ASX14 0361K*	ASX14 0371K*	ASX14 0421K*	ASX14 0431K*	ASX14 0481K*	ASX14 0601K*
<b>CAPACITIES</b>						
Nominal Cooling (BTU/h)	36,000	36,000	42,000	42,000	48,000	60,000
SEER / EER	14 / 12	14 / 12.2	14 / 12	14 / 12.2	14 / 11.7	14 / 11.7
Decibels	72	72	72	73	73	74
<b>COMPRESSOR</b>						
RLA	14.1	14.1	16.7	16.7	19.9	25.0
LRA	77	72.2	79	79	109	134
<b>CONDENSER FAN MOTOR</b>						
Horsepower	1/6	1/6	1/6	1/6	1/4	1/4
FLA	0.95	0.95	0.95	0.95	1.3	1.3
<b>REFRIGERATION SYSTEM</b>						
Refrigerant Line Size						
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	7/8"	7/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size						
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) <sup>3 4</sup>	3/4"	3/4"	7/8"	7/8"	7/8"	7/8"
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	81	81	93	93	101	120
Shipped with Orifice Size	0.068	0.071	0.074	0.074	0.078	0.088
<b>ELECTRICAL DATA</b>						
Voltage-Phase (60 Hz)	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1	208/230-1
Minimum Circuit Ampacity <sup>1</sup>	18.6	18.6	21.8	21.8	26.2	32.6
Max. Overcurrent Protection <sup>2</sup>	30 amps	30 amps	35 amps	35 amps	45 amps	50 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
Equipment Weight (lbs)	162	162	189	189	220	260
Ship Weight (lbs)	180	180	207	207	242	280

<sup>1</sup> Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240.

For other line-set lengths or sizes, refer to the installation & Operating instructions and/or the long line-set guidelines.

<sup>2</sup> Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

<sup>3</sup> Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

<sup>4</sup> Installer will need to supply 3/8" to 7/8" adapters for suction line connections.

<sup>5</sup> Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.

IDB		OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
		AIRFLOW			59	63	67	71	59			63	67	71	59			63	67	71	59			63	67	71	59			63	67
ENTERING INDOOR WET BULB TEMPERATURE																															
<b>70</b>	MBh	18.1	18.4	18.9	-	18.0	18.2	18.8	-	17.5	17.8	18.3	-	16.7	17.0	17.5	-	15.7	16.0	16.5	-	14.8	15.1	15.6	-						
	S/T	0.65	0.57	0.44	-	0.65	0.58	0.45	-	0.68	0.60	0.47	-	1.00	0.62	0.49	-	1.00	0.64	0.51	-	1.00	0.69	0.56	-						
	ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	18	14	-	21	19	15	-						
	KW	1.05	1.05	1.05	-	1.17	1.17	1.16	-	1.30	1.30	1.29	-	1.44	1.44	1.43	-	1.59	1.59	1.59	-	1.78	1.78	1.77	-						
	Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.6	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-						
<b>75</b>	MBh	18.3	18.6	19.1	-	18.2	18.4	19.0	-	17.7	18.0	18.5	-	16.9	17.2	17.7	-	15.9	16.2	16.7	-	15.0	15.3	15.8	-						
	S/T	0.67	0.60	0.47	-	0.68	0.61	0.47	-	0.70	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.72	0.59	-						
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-						
	KW	1.05	1.05	1.05	-	1.17	1.17	1.17	-	1.30	1.30	1.30	-	1.44	1.44	1.44	-	1.60	1.60	1.59	-	1.78	1.78	1.78	-						
	Amps	3.9	3.9	3.9	-	4.4	4.4	4.4	-	5.0	5.0	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.2	7.2	7.2	-						
<b>70</b>	HI PR	241	242	244	-	279	280	281	-	318	319	321	-	360	361	363	-	406	407	409	-	455	456	457	-						
	LO PR	126	128	131	-	133	135	138	-	140	142	145	-	146	147	150	-	151	152	156	-	158	159	162	-						
	MBh	18.7	18.9	19.5	-	18.5	18.8	19.3	-	18.1	18.3	18.9	-	17.3	17.5	18.1	-	16.3	16.5	17.1	-	15.4	15.6	16.2	-						
	S/T	0.69	0.62	0.49	-	0.70	0.62	0.49	-	0.72	0.65	0.52	-	1.00	0.67	0.53	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-						
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-						
<b>75</b>	KW	1.06	1.06	1.06	-	1.18	1.17	1.17	-	1.30	1.30	1.30	-	1.45	1.44	1.44	-	1.60	1.60	1.60	-	1.79	1.79	1.78	-						
	Amps	3.9	3.9	3.9	-	4.5	4.5	4.5	-	5.1	5.1	5.0	-	5.7	5.7	5.7	-	6.4	6.4	6.4	-	7.3	7.3	7.2	-						
	HI PR	243	244	246	-	281	282	283	-	320	321	323	-	362	363	365	-	408	409	411	-	457	458	459	-						
	LO PR	128	130	133	-	136	137	141	-	142	144	147	-	148	149	153	-	153	155	158	-	160	162	165	-						
	MBh	18.2	18.4	18.9	19.8	18.0	18.2	18.8	19.6	17.5	17.8	18.3	19.1	16.7	17.0	17.5	18.3	15.7	16.0	16.5	17.3	14.8	15.1	15.6	16.4						
<b>525</b>	S/T	0.77	0.70	0.57	0.43	0.78	0.70	0.57	0.43	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55						
	ΔT	24	22	18	15	24	22	18	15	24	22	19	15	24	22	18	15	24	22	18	14	25	23	19	16						
	KW	1.05	1.05	1.05	1.06	1.17	1.16	1.16	1.17	1.30	1.29	1.29	1.30	1.44	1.43	1.43	1.44	1.59	1.59	1.59	1.60	1.78	1.78	1.77	1.78						
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.4	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2						
	HI PR	240	241	243	247	277	278	280	284	317	318	319	324	359	360	362	366	405	406	407	411	453	454	456	460						
<b>600</b>	LO PR	125	126	129	134	132	134	137	142	139	140	143	148	144	146	149	154	150	151	154	159	156	158	161	166						
	MBh	18.4	18.6	19.1	20.0	18.2	18.4	19.0	19.8	17.7	18.0	18.5	19.3	16.9	17.2	17.7	18.5	15.9	16.2	16.7	17.5	15.0	15.3	15.8	16.6						
	S/T	0.80	0.73	0.59	0.45	1.00	0.73	0.60	0.46	1.00	0.76	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.53	1.00	1.00	0.71	0.58						
	ΔT	23	21	18	14	23	21	18	14	24	22	18	14	23	21	18	14	23	21	17	14	24	22	19	15						
	KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.59	1.60	1.78	1.78	1.78	1.79						
<b>675</b>	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3						
	HI PR	241	242	244	248	279	280	282	286	318	319	321	325	360	361	363	367	406	407	409	413	455	456	457	462						
	LO PR	126	128	131	136	133	135	138	143	140	142	145	150	146	147	150	155	151	153	156	161	158	159	162	168						
	MBh	18.7	19.0	19.5	20.3	18.5	18.8	19.3	20.2	18.1	18.3	18.9	19.7	17.3	17.5	18.1	18.9	16.3	16.5	17.1	17.9	15.4	15.6	16.2	17.0						
	S/T	0.82	0.74	0.61	0.47	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	0.79	0.66	0.52	1.00	1.00	0.68	0.54	1.00	1.00	0.73	0.59						
<b>675</b>	ΔT	22	20	17	13	22	20	17	13	23	21	17	13	22	20	17	13	22	20	16	13	23	21	18	14						
	KW	1.06	1.06	1.06	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.79	1.78	1.78	1.79						
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.0	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3						
	HI PR	244	245	246	250	281	282	284	288	320	321	323	327	363	364	365	369	408	409	411	415	457	458	460	464						
	LO PR	128	130	133	138	136	137	141	146	142	144	147	152	148	149	153	158	153	155	158	163	160	162	165	170						

kW = Total system power  
Amps = outdoor unit amps (comp.+fan)

Shaded area reflects ACCA (TVA) conditions

IDB: Entering Indoor Dry Bulb Temperature  
High and low pressures are measured at the liquid and suction service valves.

IDB		OUTDOOR AMBIENT TEMPERATURE																								
		65				75				85				95				105				115				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
<b>525</b>	MBh	18.2	18.5	19.0	19.8	18.1	18.3	18.9	19.7	17.6	17.9	18.4	19.2	16.8	17.1	17.6	18.4	15.8	16.1	16.6	17.4	14.9	15.2	15.7	16.5	
	S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67	
	ΔT	28	26	23	19	27	26	23	19	29	27	23	19	28	26	23	19	28	26	22	19	29	27	24	20	
	KW	1.05	1.05	1.05	1.1	1.17	1.17	1.16	1.17	1.30	1.30	1.29	1.3	1.44	1.44	1.43	1.44	1.59	1.59	1.59	1.6	1.78	1.78	1.77	1.78	
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2	
	HI PR	240	241	243	247	278	279	281	285	317	318	320	324	359	360	362	366	405	406	408	412	454	455	456	461	
	LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167	
	<b>600</b>	MBh	18.4	18.7	19.2	20.0	18.3	18.5	19.1	19.9	17.8	18.1	18.6	19.4	17.0	17.3	17.8	18.6	16.0	16.3	16.8	17.6	15.1	15.4	15.9	16.7
		S/T	1.00	0.85	0.72	0.6	1.00	0.85	0.72	0.58	1.00	0.88	0.75	0.6	1.00	1.00	0.76	0.63	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.70
		ΔT	28	26	22	18	28	26	22	18	28	26	22	19	28	26	22	18	27	25	22	18	28	27	23	19
KW		1.05	1.05	1.05	1.1	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.44	1.44	1.44	1.45	1.60	1.60	1.59	1.6	1.78	1.78	1.78	1.79	
Amps		3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	
HI PR		242	243	244	249	279	280	282	286	319	320	321	325	361	362	364	368	406	408	409	413	455	456	458	462	
LO PR		127	128	131	136	134	136	139	144	141	142	145	150	146	148	151	156	152	153	156	161	158	160	163	168	
<b>675</b>		MBh	18.8	19.1	19.6	20.4	18.6	18.9	19.4	20.2	18.2	18.4	19.0	19.8	17.4	17.6	18.2	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1
		S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71
		ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18
	KW	1.06	1.06	1.06	1.1	1.18	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.45	1.44	1.44	1.45	1.60	1.60	1.60	1.6	1.79	1.78	1.78	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.1	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.2	7.3	
	HI PR	244	245	247	251	281	282	284	288	321	322	323	328	363	364	366	370	409	410	411	416	457	458	460	464	
	LO PR	129	130	134	139	136	138	141	146	143	144	148	153	149	150	153	158	154	155	159	164	161	162	165	171	

IDB		OUTDOOR AMBIENT TEMPERATURE																								
		65				75				85				95				105				115				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
<b>525</b>	MBh	18.5	18.8	19.3	20.2	18.4	18.6	19.2	20.0	17.9	18.2	18.7	19.5	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8	
	S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.79	0.65	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77	
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	27	24	
	KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.17	1.30	1.30	1.30	1.30	1.44	1.44	1.44	1.44	1.60	1.59	1.59	1.60	1.78	1.78	1.78	1.79	
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	
	HI PR	241	242	244	248	279	280	282	286	318	319	321	325	361	362	363	367	406	407	409	413	455	456	458	462	
	LO PR	127	128	132	137	134	136	139	144	141	143	146	151	147	148	151	156	152	153	157	162	159	160	163	169	
	<b>600</b>	MBh	18.7	19.0	19.5	20.4	18.6	18.8	19.4	20.2	18.1	18.4	18.9	19.7	17.3	17.6	18.1	18.9	16.3	16.6	17.1	17.9	15.4	15.7	16.2	17.0
		S/T	1.00	0.95	0.81	0.67	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.75	1.00	1.00	1.00	0.80
		ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	26	22	32	30	27	23
KW		1.06	1.06	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.78	1.78	1.78	1.79	
Amps		3.9	3.9	3.9	3.9	4.5	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3	
HI PR		243	244	246	250	280	281	283	287	320	321	322	327	362	363	365	369	408	409	410	414	456	457	459	463	
LO PR		128	130	133	138	136	137	141	146	142	144	147	152	148	149	153	158	153	155	158	163	160	162	165	170	
<b>675</b>		MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4
		S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.76	1.00	1.00	1.00	0.81
		ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.30	1.31	1.45	1.45	1.44	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79	
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	
	HI PR	245	246	248	252	283	284	285	289	322	323	325	329	364	365	367	371	410	411	412	417	458	459	461	465	
	LO PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	160	166	163	164	167	172	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)





IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>550</b>	MBh	18.2	18.5	19.0	19.8	18.1	18.3	18.9	19.7	17.6	17.9	18.4	19.2	16.8	17.1	17.6	18.4	15.8	16.1	16.6	17.4	14.9	15.2	15.7	16.5
	S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.69	0.56	1.00	0.85	0.72	0.6	1.00	1.00	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67
	ΔT	28	26	23	19	27	26	23	19	29	27	23	19	28	26	23	19	28	26	22	19	29	27	24	20
	KW	1.05	1.05	1.05	1.1	1.17	1.17	1.16	1.17	1.30	1.30	1.29	1.3	1.44	1.44	1.43	1.44	1.59	1.59	1.59	1.6	1.78	1.78	1.77	1.78
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.0	5.7	5.7	5.6	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.2
	HI PR	240	241	243	247	278	279	281	285	317	318	320	324	359	360	362	366	405	406	408	412	454	455	456	461
LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167	
<b>600</b>	MBh	18.4	18.7	19.2	20.0	18.3	18.5	19.1	19.9	17.8	18.1	18.6	19.4	17.0	17.3	17.8	18.6	16.0	16.3	16.8	17.6	15.1	15.4	15.9	16.7
	S/T	1.00	0.85	0.72	0.6	1.00	0.85	0.72	0.58	1.00	0.88	0.75	0.6	1.00	1.00	0.76	0.63	1.00	1.00	0.79	0.7	1.00	1.00	0.84	0.70
	ΔT	28	26	22	18	28	26	22	18	28	26	22	19	28	26	22	18	27	25	22	18	28	27	23	19
	KW	1.05	1.05	1.05	1.1	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.44	1.44	1.44	1.45	1.60	1.60	1.59	1.6	1.78	1.78	1.78	1.79
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3
	HI PR	242	243	244	249	279	280	282	286	319	320	321	325	361	362	364	368	406	408	409	413	455	456	458	462
LO PR	127	128	131	136	134	136	139	144	141	142	145	150	146	148	151	156	152	153	156	161	158	160	163	168	
<b>675</b>	MBh	18.8	19.1	19.6	20.4	18.6	18.9	19.4	20.2	18.2	18.4	19.0	19.8	17.4	17.6	18.2	19.0	16.4	16.6	17.2	18.0	15.5	15.7	16.3	17.1
	S/T	1.00	0.86	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.89	0.76	0.6	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71
	ΔT	27	25	21	17	27	25	21	17	27	25	21	18	27	25	21	17	26	24	21	17	28	26	22	18
	KW	1.06	1.06	1.06	1.1	1.18	1.17	1.17	1.18	1.30	1.30	1.30	1.3	1.45	1.44	1.44	1.45	1.60	1.60	1.60	1.6	1.79	1.78	1.78	1.79
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.4	4.5	5.1	5.1	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.2	7.3
	HI PR	244	245	247	251	281	282	284	288	321	322	323	328	363	364	366	370	409	410	411	416	457	458	460	464
LO PR	129	130	134	139	136	138	141	146	143	144	148	153	149	150	153	158	154	155	159	164	161	162	165	171	

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>550</b>	MBh	18.5	18.8	19.3	20.2	18.4	18.6	19.2	20.0	17.9	18.2	18.7	19.5	17.1	17.4	17.9	18.7	16.1	16.4	16.9	17.7	15.2	15.5	16.0	16.8
	S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.79	0.65	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	27	24
	KW	1.05	1.05	1.05	1.06	1.17	1.17	1.17	1.17	1.30	1.30	1.30	1.30	1.44	1.44	1.44	1.44	1.60	1.59	1.59	1.60	1.78	1.78	1.78	1.79
	Amps	3.9	3.9	3.9	3.9	4.4	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3
	HI PR	241	242	244	248	279	280	282	286	318	319	321	325	361	362	363	367	406	407	409	413	455	456	458	462
LO PR	127	128	132	137	134	136	139	144	141	143	146	151	147	148	151	156	152	153	157	162	159	160	163	169	
<b>600</b>	MBh	18.7	19.0	19.5	20.4	18.6	18.8	19.4	20.2	18.1	18.4	18.9	19.7	17.3	17.6	18.1	18.9	16.3	16.6	17.1	17.9	15.4	15.7	16.2	17.0
	S/T	1.00	0.95	0.81	0.67	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.75	1.00	1.00	1.00	0.80
	ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	26	22	32	30	27	23
	KW	1.06	1.06	1.05	1.06	1.17	1.17	1.17	1.18	1.30	1.30	1.30	1.31	1.44	1.44	1.44	1.45	1.60	1.60	1.60	1.61	1.78	1.78	1.78	1.79
	Amps	3.9	3.9	3.9	3.9	4.5	4.4	4.4	4.5	5.0	5.0	5.0	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.2	7.2	7.2	7.3
	HI PR	243	244	246	250	280	281	283	287	320	321	322	327	362	363	365	369	408	409	410	414	456	457	459	463
LO PR	128	130	133	138	136	137	141	146	142	144	147	152	148	149	153	158	153	155	158	163	160	162	165	170	
<b>675</b>	MBh	19.1	19.4	19.9	20.7	18.9	19.2	19.7	20.5	18.5	18.7	19.3	20.1	17.7	17.9	18.5	19.3	16.7	16.9	17.5	18.3	15.8	16.0	16.6	17.4
	S/T	1.00	0.96	0.83	0.69	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.76	1.00	1.00	1.00	0.81
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	25	21	31	29	26	22
	KW	1.06	1.06	1.06	1.07	1.18	1.18	1.17	1.18	1.31	1.31	1.30	1.31	1.45	1.45	1.44	1.45	1.60	1.60	1.60	1.61	1.79	1.79	1.79	1.79
	Amps	3.9	3.9	3.9	4.0	4.5	4.5	4.5	4.5	5.1	5.1	5.1	5.1	5.7	5.7	5.7	5.7	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3
	HI PR	245	246	248	252	283	284	285	289	322	323	325	329	364	365	367	371	410	411	412	417	458	459	461	465
LO PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	160	166	163	164	167	172	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



IDB		Outdoor Ambient Temperature															115														
		65					75					85					95					105									
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75					
		Entering Indoor Wet Bulb Temperature																													
Airflow		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
<b>700</b>	MBh	23.9	24.2	25.0	-	-	23.7	24.0	24.7	-	-	23.1	23.4	24.1	-	-	22.0	22.4	23.1	-	-	20.7	21.1	21.8	-	-	19.5	19.9	20.6	-	-
	S/T	0.6	0.6	0.4	-	-	0.6	0.6	0.4	-	-	0.7	0.6	0.5	-	-	0.7	0.6	0.5	-	-	1.0	0.6	0.5	-	-	1.0	0.7	0.6	-	-
	ΔT	20	18	14	-	-	20	18	14	-	-	20	18	15	-	-	20	18	14	-	-	20	18	14	-	-	21	19	15	-	-
	kW	1.4	1.4	1.4	-	-	1.6	1.6	1.6	-	-	1.7	1.7	1.7	-	-	1.9	1.9	1.9	-	-	2.2	2.2	2.1	-	-	2.4	2.4	2.4	-	-
	Amps	5.2	5.2	5.2	-	-	5.9	5.9	5.9	-	-	6.7	6.7	6.7	-	-	7.6	7.6	7.6	-	-	8.6	8.6	8.6	-	-	9.8	9.8	9.8	-	-
<b>800</b>	HI PR	254	255	257	-	-	294	295	297	-	-	335	337	338	-	-	380	381	383	-	-	429	430	431	-	-	480	481	483	-	-
	LO PR	124	125	128	-	-	131	132	136	-	-	137	139	142	-	-	143	144	148	-	-	148	150	153	-	-	155	157	160	-	-
	MBh	24.3	24.7	25.4	-	-	24.1	24.5	25.2	-	-	23.5	23.9	24.6	-	-	22.5	22.8	23.5	-	-	21.2	21.5	22.2	-	-	20.0	20.3	21.0	-	-
	S/T	0.7	0.6	0.5	-	-	0.7	0.6	0.5	-	-	0.7	0.6	0.5	-	-	1.0	0.6	0.5	-	-	1.0	0.7	0.5	-	-	1.0	0.7	0.6	-	-
	ΔT	19	17	13	-	-	19	17	13	-	-	19	17	13	-	-	19	17	13	-	-	19	17	13	-	-	20	18	14	-	-
<b>900</b>	kW	1.4	1.4	1.4	-	-	1.6	1.6	1.6	-	-	1.7	1.7	1.7	-	-	1.9	1.9	1.9	-	-	2.2	2.2	2.2	-	-	2.4	2.4	2.4	-	-
	Amps	5.2	5.2	5.2	-	-	6.0	5.9	5.9	-	-	6.8	6.8	6.8	-	-	7.7	7.7	7.7	-	-	8.7	8.7	8.7	-	-	9.9	9.8	9.8	-	-
	HI PR	256	257	259	-	-	296	297	299	-	-	338	339	341	-	-	383	384	385	-	-	431	432	434	-	-	483	484	485	-	-
	LO PR	126	127	130	-	-	133	135	138	-	-	140	141	144	-	-	145	147	150	-	-	151	152	155	-	-	157	159	162	-	-
	MBh	24.9	25.2	25.9	-	-	24.7	25.0	25.7	-	-	24.0	24.4	25.1	-	-	23.0	23.3	24.0	-	-	21.7	22.0	22.7	-	-	20.5	20.8	21.5	-	-
<b>700</b>	S/T	0.7	0.6	0.5	-	-	0.7	0.6	0.5	-	-	0.7	0.6	0.5	-	-	1.0	0.7	0.5	-	-	1.0	0.7	0.5	-	-	1.0	0.7	0.6	-	-
	ΔT	18	16	12	-	-	18	16	12	-	-	18	16	13	-	-	18	16	12	-	-	18	16	12	-	-	19	17	13	-	-
	kW	1.4	1.4	1.4	-	-	1.6	1.6	1.6	-	-	1.8	1.8	1.8	-	-	1.9	1.9	1.9	-	-	2.2	2.2	2.2	-	-	2.4	2.4	2.4	-	-
	Amps	5.2	5.2	5.2	-	-	6.0	6.0	6.0	-	-	6.8	6.8	6.8	-	-	7.7	7.7	7.7	-	-	8.7	8.7	8.7	-	-	9.9	9.9	9.9	-	-
	HI PR	259	260	262	-	-	299	300	301	-	-	340	341	343	-	-	385	386	388	-	-	433	435	436	-	-	485	486	488	-	-
<b>75</b>	LO PR	128	130	133	-	-	136	137	141	-	-	142	144	147	-	-	148	149	152	-	-	153	155	158	-	-	160	162	165	-	-
	MBh	23.9	24.3	25.0	26.0	26.0	23.7	24.0	24.8	25.8	25.8	23.1	23.4	24.1	25.2	25.2	22.0	<b>22.4</b>	23.1	24.2	24.2	20.7	21.1	21.8	22.9	22.9	19.6	19.9	20.6	21.7	
	S/T	0.8	0.7	0.6	0.4	0.4	0.8	0.7	0.6	0.4	0.4	1.0	0.7	0.6	0.4	0.4	1.0	<b>0.7</b>	0.6	0.5	0.5	1.0	0.8	0.6	0.5	0.5	1.0	1.0	0.7	0.5	
	ΔT	24	22	19	15	15	24	22	19	15	15	25	23	19	15	15	24	<b>22</b>	19	15	15	24	22	18	15	15	25	23	20	16	
	kW	1.4	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.7	1.9	<b>1.9</b>	1.9	1.9	1.9	2.2	2.2	2.1	2.2	2.2	2.4	2.4	2.4	2.4	
<b>800</b>	Amps	5.2	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.0	6.7	6.7	6.7	6.8	6.8	7.6	<b>7.6</b>	7.6	7.7	7.7	8.6	8.6	8.6	8.7	8.7	9.8	9.8	9.8	9.9	
	HI PR	254	255	257	261	261	294	295	297	301	301	336	337	338	343	343	380	<b>382</b>	383	388	388	429	430	432	436	436	480	481	483	488	
	LO PR	124	125	128	133	133	131	132	136	141	141	137	139	142	147	147	143	<b>144</b>	148	153	153	148	150	153	158	158	155	157	160	165	
	MBh	24.4	24.7	25.4	26.5	26.5	24.1	24.5	25.2	26.3	26.3	23.5	23.9	24.6	25.6	25.6	22.5	<b>22.8</b>	23.5	24.6	24.6	21.2	21.5	22.2	23.3	23.3	20.0	20.3	21.0	22.1	
	S/T	0.8	0.7	0.6	0.5	0.5	1.0	0.7	0.6	0.5	0.5	1.0	0.8	0.6	0.5	0.5	1.0	<b>0.8</b>	0.6	0.5	0.5	1.0	0.8	0.7	0.5	0.5	1.0	1.0	0.7	0.6	
<b>900</b>	ΔT	23	21	18	14	14	23	21	18	14	14	23	21	18	14	14	23	<b>21</b>	18	14	14	23	21	17	13	13	24	22	18	15	
	kW	1.4	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.8	1.9	<b>1.9</b>	1.9	2.0	2.0	2.2	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4	
	Amps	5.2	5.2	5.2	5.2	5.2	6.0	5.9	5.9	6.0	6.0	6.8	6.8	6.8	6.8	6.8	7.7	<b>7.7</b>	7.7	7.7	7.7	8.7	8.7	8.7	8.7	8.7	9.8	9.8	9.8	9.9	
	HI PR	257	258	259	264	264	296	297	299	304	304	338	339	341	345	345	383	<b>384</b>	386	390	390	431	432	434	438	438	483	484	486	490	
	LO PR	126	127	130	136	136	133	135	138	143	143	140	141	144	150	150	145	<b>147</b>	150	155	155	151	152	155	160	160	157	159	162	167	
<b>700</b>	MBh	24.9	25.2	25.9	27.0	27.0	24.7	25.0	25.7	26.8	26.8	24.1	24.4	25.1	26.2	26.2	23.0	<b>23.3</b>	24.0	25.1	25.1	21.7	22.0	22.7	23.8	23.8	20.5	20.9	21.6	22.6	
	S/T	0.8	0.7	0.6	0.5	0.5	1.0	0.7	0.6	0.5	0.5	1.0	0.8	0.6	0.5	0.5	1.0	<b>0.8</b>	0.6	0.5	0.5	1.0	1.0	0.7	0.5	0.5	1.0	1.0	0.7	0.6	
	ΔT	22	20	17	13	13	22	20	17	13	13	22	20	17	13	13	22	<b>20</b>	17	13	13	22	20	16	12	12	23	21	17	14	
	kW	1.4	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.6	1.8	1.8	1.7	1.8	1.8	1.9	<b>1.9</b>	1.9	2.0	2.0	2.2	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4	
	Amps	5.2	5.2	5.2	5.3	5.3	6.0	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.8	6.8	7.7	<b>7.7</b>	7.7	7.7	7.7	8.7	8.7	8.7	8.7	8.7	9.9	9.9	9.9	9.9	
<b>900</b>	HI PR	259	260	262	266	266	299	300	302	306	306	340	342	343	348	348	385	<b>386</b>	388	393	393	434	435	437	441	441	485	486	488	492	
	LO PR	129	130	133	138	138	136	137	141	146	146	142	144	147	152	152	148	<b>149</b>	153	158	158	153	155	158	163	163	160	162	165	170	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

		Outdoor Ambient Temperature																							
		65				75				85				95				105				115			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>700</b>	MBh	24.0	24.4	25.1	26.2	23.8	24.2	24.9	26.0	23.2	23.6	24.3	25.3	22.2	22.5	23.2	24.3	20.9	21.2	21.9	23.0	20.9	21.2	21.9	23.0
	S/T	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	1.0	0.7	1.0	1.0	1.0	0.6
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	28	26	23	19	28	26	23	19
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.9	1.9	1.9	1.9	2.2	2.2	2.2	2.1	2.2	2.2	2.2	2.1
	Amps	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7	8.6	8.6	8.6	8.7	8.6	8.6	8.6	8.7
<b>800</b>	HI PR	255	256	258	262	294	296	297	302	336	337	339	343	381	382	384	388	429	430	432	437	481	482	484	488
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	143	145	148	153	149	150	153	159	156	157	160	165
	MBh	24.5	24.8	25.5	26.6	24.3	24.6	25.3	26.4	23.7	24.0	24.7	25.8	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.2	22.2
	S/T	1.0	0.8	0.7	0.6	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.7
	ΔT	28	26	22	18	28	26	22	18	28	26	22	18	27	26	22	18	27	25	22	18	28	26	23	19
<b>900</b>	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
	Amps	5.2	5.2	5.2	5.3	6.0	5.9	5.9	6.0	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.8	9.8	9.9
	HI PR	257	258	260	264	297	298	300	304	338	340	341	346	383	384	386	391	432	433	435	439	483	484	486	490
	LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	159	163	168
	MBh	25.0	25.3	26.1	27.1	24.8	25.1	25.8	26.9	24.2	24.5	25.2	26.3	23.1	23.5	24.2	25.2	21.8	22.2	22.9	23.9	20.6	21.0	21.7	22.8
<b>700</b>	S/T	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7
	ΔT	27	25	21	17	27	25	21	17	27	25	21	17	26	25	21	17	26	24	21	17	27	25	22	18
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.8	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
	Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.9	9.9	9.9
	HI PR	260	261	262	267	299	300	302	307	341	342	344	348	386	387	389	393	434	435	437	441	486	487	489	493
<b>800</b>	LO PR	129	131	134	139	136	138	141	146	143	144	148	153	148	150	153	158	154	155	158	164	161	162	165	170
	MBh	24.4	24.8	25.5	26.6	24.2	24.6	25.3	26.4	23.6	24.0	24.7	25.7	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2
	S/T	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7
	ΔT	33	31	27	23	32	31	27	23	33	31	27	23	32	31	27	23	32	30	27	23	33	31	28	24
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.8	1.9	1.9	1.9	1.9	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
<b>85</b>	Amps	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.8	6.8	6.7	6.8	7.7	7.6	7.6	7.7	8.7	8.7	8.6	8.7	9.8	9.8	9.8	9.9
	HI PR	256	257	259	263	296	297	299	303	337	338	340	345	382	383	385	389	430	432	433	438	482	483	485	489
	LO PR	126	127	131	136	133	135	138	143	140	141	144	150	145	147	150	155	151	152	155	160	157	159	162	167
	MBh	24.9	25.2	25.9	27.0	24.7	25.0	25.7	26.8	24.1	24.4	25.1	26.2	23.0	23.3	24.0	25.1	21.7	22.0	22.7	23.8	20.5	20.8	21.5	22.6
	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.8	0.7
<b>900</b>	ΔT	31	29	26	22	31	29	26	22	32	30	26	22	31	29	26	22	31	29	25	22	32	30	27	23
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.7	1.7	1.8	1.9	1.9	1.9	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
	Amps	5.2	5.2	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.8	7.7	7.7	7.7	7.7	8.7	8.7	8.7	8.7	9.9	9.9	9.8	9.9
	HI PR	258	259	261	266	298	299	301	305	340	341	343	347	384	386	387	392	433	434	436	440	484	486	487	492
	LO PR	128	130	133	138	136	137	140	145	142	144	147	152	148	149	152	157	153	154	158	163	160	161	164	170
<b>700</b>	MBh	25.4	25.7	26.4	27.5	25.2	25.5	26.2	27.3	24.6	24.9	25.6	26.7	23.5	23.9	24.6	25.6	22.2	22.6	23.3	24.3	21.0	21.4	22.1	23.2
	S/T	1.0	0.9	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.9	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7
	ΔT	30	28	25	21	30	28	25	21	31	29	25	21	30	28	25	21	30	28	24	21	31	29	26	22
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.8	1.8	1.8	1.8	2.0	2.0	2.0	2.0	2.2	2.2	2.2	2.2	2.4	2.4	2.4	2.4
	Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.0	6.8	6.8	6.8	6.9	7.7	7.7	7.7	7.8	8.7	8.7	8.7	8.7	9.9	9.9	9.9	9.9
<b>800</b>	HI PR	261	262	264	268	300	302	303	308	342	343	345	349	387	388	390	394	435	436	438	443	487	488	490	494
	LO PR	131	132	135	141	138	140	143	148	145	146	149	155	150	152	155	160	156	157	160	165	162	164	167	172
	MBh	24.4	24.8	25.5	26.6	24.2	24.6	25.3	26.4	23.6	24.0	24.7	25.7	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.1	22.2
	S/T	1.0	0.9	0.8	0.6	1.0	0.9	0.8	0.6	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7	1.0	1.0	0.8	0.7
	ΔT	33	31	27	23	32	31	27	23	33	31	27	23	32	31	27	23	32	30	27	23	33	31	28	24

		Outdoor Ambient Temperature																							
		65				75				85				95				105				115			
IDB	Airflow	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>700</b>	MBh	24.0	24.4	25.1	26.2	23.8	24.2	24.9	26.0	23.2	23.6	24.3	25.3	22.2	22.5	23.2	24.3	20.9	21.2	21.9	23.0	20.9	21.2	21.9	23.0
	S/T	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.5	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	1.0	0.7	1.0	1.0	1.0	0.6
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	28	26	23	19	28	26	23	19
	kW	1.4	1.4	1.4	1.4	1.6	1.6	1.6	1.6	1.7	1.7	1.7	1.7	1.9	1.9	1.9	1.9	2.2	2.2	2.2	2.1	2.2	2.2	2.2	2.1
	Amps	5.2	5.2	5.2	5.2	5.9	5.9	5.9	6.0	6.7	6.7	6.7	6.8	7.6	7.6	7.6	7.7	8.6	8.6	8.6	8.7	8.6	8.6	8.6	8.7
<b>800</b>	HI PR	255	256	258	262	294	296	297	302	336	337	339	343	381	382	384	388	429	430	432	437	481	482	484	488
	LO PR	124	126	129	134	132	133	136	141	138	140	143	148	143	145	148	153	149	150	153	159	156	157	160	165
	MBh	24.5	24.8	25.5	26.6	24.3	24.6	25.3	26.4	23.7	24.0	24.7	25.8	22.6	22.9	23.6	24.7	21.3	21.6	22.3	23.4	20.1	20.4	21.2	22.2
	S/T	1.0	0.8	0.7	0.6	1.0	0.8	0.7	0.6	1.0	0.9	0.7	0.6	1.0	1.0	0.8									



IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>80</b>	MBh	24.7	25.0	25.7	26.8	24.5	24.8	25.5	26.6	23.8	24.2	24.9	26.0	22.7	23.1	23.8	24.9	21.4	21.7	22.5	23.6	20.2	20.5	21.3	22.4
	S/T	0.87	0.80	0.67	0.5	1.00	0.80	0.67	0.54	1.00	0.83	0.70	0.6	1.00	0.84	0.72	0.58	1.00	1.00	0.74	0.6	1.00	1.00	0.79	0.65
	ΔT	29	27	23	20	29	27	23	20	29	27	24	20	29	27	23	20	29	27	23	19	30	28	24	21
	KW	1.41	1.40	1.40	1.4	1.57	1.57	1.57	1.58	1.75	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.43	2.43	2.43	2.44
	Amps	5.3	5.3	5.2	5.3	6.0	6.0	6.0	6.1	6.9	6.8	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0
	HI PR	254	255	257	261	293	294	296	301	335	336	338	342	380	381	382	388	428	429	431	435	479	480	482	486
LO PR	122	123	126	131	129	130	133	139	135	137	140	145	141	142	145	150	146	147	150	156	153	154	157	162	
<b>80</b>	MBh	25.1	25.5	26.2	27.3	24.9	25.2	26.0	27.1	24.3	24.6	25.3	26.4	23.2	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	21.0	21.7	22.8
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	0.88	0.75	0.62	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.69
	ΔT	28	26	22	18	28	26	22	18	28	26	23	19	28	26	22	18	28	26	22	18	29	27	23	19
	KW	1.41	1.41	1.41	1.4	1.58	1.58	1.57	1.59	1.76	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.44	2.44	2.44	2.45
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.0
	HI PR	256	257	259	263	296	297	299	303	337	338	340	344	382	383	385	389	430	431	433	437	481	483	484	489
LO PR	124	125	128	133	131	133	136	141	138	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	
<b>900</b>	MBh	25.7	26.0	26.7	27.8	25.4	25.8	26.5	27.6	24.8	25.2	25.9	27.0	23.7	24.1	24.8	25.9	22.4	22.7	23.5	24.6	21.2	21.5	22.2	23.3
	S/T	1.00	0.84	0.71	0.6	1.00	0.84	0.72	0.58	1.00	0.87	0.74	0.6	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.69
	ΔT	27	25	21	17	27	25	21	17	27	25	22	18	27	25	21	17	27	25	21	17	28	26	22	18
	KW	1.42	1.42	1.42	1.4	1.58	1.58	1.58	1.59	1.77	1.77	1.76	1.8	1.97	1.97	1.96	1.98	2.19	2.19	2.19	2.2	2.45	2.45	2.45	2.46
	Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1
	HI PR	259	260	261	266	298	299	301	305	340	341	343	347	384	385	387	392	433	434	435	440	484	485	487	491
LO PR	126	128	131	136	134	135	138	143	140	142	145	150	145	147	150	155	151	152	155	160	157	159	162	167	

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>700</b>	MBh	25.1	25.4	26.1	27.2	24.9	25.2	25.9	27.0	24.2	24.6	25.3	26.4	23.1	23.5	24.2	25.3	21.8	22.2	22.9	24.0	20.6	20.9	21.7	22.8
	S/T	1.00	0.89	0.76	0.63	1.00	0.90	0.77	0.63	1.00	1.00	0.79	0.66	1.00	1.00	0.81	0.68	1.00	1.00	0.83	0.70	1.00	1.00	1.00	0.75
	ΔT	33	31	27	24	33	31	27	23	33	31	28	24	33	31	27	23	33	31	27	23	34	32	28	24
	KW	1.41	1.41	1.40	1.42	1.57	1.57	1.57	1.58	1.76	1.76	1.75	1.76	1.96	1.95	1.95	1.96	2.18	2.18	2.17	2.19	2.44	2.44	2.43	2.45
	Amps	5.3	5.3	5.3	5.3	6.0	6.0	6.0	6.1	6.9	6.9	6.8	6.9	7.8	7.8	7.8	7.8	8.8	8.8	8.8	8.8	10.0	10.0	10.0	10.0
	HI PR	255	256	258	262	295	296	297	302	336	337	339	343	381	382	384	388	429	430	432	436	480	481	483	488
LO PR	123	125	128	133	131	132	135	140	137	139	142	147	142	144	147	152	148	149	152	157	154	156	159	164	
<b>800</b>	MBh	25.5	25.9	26.6	27.7	25.3	25.6	26.4	27.5	24.7	25.0	25.7	26.8	23.6	23.9	24.7	25.8	22.3	22.6	23.3	24.4	21.0	21.4	22.1	23.2
	S/T	1.00	0.93	0.80	0.66	1.00	0.93	0.80	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	1.00	0.78
	ΔT	32	30	26	22	32	30	26	22	32	30	26	23	32	30	26	22	32	30	26	22	33	31	27	23
	KW	1.42	1.42	1.41	1.42	1.58	1.58	1.58	1.59	1.76	1.76	1.76	1.77	1.96	1.96	1.96	1.97	2.19	2.18	2.18	2.19	2.45	2.44	2.44	2.45
	Amps	5.3	5.3	5.3	5.3	6.1	6.1	6.0	6.1	6.9	6.9	6.9	6.9	7.8	7.8	7.8	7.9	8.8	8.8	8.8	8.9	10.0	10.0	10.0	10.1
	HI PR	257	258	260	265	297	298	300	304	338	339	341	346	383	384	386	390	431	432	434	438	483	484	485	490
LO PR	126	127	130	135	133	134	137	143	139	141	144	149	145	146	149	154	150	151	154	160	157	158	161	166	
<b>900</b>	MBh	26.1	26.4	27.1	28.2	25.9	26.2	26.9	28.0	25.2	25.6	26.3	27.4	24.1	24.5	25.2	26.3	22.8	23.1	23.9	25.0	21.6	21.9	22.7	23.8
	S/T	1.00	0.93	0.81	0.67	1.00	1.00	0.81	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.85	0.72	1.00	1.00	0.87	0.74	1.00	1.00	1.00	0.79
	ΔT	31	29	25	21	31	29	25	21	31	29	25	22	31	29	25	21	31	29	25	21	32	30	26	22
	KW	1.42	1.42	1.42	1.43	1.59	1.59	1.58	1.60	1.77	1.77	1.77	1.78	1.97	1.97	1.97	1.98	2.19	2.19	2.19	2.20	2.45	2.45	2.45	2.46
	Amps	5.3	5.3	5.3	5.4	6.1	6.1	6.1	6.1	6.9	6.9	6.9	7.0	7.8	7.8	7.8	7.9	8.9	8.9	8.8	8.9	10.1	10.0	10.0	10.1
	HI PR	260	261	263	267	299	300	302	307	341	342	344	348	386	387	388	393	434	435	437	441	485	486	488	492
LO PR	128	130	133	138	136	137	140	145	142	143	146	151	147	149	152	157	153	154	157	162	159	161	164	169	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>80</b>	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.4	28.9	29.7	31.1	27.1	27.5	28.4	29.8	25.5	25.9	26.8	28.1	24.0	24.5	25.3	26.7
	S/T	1.00	0.77	0.63	0.5	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.5	1.00	1.00	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20
	KW	1.76	1.75	1.75	1.8	1.95	1.95	1.95	1.96	2.17	2.17	2.17	2.2	2.41	2.41	2.41	2.42	2.68	2.68	2.67	2.7	2.99	2.99	2.99	3.00
	Amps	6.4	6.4	6.3	6.4	7.3	7.3	7.3	7.3	8.3	8.3	8.3	8.3	9.4	9.4	9.4	9.4	10.6	10.6	10.6	10.6	12.0	12.0	12.0	12.1
	HI PR	250	251	253	257	290	291	292	297	331	332	334	338	375	376	378	382	423	424	426	430	474	475	477	481
LO PR	124	126	129	134	132	133	136	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166	
<b>80</b>	MBh	29.9	30.3	31.1	32.5	29.6	30.0	30.9	32.2	28.8	29.2	30.1	31.5	27.5	27.9	<b>28.8</b>	30.1	25.9	26.3	27.2	28.5	24.4	24.8	25.7	27.1
	S/T	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	1.00	<b>0.74</b>	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	<b>21</b>	18	26	25	21	18	28	26	22	19
	KW	1.77	1.76	1.76	1.8	1.96	1.96	1.96	1.97	2.18	2.18	2.18	2.2	2.42	2.42	<b>2.42</b>	2.43	2.69	2.69	2.68	2.7	3.00	3.00	3.00	3.01
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	<b>9.4</b>	9.5	10.6	10.6	10.6	10.7	12.1	12.1	12.0	12.1
	HI PR	252	253	255	259	292	293	295	299	333	334	336	340	377	378	<b>380</b>	385	425	426	428	432	476	477	479	484
LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	<b>150</b>	156	151	153	156	161	158	160	163	168	
<b>1125</b>	MBh	30.3	30.7	31.6	32.9	30.1	30.5	31.3	32.7	29.3	29.7	30.6	31.9	28.0	28.4	29.3	30.6	26.4	26.8	27.7	29.0	24.9	25.3	26.2	27.5
	S/T	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.6	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18
	KW	1.78	1.77	1.77	1.8	1.97	1.97	1.97	1.98	2.19	2.19	2.19	2.2	2.43	2.43	2.43	2.44	2.70	2.70	2.69	2.7	3.01	3.01	3.01	3.02
	Amps	6.5	6.5	6.4	6.5	7.4	7.4	7.3	7.4	8.4	8.4	8.3	8.4	9.5	9.5	9.4	9.5	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2
	HI PR	254	255	257	262	294	295	297	301	335	336	338	342	379	380	382	387	427	428	430	434	478	479	481	486
LO PR	128	130	133	138	136	137	140	146	142	144	147	152	148	149	152	158	153	155	158	163	160	162	165	170	

		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>85</b>	MBh	30.0	30.4	31.3	32.6	29.7	30.1	31.0	32.3	28.9	29.3	30.2	31.6	27.6	28.0	28.9	30.2	26.0	26.4	27.3	28.6	24.5	25.0	25.8	27.2
	S/T	1.00	0.86	0.73	0.59	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	1.00	0.71
	ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	29	26	22	32	30	27	24
	KW	1.76	1.76	1.76	1.77	1.96	1.96	1.95	1.97	2.18	2.18	2.17	2.19	2.42	2.41	2.41	2.43	2.68	2.68	2.68	2.69	3.00	2.99	2.99	3.01
	Amps	6.4	6.4	6.4	6.4	7.3	7.3	7.3	7.3	8.3	8.3	8.3	8.3	9.4	9.4	9.4	9.4	10.6	10.6	10.6	10.7	12.0	12.0	12.0	12.1
	HI PR	251	252	254	259	291	292	294	298	332	333	335	339	376	377	379	384	424	425	427	431	475	476	478	483
LO PR	126	128	131	136	134	135	138	144	140	142	145	150	146	147	150	156	151	153	156	161	158	160	163	168	
<b>1000</b>	MBh	30.0	31.0	32.0	33.0	30.0	30.0	31.0	32.0	29.0	30.0	31.0	32.0	28.0	28.0	29.0	31.0	26.0	27.0	28.0	29.0	25.0	25.0	26.0	28.0
	S/T	1.00	0.92	0.79	0.65	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77
	ΔT	30	29	25	22	30	29	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22
	KW	1.77	1.77	1.77	1.78	1.97	1.97	1.96	1.98	2.19	2.19	2.18	2.20	2.43	2.42	2.42	2.44	2.69	2.69	2.69	2.70	3.01	3.00	3.00	3.02
	Amps	6.4	6.4	6.4	6.5	7.3	7.3	7.3	7.4	8.3	8.3	8.3	8.4	9.4	9.4	9.4	9.5	10.7	10.7	10.6	10.7	12.1	12.1	12.1	12.1
	HI PR	253	255	256	261	293	294	296	300	334	335	337	341	379	380	381	386	426	427	429	434	477	479	480	485
LO PR	128	129	133	138	135	137	140	145	142	144	147	152	148	149	152	158	153	155	158	163	160	161	165	170	
<b>1125</b>	MBh	31.0	31.0	32.0	33.0	31.0	31.0	32.0	33.0	30.0	30.0	31.0	32.0	28.0	29.0	30.0	31.0	27.0	27.0	28.0	29.0	25.0	26.0	27.0	28.0
	S/T	1.00	0.96	0.82	0.68	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	1.00	0.76	1.00	1.00	1.00	0.81
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	22
	KW	1.78	1.78	1.77	1.79	1.98	1.97	1.97	1.99	2.20	2.20	2.19	2.21	2.44	2.43	2.43	2.45	2.70	2.70	2.70	2.71	3.01	3.01	3.01	3.02
	Amps	6.5	6.5	6.5	6.5	7.4	7.4	7.4	7.4	8.4	8.4	8.4	8.4	9.5	9.5	9.5	9.5	10.7	10.7	10.7	10.7	12.1	12.1	12.1	12.2
	HI PR	256	257	258	263	295	296	298	302	336	337	339	343	381	382	383	388	428	430	431	436	480	481	482	487
LO PR	130	131	135	140	137	139	142	147	144	146	149	154	150	151	154	160	155	157	160	165	162	163	167	172	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>70</b>	MBh	29.1	29.5	30.4	-	28.8	29.2	30.1	-	28.1	28.5	29.4	-	26.8	27.2	28.0	-	25.2	25.6	26.5	-	23.7	24.1	25.0	-
	S/T	0.63	0.55	0.41	-	0.63	0.56	0.42	-	0.66	0.58	0.44	-	0.68	0.60	0.46	-	1.00	0.62	0.48	-	1.00	0.68	0.54	-
	ΔT	20	18	15	-	20	18	15	-	20	19	15	-	20	18	15	-	20	18	15	-	21	19	16	-
	KW	1.72	1.72	1.72	-	1.91	1.91	1.91	-	2.13	2.12	2.12	-	2.36	2.35	2.35	-	2.61	2.61	2.61	-	2.92	2.92	2.91	-
	Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.0	8.0	-	9.1	9.1	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-
	HI PR	244	245	247	-	282	283	285	-	323	324	325	-	366	367	369	-	413	414	416	-	463	464	466	-
	LO PR	123	124	127	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-
	MBh	29.5	29.9	30.8	-	29.2	29.6	30.5	-	28.5	28.9	29.7	-	27.2	27.6	28.4	-	25.6	26.0	26.8	-	24.1	24.5	25.4	-
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.72	0.64	0.50	-	1.00	0.66	0.52	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-
	ΔT	19	17	14	-	19	17	14	-	19	17	14	-	19	17	14	-	19	17	13	-	20	18	15	-
KW	1.73	1.73	1.73	-	1.92	1.92	1.92	-	2.14	2.13	2.13	-	2.37	2.36	2.36	-	2.62	2.62	2.62	-	2.93	2.93	2.92	-	
Amps	6.2	6.2	6.2	-	7.1	7.1	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.1	-	10.3	10.3	10.3	-	11.7	11.7	11.7	-	
HI PR	246	247	249	-	284	286	287	-	325	326	328	-	368	369	371	-	415	416	418	-	465	466	468	-	
LO PR	124	126	129	-	132	133	136	-	138	140	143	-	144	145	149	-	149	151	154	-	156	158	161	-	
MBh	29.9	30.3	31.2	-	29.7	30.1	31.0	-	28.9	29.3	30.2	-	27.6	28.0	28.9	-	26.0	26.4	27.3	-	24.6	25.0	25.8	-	
S/T	0.73	0.65	0.51	-	0.73	0.65	0.51	-	0.76	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.72	0.58	-	1.00	0.78	0.63	-	
ΔT	18	16	13	-	18	16	13	-	18	16	13	-	18	16	13	-	18	16	12	-	19	17	14	-	
KW	1.74	1.74	1.73	-	1.93	1.93	1.92	-	2.14	2.14	2.14	-	2.37	2.37	2.37	-	2.63	2.63	2.63	-	2.94	2.93	2.93	-	
Amps	6.3	6.3	6.3	-	7.2	7.2	7.1	-	8.1	8.1	8.1	-	9.2	9.2	9.2	-	10.4	10.4	10.4	-	11.8	11.8	11.7	-	
HI PR	248	249	251	-	286	288	289	-	327	328	330	-	370	371	373	-	417	418	420	-	467	468	470	-	
LO PR	126	128	131	-	134	135	138	-	140	142	145	-	146	147	151	-	151	153	156	-	158	160	163	-	
<b>75</b>	MBh	29.1	29.5	30.4	31.7	28.9	29.3	30.1	31.5	28.1	28.5	29.4	30.7	26.8	27.2	28.1	29.4	25.2	25.6	26.5	27.8	23.7	24.1	25.0	26.3
	S/T	0.76	0.68	0.54	0.39	0.77	0.69	0.55	0.40	1.00	0.72	0.57	0.43	1.00	0.74	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.52
	ΔT	24	22	19	15	24	22	19	15	25	23	19	16	24	22	19	15	24	22	19	15	25	23	20	16
	KW	1.72	1.72	1.71	1.73	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.13	2.36	2.35	2.35	2.36	2.61	2.61	2.61	2.62	2.92	2.92	2.91	2.93
	Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.0	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7
	HI PR	244	245	247	251	283	284	285	290	323	324	326	330	366	367	369	373	413	414	416	420	463	464	466	470
	LO PR	123	124	127	132	130	132	135	140	137	138	141	146	142	144	147	152	148	149	152	157	154	156	159	164
	MBh	29.5	29.9	30.8	32.1	29.2	29.6	30.5	31.8	28.5	28.9	29.8	31.1	27.2	27.6	28.4	29.8	25.6	26.0	26.9	28.2	24.1	24.5	25.4	26.7
	S/T	0.82	0.75	0.60	0.46	0.83	0.75	0.61	0.46	1.00	0.78	0.64	0.49	1.00	0.80	0.66	0.51	1.00	0.82	0.68	0.53	1.00	1.00	0.73	0.59
	ΔT	23	21	18	14	23	21	18	14	23	22	18	14	23	21	18	14	23	21	18	14	24	22	19	15
KW	1.73	1.73	1.72	1.74	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.14	2.37	2.36	2.36	2.37	2.62	2.62	2.62	2.63	2.93	2.92	2.92	2.94	
Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.1	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	
HI PR	246	247	249	253	285	286	287	292	325	326	328	332	368	369	371	375	415	416	418	422	465	466	468	472	
LO PR	124	126	129	134	132	133	137	142	138	140	143	148	144	145	149	154	149	151	154	159	156	158	161	166	
MBh	30.0	30.4	31.2	32.6	29.7	30.1	31.0	32.3	28.9	29.3	30.2	31.5	27.6	28.0	28.9	30.2	26.0	26.4	27.3	28.6	24.6	25.0	25.9	27.2	
S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.81	0.67	0.52	1.00	0.83	0.69	0.54	1.00	0.86	0.72	0.57	1.00	1.00	0.77	0.62	
ΔT	22	20	17	13	22	20	17	13	22	21	17	13	22	20	17	13	22	20	17	13	23	21	18	14	
KW	1.74	1.74	1.73	1.75	1.93	1.93	1.92	1.94	2.14	2.14	2.14	2.15	2.37	2.37	2.37	2.38	2.63	2.63	2.63	2.64	2.93	2.93	2.93	2.94	
Amps	6.3	6.3	6.3	6.3	7.2	7.1	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8	
HI PR	248	249	251	255	287	288	289	294	327	328	330	334	370	371	373	377	417	418	420	424	467	468	470	474	
LO PR	126	128	131	136	134	135	139	144	140	142	145	150	146	147	151	156	151	153	156	161	158	160	163	168	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>80</b>	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																							
	MBh	29.3	29.7	30.5	31.9	29.0	29.4	30.3	31.6	28.2	28.7	29.5	30.9	26.9	27.3	28.2	29.5	25.3	25.8	26.6	27.9	23.9	24.3	25.2	26.5
	S/T	1.00	0.81	0.67	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.70	0.6	1.00	0.87	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.80	0.65
	ΔT	28	27	23	19	28	27	23	19	29	27	23	20	28	27	23	19	28	26	23	19	29	27	24	20
	KW	1.72	1.72	1.72	1.7	1.91	1.91	1.91	1.92	2.12	2.12	2.12	2.1	2.36	2.35	2.35	2.37	2.61	2.61	2.61	2.6	2.92	2.92	2.91	2.93
	Amps	6.2	6.2	6.2	6.2	7.1	7.1	7.1	7.1	8.1	8.0	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.3	11.7	11.7	11.7	11.7
HI PR	245	246	247	252	283	284	286	290	323	324	326	330	367	368	370	374	414	415	416	421	464	465	466	471	
LO PR	123	125	128	133	131	132	135	140	137	139	142	147	143	144	147	153	148	150	153	158	155	156	160	165	
MBh	29.6	30.1	30.9	32.3	29.4	29.8	30.7	32.0	28.6	29.0	29.9	31.2	27.3	27.7	28.6	29.9	25.7	26.1	27.0	28.3	24.3	24.7	25.5	26.9	
S/T	1.00	0.88	0.73	0.6	1.00	0.88	0.74	0.59	1.00	0.91	0.77	0.6	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	
ΔT	27	25	22	18	27	25	22	18	28	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19	
KW	1.73	1.73	1.72	1.7	1.92	1.92	1.92	1.93	2.13	2.13	2.13	2.1	2.37	2.36	2.36	2.38	2.62	2.62	2.62	2.6	2.93	2.93	2.92	2.94	
Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.1	9.2	9.2	9.2	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.8	
HI PR	247	248	249	254	285	286	288	292	325	326	328	332	369	370	372	376	416	417	418	423	466	467	468	473	
LO PR	125	126	130	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	155	160	157	158	161	167	
MBh	30.1	30.5	31.4	32.7	29.8	30.3	31.1	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.7	25.1	26.0	27.3	
S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	0.94	0.80	0.7	1.00	1.00	0.82	0.67	1.00	1.00	0.85	0.7	1.00	1.00	0.90	0.75	
ΔT	26	25	21	17	26	24	21	17	27	25	21	18	26	24	21	17	26	24	21	17	27	25	22	18	
KW	1.74	1.74	1.73	1.8	1.93	1.93	1.92	1.94	2.14	2.14	2.14	2.2	2.37	2.37	2.37	2.38	2.63	2.63	2.63	2.6	2.94	2.93	2.93	2.95	
Amps	6.3	6.3	6.3	6.3	7.2	7.2	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.4	10.4	11.8	11.8	11.7	11.8	
HI PR	249	250	251	256	287	288	290	294	327	328	330	334	371	372	374	378	418	419	420	425	468	469	470	475	
LO PR	127	128	132	137	134	136	139	144	141	142	146	151	146	148	151	156	152	153	157	162	159	160	163	169	

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>85</b>	AIRFLOW	ENTERING INDOOR WET BULB TEMPERATURE																							
	MBh	29.8	30.2	31.0	32.4	29.5	29.9	30.8	32.1	28.7	29.1	30.0	31.3	27.4	27.8	28.7	30.0	25.8	26.2	27.1	28.4	24.4	24.8	25.7	27.0
	S/T	1.00	0.92	0.78	0.63	1.00	0.92	0.78	0.64	1.00	1.00	0.81	0.66	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.70	1.00	1.00	1.00	0.76
	ΔT	32	30	27	23	32	30	27	23	32	30	27	23	32	30	27	23	32	30	26	23	33	31	28	24
	KW	1.72	1.72	1.72	1.73	1.91	1.91	1.91	1.92	2.13	2.13	2.12	2.14	2.36	2.36	2.36	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.92	2.93
	Amps	6.2	6.2	6.2	6.3	7.1	7.1	7.1	7.1	8.1	8.1	8.0	8.1	9.1	9.1	9.1	9.2	10.3	10.3	10.3	10.4	11.7	11.7	11.7	11.7
HI PR	246	247	248	253	284	285	287	291	325	326	327	332	368	369	371	375	415	416	417	422	465	466	467	472	
LO PR	125	127	130	135	132	134	137	142	139	141	144	149	145	146	149	154	150	151	155	160	157	158	161	167	
MBh	30.1	30.5	31.4	32.7	29.9	30.3	31.2	32.5	29.1	29.5	30.4	31.7	27.8	28.2	29.1	30.4	26.2	26.6	27.5	28.8	24.8	25.2	26.0	27.4	
S/T	1.00	0.98	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.92	0.77	1.00	1.00	1.00	0.82	
ΔT	31	29	26	22	31	29	26	22	31	29	26	22	31	29	26	22	31	29	25	22	32	30	26	23	
KW	1.73	1.73	1.73	1.74	1.92	1.92	1.92	1.93	2.14	2.14	2.13	2.15	2.37	2.37	2.36	2.38	2.63	2.63	2.62	2.64	2.93	2.93	2.93	2.94	
Amps	6.3	6.3	6.2	6.3	7.1	7.1	7.1	7.2	8.1	8.1	8.1	8.2	9.2	9.2	9.2	9.2	10.4	10.4	10.3	10.4	11.7	11.7	11.7	11.8	
HI PR	248	249	251	255	286	287	289	293	327	328	329	334	370	371	373	377	417	418	420	424	467	468	470	474	
LO PR	127	128	131	137	134	136	139	144	141	142	145	151	146	148	151	156	152	153	156	162	159	160	163	168	
MBh	30.6	31.0	31.9	33.2	30.3	30.7	31.6	32.9	29.6	30.0	30.9	32.2	28.3	28.7	29.5	30.9	26.7	27.1	28.0	29.3	25.2	25.6	26.5	27.8	
S/T	1.00	1.00	0.87	0.73	1.00	1.00	0.88	0.73	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	1.00	0.80	1.00	1.00	1.00	0.86	
ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	26	23	
KW	1.74	1.74	1.74	1.75	1.93	1.93	1.93	1.94	2.15	2.15	2.14	2.16	2.38	2.38	2.37	2.39	2.64	2.63	2.63	2.65	2.94	2.94	2.93	2.95	
Amps	6.3	6.3	6.3	6.3	7.2	7.2	7.2	7.2	8.2	8.1	8.1	8.2	9.2	9.2	9.2	9.3	10.4	10.4	10.4	10.4	11.8	11.8	11.8	11.8	
HI PR	250	251	253	257	288	289	291	295	329	330	331	336	372	373	375	379	419	420	422	426	469	470	472	476	
LO PR	129	130	133	139	136	138	141	146	143	144	147	153	148	150	153	158	154	155	158	164	161	162	165	170	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												105												115																					
		65						75						85						95						105						115															
		ENTERING INDOOR WET BULB TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE									
AIRFLOW	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79	59	63	67	71	75	79											
<b>1050</b>	MBh	34.8	35.3	36.3	-	34.5	35.0	36.0	-	33.6	34.1	35.1	-	32.0	32.5	33.5	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-	30.1	30.6	31.6	-	28.4	28.8	29.9	-						
	S/T	0.59	0.52	0.38	-	0.60	0.52	0.39	-	0.62	0.55	0.42	-	0.64	0.57	0.43	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-	1.00	0.59	0.46	-	1.00	0.64	0.51	-						
	ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	19	17	14	-	20	18	15	-	19	17	14	-	20	18	15	-						
	KW	2.09	2.09	2.09	-	2.32	2.32	2.32	-	2.58	2.58	2.58	-	2.87	2.86	2.86	-	3.18	3.18	3.17	-	3.55	3.55	3.54	-	3.18	3.18	3.17	-	3.55	3.55	3.54	-	3.18	3.18	3.17	-	3.55	3.55	3.54	-						
	Amps	7.6	7.6	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-						
	HI PR	254	255	257	-	294	295	297	-	336	337	338	-	381	382	384	-	430	431	433	-	482	483	485	-	430	431	433	-	482	483	485	-	430	431	433	-	482	483	485	-						
LO PR	121	123	126	-	129	130	133	-	135	137	140	-	141	142	145	-	146	147	151	-	153	154	157	-	146	147	151	-	153	154	157	-	146	147	151	-	153	154	157	-							
<b>1200</b>	MBh	35.3	35.7	36.8	-	34.9	35.4	36.5	-	34.0	34.5	35.6	-	32.5	33.0	34.0	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-	30.6	31.0	32.1	-	28.8	29.3	30.3	-						
	S/T	0.65	0.58	0.44	-	0.66	0.58	0.45	-	0.68	0.61	0.47	-	0.70	0.63	0.49	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-	1.00	0.65	0.51	-	1.00	0.70	0.56	-						
	ΔT	18	16	13	-	18	16	13	-	18	17	13	-	18	16	13	-	18	16	13	-	19	17	14	-	18	16	13	-	19	17	14	-	18	16	13	-	19	17	14	-						
	KW	2.10	2.10	2.10	-	2.34	2.33	2.33	-	2.60	2.59	2.59	-	2.88	2.88	2.87	-	3.19	3.19	3.19	-	3.56	3.56	3.55	-	3.19	3.19	3.19	-	3.56	3.56	3.55	-	3.19	3.19	3.19	-	3.56	3.56	3.55	-						
	Amps	7.6	7.6	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-						
	HI PR	256	257	259	-	296	297	299	-	338	339	341	-	384	385	386	-	432	433	435	-	484	485	487	-	432	433	435	-	484	485	487	-	432	433	435	-	484	485	487	-						
LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	148	149	152	-	154	156	159	-	148	149	152	-	154	156	159	-	148	149	152	-	154	156	159	-							
<b>1350</b>	MBh	35.8	36.3	37.3	-	35.5	36.0	37.0	-	34.6	35.1	36.1	-	33.0	33.5	34.5	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-	31.1	31.6	32.6	-	29.4	29.9	30.9	-						
	S/T	0.68	0.61	0.48	-	0.69	0.61	0.48	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-	1.00	0.68	0.55	-	1.00	0.73	0.60	-						
	ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-	17	15	12	-	18	16	13	-	17	15	12	-	18	16	13	-						
	KW	2.11	2.11	2.11	-	2.35	2.34	2.34	-	2.61	2.60	2.60	-	2.89	2.89	2.88	-	3.20	3.20	3.20	-	3.57	3.57	3.56	-	3.20	3.20	3.20	-	3.57	3.57	3.56	-	3.20	3.20	3.20	-	3.57	3.57	3.56	-						
	Amps	7.7	7.7	7.6	-	8.7	8.7	8.7	-	9.9	9.9	9.9	-	11.2	11.2	11.2	-	12.7	12.6	12.6	-	14.3	14.3	14.3	-	12.7	12.6	12.6	-	14.3	14.3	14.3	-	12.7	12.6	12.6	-	14.3	14.3	14.3	-						
	HI PR	258	259	261	-	298	300	301	-	340	342	343	-	386	387	389	-	434	435	437	-	486	488	489	-	434	435	437	-	486	488	489	-	434	435	437	-	486	488	489	-						
LO PR	125	127	130	-	132	134	137	-	139	140	143	-	144	146	149	-	150	151	154	-	156	158	161	-	150	151	154	-	156	158	161	-	150	151	154	-	156	158	161	-							
<b>1050</b>	MBh	34.8	35.3	36.3	37.9	34.5	35.0	36.0	37.6	33.6	34.1	35.1	36.7	32.0	32.5	33.6	35.2	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5	30.1	30.6	31.7	33.2	28.4	28.9	29.9	31.5						
	S/T	0.72	0.64	0.51	0.37	0.72	0.65	0.52	0.38	1.00	0.67	0.54	0.40	1.00	0.69	0.56	0.42	1.00	0.71	0.58	0.44	1.00	0.76	0.63	0.49	1.00	0.71	0.58	0.44	1.00	0.76	0.63	0.49	1.00	0.71	0.58	0.44	1.00	0.76	0.63	0.49						
	ΔT	23	21	18	15	23	21	18	15	23	22	18	15	23	21	18	15	23	21	18	14	24	22	19	15	23	21	18	14	24	22	19	15	23	21	18	14	24	22	19	15						
	KW	2.09	2.09	2.08	2.10	2.32	2.32	2.33	2.33	2.58	2.58	2.58	2.59	2.86	2.86	2.86	2.88	3.18	3.18	3.17	3.19	3.55	3.54	3.54	3.56	3.18	3.18	3.17	3.19	3.55	3.54	3.54	3.56	3.18	3.18	3.17	3.19	3.55	3.54	3.54	3.56						
	Amps	7.6	7.6	7.5	8.0	8.6	8.6	8.6	8.7	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.2	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.3	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.3	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.3						
	HI PR	254	255	257	262	294	295	297	302	336	337	339	344	382	383	384	389	430	431	433	438	482	484	485	490	430	431	433	438	482	484	485	490	430	431	433	438	482	484	485	490						
LO PR	121	123	126	131	129	130	133	138	135	137	140	145	141	142	145	150	146	147	151	156	153	154	157	162	146	147	151	156	153	154	157	162	146	147	151	156	153	154	157	162							
<b>1200</b>	MBh	35.3	35.8	36.8	38.4	35.0	35.5	36.5	38.1	34.1	34.5	35.6	37.2	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0	30.6	31.1	32.1	33.7	28.8	29.3	30.4	32.0						
	S/T	0.78	0.70	0.57	0.43	0.78	0.71	0.58	0.44	1.00	0.73	0.60	0.46	1.00	0.75	0.62	0.48	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55	1.00	0.77	0.64	0.50	1.00	1.00	0.69	0.55						
	ΔT	22	20	17	14	22	20	17	13	22	20	17	14	22	20	17	13	22	20	17	13	23	21	18	14	22	20	17	13	23	21	18	14	22	20	17	13	23	21	18	14						
	KW	2.10	2.10	2.10	2.11	2.33	2.33	2.33	2.35	2.59	2.59	2.59	2.61	2.88	2.87	2.87	2.89	3.19	3.19	3.18	3.20	3.56	3.56	3.55	3.57	3.19	3.19	3.18	3.20	3.56	3.56	3.55	3.57	3.19	3.19	3.18	3.20	3.56	3.56	3.55	3.57						
	Amps	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.8	10.0	11.2	11.2	11.1	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0						
	HI PR	256	258	259	264	297	298	299	304	339	340	341	346	384	385	387	391	433	434	435	440	485	486	487	492	433	434	435	440	485	486	487	492	433	434	435	440	485	486	487	492						
LO PR	123	125	128	133	130	132	135	140	137	138	141	147	142	144	147	152	148	149	152	157	154	156	159	164	148	149	152	157	154	156	159	164	148	149	152	157	154	156	159	164							
<b>1350</b>	MBh	3																																													

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1050</b>	AIRFLOW	35.0	35.5	36.5	38.1	34.7	35.2	36.2	37.8	33.8	34.3	35.3	36.9	32.2	32.7	33.7	35.3	30.3	30.8	31.8	33.4	28.6	29.0	30.1	31.7
	MBh	0.84	0.77	0.63	0.5	1.00	0.77	0.64	0.50	1.00	0.80	0.66	0.5	1.00	0.82	0.68	0.54	1.00	1.00	0.70	0.6	1.00	1.00	0.75	0.61
	S/T	2.7	2.5	2.2	1.9	2.7	2.5	2.2	1.8	2.7	2.5	2.2	1.9	2.7	2.5	2.2	1.8	2.7	2.5	2.2	1.8	2.8	2.6	2.3	1.9
	ΔT	2.09	2.09	2.09	2.1	2.32	2.32	2.32	2.34	2.58	2.58	2.58	2.6	2.86	2.86	2.86	2.88	3.18	3.18	3.17	3.2	3.55	3.55	3.54	3.56
	KW	7.6	7.6	7.5	8.0	8.6	8.6	8.6	9.0	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.2	14.0
	Amps	255	256	258	262	295	296	298	302	337	338	340	344	382	383	385	389	431	432	434	438	483	484	486	490
	HI PR	122	123	126	132	129	131	134	139	136	137	140	145	141	143	146	151	146	148	151	156	153	155	158	163
	LO PR	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.3	34.2	34.7	35.8	37.4	32.7	33.2	34.2	35.8	30.8	31.2	32.3	33.9	29.0	29.5	30.5	32.1
	MBh	1.00	0.82	0.69	0.6	1.00	0.83	0.70	0.56	1.00	0.85	0.72	0.6	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.6	1.00	1.00	0.81	0.67
	S/T	2.6	2.4	2.1	1.7	2.6	2.4	2.1	1.7	2.6	2.4	2.1	1.8	2.6	2.4	2.1	1.7	2.6	2.4	2.1	1.7	2.7	2.5	2.2	1.8
ΔT	2.10	2.10	2.10	2.1	2.34	2.33	2.33	2.35	2.60	2.59	2.59	2.6	2.88	2.87	2.87	2.89	3.19	3.19	3.19	3.2	3.56	3.56	3.55	3.57	
KW	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.1	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	
Amps	257	258	260	264	297	298	300	304	339	340	342	346	384	385	387	392	433	434	436	440	485	486	488	492	
HI PR	124	125	128	133	131	132	136	141	137	139	142	147	143	144	147	153	148	150	153	158	155	156	160	165	
LO PR	36.0	36.5	37.5	39.1	35.7	36.2	37.2	38.8	34.8	35.3	36.3	37.9	33.2	33.7	34.7	36.3	31.3	31.8	32.8	34.4	29.6	30.1	31.1	32.7	
MBh	1.00	0.86	0.72	0.6	1.00	0.86	0.73	0.59	1.00	0.89	0.76	0.6	1.00	1.00	0.77	0.63	1.00	1.00	0.80	0.7	1.00	1.00	0.85	0.71	
S/T	2.5	2.3	2.0	1.7	2.5	2.3	2.0	1.7	2.5	2.4	2.0	1.7	2.5	2.3	2.0	1.6	2.5	2.3	2.0	1.6	2.6	2.4	2.1	1.7	
ΔT	2.11	2.11	2.11	2.1	2.35	2.34	2.34	2.36	2.61	2.60	2.60	2.6	2.89	2.89	2.88	2.90	3.20	3.20	3.20	3.2	3.57	3.57	3.56	4.00	
KW	7.7	7.7	7.6	8.0	9.0	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.1	11.0	12.7	12.6	12.6	13.0	14.3	14.3	14.3	14.0	
Amps	259	260	262	266	299	300	302	306	341	342	344	348	386	387	389	394	435	436	438	442	487	488	490	494	
HI PR	126	127	130	135	133	134	138	143	139	141	144	149	145	146	149	155	150	152	155	160	157	158	162	167	
LO PR																									

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1050</b>	AIRFLOW	35.6	36.1	37.1	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.8	33.3	34.3	35.9	30.9	31.4	32.4	34.0	29.1	29.6	30.7	32.3
	MBh	1.00	0.86	0.73	0.59	1.00	0.87	0.74	0.60	1.00	1.00	0.76	0.62	1.00	1.00	0.78	0.64	1.00	1.00	0.80	0.66	1.00	1.00	1.00	0.71
	S/T	3.1	2.9	2.5	2.2	3.0	2.9	2.5	2.2	3.1	2.9	2.6	2.2	3.0	2.9	2.5	2.2	3.0	2.8	2.5	2.2	3.1	3.0	2.6	2.3
	ΔT	2.10	2.09	2.09	2.11	2.33	2.33	2.32	2.34	2.59	2.59	2.58	2.60	2.87	2.87	2.86	2.88	3.18	3.18	3.18	3.20	3.55	3.55	3.55	3.56
	KW	7.6	7.6	7.6	8.0	8.7	8.6	8.6	9.0	9.8	9.8	9.8	10.0	11.1	11.1	11.1	11.0	12.6	12.6	12.5	13.0	14.3	14.2	14.2	14.0
	Amps	256	257	259	263	296	297	299	303	338	339	341	345	383	384	386	391	432	433	435	439	484	485	487	491
	HI PR	124	125	128	133	131	133	136	141	137	139	142	147	143	144	148	153	148	150	153	158	155	157	160	165
	LO PR	36.0	36.5	37.6	39.2	35.7	36.2	37.3	38.8	34.8	35.3	36.3	37.9	33.3	33.7	34.8	36.4	31.3	31.8	32.9	34.5	29.6	30.1	31.1	32.7
	MBh	1.00	0.92	0.79	0.65	1.00	0.93	0.80	0.66	1.00	1.00	0.82	0.68	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	1.00	0.77
	S/T	2.9	2.8	2.4	2.1	2.9	2.8	2.4	2.1	3.0	2.8	2.5	2.1	2.9	2.8	2.4	2.1	2.9	2.7	2.4	2.1	3.0	2.8	2.5	2.2
ΔT	2.11	2.11	2.10	2.12	2.34	2.34	2.33	2.35	2.60	2.60	2.59	2.61	2.88	2.88	2.88	2.89	3.20	3.19	3.19	3.21	3.56	3.56	3.56	3.58	
KW	7.6	7.6	7.6	8.0	8.7	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.6	12.6	12.6	13.0	14.3	14.3	14.3	14.0	
Amps	258	259	261	265	298	299	301	306	340	341	343	348	385	387	388	393	434	435	437	442	486	487	489	494	
HI PR	125	127	130	135	133	134	137	143	139	141	144	149	145	146	149	154	150	152	155	160	157	158	161	167	
LO PR	36.6	37.1	38.1	39.7	36.3	36.8	37.8	39.4	35.4	35.9	36.9	38.5	33.8	34.3	35.3	36.9	31.9	32.4	33.4	35.0	30.1	30.6	31.7	33.3	
MBh	1.00	0.96	0.82	0.68	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	0.89	0.76	1.00	1.00	1.00	0.81	
S/T	2.9	2.7	2.3	2.0	2.9	2.7	2.3	2.0	2.9	2.7	2.4	2.0	2.8	2.7	2.3	2.0	2.8	2.6	2.3	2.0	2.9	2.8	2.4	2.1	
ΔT	2.12	2.12	2.11	2.13	2.35	2.35	2.34	2.36	2.61	2.61	2.60	2.62	2.89	2.89	2.89	2.90	3.21	3.20	3.20	3.22	3.57	3.57	3.57	3.59	
KW	7.7	7.7	7.7	8.0	8.8	8.7	8.7	9.0	9.9	9.9	9.9	10.0	11.2	11.2	11.2	11.0	12.7	12.7	12.6	13.0	14.4	14.3	14.3	14.0	
Amps	260	261	263	268	300	301	303	308	342	343	345	350	388	389	390	395	436	437	439	444	488	489	491	496	
HI PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	151	156	152	154	157	162	159	160	163	169	
LO PR																									

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>70</b>	MBh	35.0	35.5	36.6	-	34.7	35.2	36.3	-	33.8	34.3	35.4	-	32.3	32.8	33.8	-	30.4	30.9	31.9	-	28.6	29.1	30.2	-
	S/T	0.66	0.59	0.45	-	0.67	0.59	0.46	-	0.70	0.62	0.48	-	0.71	0.64	0.50	-	1.00	0.66	0.53	-	1.00	0.71	0.58	-
	ΔT	2.0	18	14	-	2.0	18	14	-	2.0	18	14	-	1.9	18	14	-	1.9	17	14	-	2.0	19	15	-
	KW	2.03	2.03	2.02	-	2.26	2.26	2.26	-	2.53	2.53	2.52	-	2.81	2.81	2.81	-	3.13	3.13	3.13	-	3.51	3.50	3.50	-
	Amps	7.4	7.4	7.4	-	8.5	8.5	8.5	-	9.7	9.7	9.7	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-
	HI PR	255	256	258	-	295	296	298	-	337	338	340	-	382	383	385	-	430	431	433	-	482	483	485	-
	LO PR	122	123	126	-	129	130	134	-	135	137	140	-	141	142	145	-	146	148	151	-	153	154	157	-
	MBh	35.4	35.9	37.0	-	35.1	35.6	36.6	-	34.2	34.7	35.7	-	32.7	33.2	34.2	-	30.8	31.3	32.3	-	29.0	29.5	30.6	-
	S/T	0.69	0.62	0.48	-	0.70	0.62	0.49	-	0.72	0.65	0.51	-	0.74	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	19	17	13	-	20	18	14	-
KW	2.04	2.03	2.03	-	2.27	2.27	2.27	-	2.54	2.53	2.53	-	2.82	2.82	2.82	-	3.14	3.14	3.13	-	3.51	3.51	3.51	-	
Amps	7.5	7.5	7.5	-	8.6	8.6	8.5	-	9.8	9.8	9.7	-	11.1	11.1	11.0	-	12.5	12.5	12.5	-	14.2	14.2	14.2	-	
HI PR	257	258	259	-	296	298	299	-	338	339	341	-	383	384	386	-	432	433	435	-	484	485	486	-	
LO PR	123	125	128	-	130	132	135	-	137	138	141	-	142	144	147	-	147	149	152	-	154	156	159	-	
MBh	36.1	36.6	37.6	-	35.8	36.3	37.3	-	34.9	35.4	36.4	-	33.4	33.8	34.9	-	31.5	31.9	33.0	-	29.7	30.2	31.2	-	
S/T	0.71	0.63	0.50	-	0.71	0.64	0.50	-	0.74	0.66	0.53	-	1.00	0.68	0.55	-	1.00	0.71	0.57	-	1.00	0.76	0.62	-	
ΔT	18	16	12	-	18	16	12	-	18	16	13	-	18	16	12	-	18	16	12	-	19	17	13	-	
KW	2.05	2.04	2.04	-	2.28	2.28	2.28	-	2.55	2.54	2.54	-	2.83	2.83	2.83	-	3.15	3.15	3.14	-	3.52	3.52	3.52	-	
Amps	7.5	7.5	7.5	-	8.6	8.6	8.6	-	9.8	9.8	9.8	-	11.1	11.1	11.1	-	12.6	12.6	12.6	-	14.3	14.3	14.3	-	
HI PR	259	260	262	-	299	300	302	-	341	342	343	-	386	387	388	-	434	435	437	-	486	487	489	-	
LO PR	125	127	130	-	133	134	137	-	139	141	144	-	145	146	149	-	150	151	154	-	156	158	161	-	
<b>75</b>	MBh	35.1	35.6	36.6	38.2	34.8	35.2	36.3	37.9	33.9	34.3	35.4	37.0	32.3	<b>32.8</b>	33.8	35.4	30.4	30.9	31.9	33.5	28.7	29.2	30.2	31.8
	S/T	0.79	0.72	0.58	0.44	0.80	0.72	0.59	0.45	1.00	0.75	0.61	0.47	1.00	<b>0.77</b>	0.63	0.49	1.00	0.79	0.65	0.51	1.00	0.84	0.71	0.56
	ΔT	24	22	18	15	24	22	18	15	24	22	18	15	24	<b>22</b>	18	14	23	22	18	14	25	23	19	15
	KW	2.03	2.02	2.02	2.04	2.26	2.26	2.26	2.28	2.53	2.52	2.52	2.54	2.81	<b>2.81</b>	2.81	2.82	3.13	3.13	3.12	3.14	3.50	3.50	3.50	3.52
	Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	<b>11.0</b>	11.0	11.1	12.5	12.5	12.5	12.5	14.2	14.2	14.2	14.3
	HI PR	255	256	258	263	295	296	298	302	337	338	340	344	382	<b>383</b>	385	389	430	432	433	438	482	483	485	490
	LO PR	122	123	126	131	129	130	134	139	135	137	140	145	141	<b>142</b>	145	150	146	148	151	156	153	154	157	162
	MBh	35.5	35.9	37.0	38.6	35.1	35.6	36.7	38.2	34.2	34.7	35.8	37.3	32.7	<b>33.2</b>	34.2	35.8	30.8	31.3	32.3	33.9	29.1	29.5	30.6	32.2
	S/T	0.82	0.74	0.61	0.47	0.83	0.75	0.61	0.47	1.00	0.77	0.64	0.50	1.00	<b>0.79</b>	0.66	0.52	1.00	0.82	0.68	0.54	1.00	1.00	0.73	0.59
	ΔT	23	21	18	14	23	21	17	14	23	21	18	14	23	<b>21</b>	17	14	23	21	17	14	24	22	18	15
KW	2.03	2.03	2.03	2.05	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.55	2.82	<b>2.82</b>	2.81	2.83	3.14	3.14	3.13	3.15	3.51	3.51	3.51	3.52	
Amps	7.5	7.5	7.4	7.5	8.6	8.5	8.5	8.6	9.8	9.8	9.7	9.8	11.1	<b>11.1</b>	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3	
HI PR	257	258	260	264	297	298	300	304	338	340	341	346	383	<b>385</b>	386	391	432	433	435	439	484	485	487	491	
LO PR	123	125	128	133	130	132	135	140	137	138	141	146	142	<b>144</b>	147	152	147	149	152	157	154	156	159	164	
MBh	36.1	36.6	37.7	39.2	35.8	36.3	37.4	38.9	34.9	35.4	36.4	38.0	33.4	<b>33.9</b>	34.9	36.5	31.5	32.0	33.0	34.6	29.7	30.2	31.3	32.8	
S/T	0.84	0.76	0.63	0.48	0.84	0.77	0.63	0.49	1.00	0.79	0.66	0.51	1.00	<b>0.81</b>	0.68	0.53	1.00	0.83	0.70	0.56	1.00	1.00	0.75	0.61	
ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	<b>20</b>	17	13	22	20	16	13	23	21	17	14	
KW	2.04	2.04	2.04	2.06	2.28	2.28	2.27	2.29	2.54	2.54	2.54	2.56	2.83	<b>2.83</b>	2.82	2.84	3.15	3.15	3.14	3.16	3.52	3.52	3.52	3.53	
Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	<b>11.1</b>	11.1	11.2	12.6	12.6	12.5	12.6	14.3	14.3	14.3	14.3	
HI PR	259	260	262	266	299	300	302	306	341	342	344	348	386	<b>387</b>	389	393	434	435	437	442	486	487	489	493	
LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	<b>146</b>	149	154	150	151	154	159	156	158	161	166	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1100</b>	MBh	35.2	35.7	36.8	38.3	34.9	35.4	36.5	38.0	34.0	34.5	35.6	37.1	32.5	33.0	34.0	35.6	30.6	31.1	32.1	33.7	28.8	29.3	30.4	31.9
	S/T	0.92	0.84	0.71	0.6	1.00	0.85	0.71	0.57	1.00	0.87	0.74	0.6	1.00	0.89	0.76	0.61	1.00	1.00	0.78	0.6	1.00	1.00	0.83	0.69
	ΔT	28	26	23	19	28	26	22	19	28	26	23	19	28	26	22	19	28	26	22	18	29	27	23	20
	KW	2.03	2.03	2.02	2.0	2.26	2.26	2.26	2.28	2.53	2.53	2.52	2.5	2.81	2.81	2.81	2.83	3.13	3.13	3.13	3.1	3.51	3.50	3.50	3.52
	Amps	7.4	7.4	7.4	7.5	8.5	8.5	8.5	8.6	9.7	9.7	9.7	9.8	11.0	11.0	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3
	HI PR	256	257	259	263	296	297	298	303	337	339	340	345	382	384	385	390	431	432	434	438	483	484	486	490
LO PR	122	124	127	132	130	131	134	139	136	137	140	146	141	143	146	151	147	148	151	156	153	155	158	163	
<b>80</b>	MBh	35.6	36.1	37.2	38.7	35.3	35.8	36.8	38.4	34.4	34.9	35.9	37.5	32.9	33.4	34.4	36.0	31.0	31.5	32.5	34.1	29.2	29.7	30.8	32.3
	S/T	1.00	0.87	0.73	0.6	1.00	0.87	0.74	0.60	1.00	0.90	0.76	0.6	1.00	0.92	0.78	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72
	ΔT	27	25	22	18	27	25	22	18	27	26	22	18	27	25	22	18	27	25	21	18	28	26	23	19
	KW	2.04	2.03	2.03	2.1	2.27	2.27	2.27	2.28	2.54	2.53	2.53	2.6	2.82	2.82	2.81	2.83	3.14	3.14	3.13	3.2	3.51	3.51	3.51	3.53
	Amps	7.5	7.5	7.5	7.5	8.6	8.6	8.5	8.6	9.8	9.8	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3
	HI PR	257	258	260	265	297	298	298	300	339	340	342	346	384	385	387	391	432	434	435	440	484	485	487	492
LO PR	124	125	128	133	131	132	135	141	137	139	142	147	143	144	147	152	148	150	153	158	155	156	159	164	
<b>1350</b>	MBh	36.3	36.8	37.8	39.4	36.0	36.5	37.5	39.1	35.1	35.6	36.6	38.2	33.6	34.0	35.1	36.7	31.7	32.1	33.2	34.8	29.9	30.4	31.4	33.0
	S/T	1.00	0.89	0.75	0.6	1.00	0.89	0.76	0.61	1.00	0.92	0.78	0.6	1.00	1.00	0.80	0.66	1.00	1.00	0.82	0.7	1.00	1.00	0.88	0.73
	ΔT	26	24	21	17	26	24	21	17	27	25	21	17	26	24	21	17	26	24	20	17	27	25	22	18
	KW	2.05	2.04	2.04	2.1	2.28	2.28	2.28	2.29	2.55	2.54	2.54	2.6	2.83	2.83	2.83	2.84	3.15	3.15	3.14	3.2	3.52	3.52	3.52	3.54
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.6	14.3	14.3	14.3	14.3
	HI PR	260	261	262	267	299	301	302	307	341	342	344	349	386	387	389	394	435	436	438	442	487	488	489	494
LO PR	126	127	131	136	133	135	138	143	140	141	144	149	145	147	150	155	150	152	155	160	157	159	162	167	

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1100</b>	MBh	35.8	36.3	37.3	38.9	35.5	36.0	37.0	38.6	34.6	35.1	36.1	37.7	33.1	33.5	34.6	36.2	31.2	31.7	32.7	34.3	29.4	29.9	30.9	32.5
	S/T	1.00	0.94	0.81	0.67	1.00	0.95	0.81	0.67	1.00	1.00	0.84	0.70	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	1.00	0.79
	ΔT	32	30	26	23	32	30	26	23	32	30	26	23	32	30	26	22	31	30	26	22	33	31	27	23
	KW	2.03	2.03	2.03	2.04	2.27	2.27	2.26	2.28	2.53	2.53	2.53	2.54	2.82	2.82	2.81	2.83	3.14	3.13	3.13	3.15	3.51	3.51	3.50	3.52
	Amps	7.5	7.5	7.4	7.5	8.5	8.5	8.5	8.6	9.8	9.7	9.7	9.8	11.1	11.1	11.0	11.1	12.5	12.5	12.5	12.6	14.2	14.2	14.2	14.3
	HI PR	257	258	260	264	297	298	300	304	339	340	341	346	384	385	386	391	432	433	435	439	484	485	487	491
LO PR	124	126	129	134	131	133	136	141	138	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	
<b>1200</b>	MBh	36.2	36.7	37.7	39.3	35.9	36.4	37.4	39.0	35.0	35.5	36.5	38.1	33.4	33.9	35.0	36.5	31.5	32.0	33.1	34.6	29.8	30.3	31.3	32.9
	S/T	1.00	0.97	0.83	0.69	1.00	0.98	0.84	0.70	1.00	1.00	0.87	0.72	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	1.00	0.82
	ΔT	31	29	26	22	31	29	25	22	31	29	26	22	31	29	25	22	31	29	25	22	32	30	26	23
	KW	2.04	2.04	2.03	2.05	2.28	2.27	2.27	2.29	2.54	2.54	2.53	2.55	2.83	2.82	2.82	2.84	3.14	3.14	3.14	3.16	3.52	3.52	3.51	3.53
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.6	9.8	9.8	9.8	9.8	11.1	11.1	11.1	11.2	12.6	12.5	12.5	12.6	14.3	14.3	14.2	14.3
	HI PR	258	260	261	266	298	299	301	306	340	341	343	347	385	386	388	392	434	435	437	441	485	487	488	493
LO PR	125	127	130	135	133	134	137	142	139	141	144	149	145	146	149	154	150	151	154	159	156	158	161	166	
<b>1350</b>	MBh	36.9	37.4	38.4	40.0	36.6	37.1	38.1	39.7	35.7	36.2	37.2	38.8	34.1	34.6	35.7	37.2	32.2	32.7	33.8	35.3	30.5	31.0	32.0	33.6
	S/T	1.00	0.99	0.85	0.71	1.00	1.00	0.86	0.72	1.00	1.00	0.88	0.74	1.00	1.00	0.90	0.76	1.00	1.00	0.92	0.78	1.00	1.00	1.00	0.83
	ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	25	22
	KW	2.05	2.05	2.04	2.06	2.29	2.28	2.28	2.30	2.55	2.55	2.54	2.56	2.84	2.83	2.83	2.85	3.15	3.15	3.15	3.17	3.53	3.53	3.52	3.54
	Amps	7.5	7.5	7.5	7.6	8.6	8.6	8.6	8.7	9.8	9.8	9.8	9.9	11.1	11.1	11.1	11.2	12.6	12.6	12.6	12.7	14.3	14.3	14.3	14.4
	HI PR	261	262	264	268	301	302	304	308	342	344	345	350	387	389	390	395	436	437	439	443	488	489	491	495
LO PR	128	129	132	137	135	137	140	145	141	143	146	151	147	148	151	157	152	154	157	162	159	160	163	168	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																													
		65					75					85					95					105					115				
		59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75	59	63	67	71	75
<b>70</b>	MBh	39.7	40.2	41.4	-	39.3	39.9	41.1	-	38.3	38.8	40.0	-	36.5	37.1	38.2	-	34.3	34.9	36.1	-	32.3	32.9	34.1	-						
	S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-						
	ΔT	2.0	18	15	-	2.0	18	15	-	2.0	18	15	-	2.0	18	15	-	2.0	18	14	-	2.1	19	15	-						
	KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-						
	Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	16.0	-						
	HI PR	264	266	267	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-						
	LO PR	126	128	131	-	134	135	139	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-						
	MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-						
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-						
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-						
KW	2.34	2.33	2.33	-	2.60	2.60	2.60	-	2.90	2.90	2.90	-	3.23	3.23	3.22	-	3.59	3.59	3.58	-	4.02	4.01	4.01	-							
Amps	8.4	8.3	8.3	-	9.6	9.6	9.6	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-	14.1	14.1	14.1	-	16.0	16.0	16.0	-							
HI PR	267	268	270	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-							
LO PR	128	130	133	-	136	137	140	-	142	144	147	-	148	150	153	-	154	155	158	-	161	162	165	-							
MBh	40.8	41.4	42.6	-	40.5	41.0	42.2	-	39.4	40.0	41.2	-	37.7	38.2	39.4	-	35.5	36.0	37.2	-	33.5	34.0	35.2	-							
S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-							
ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-							
KW	2.35	2.34	2.34	-	2.62	2.61	2.61	-	2.92	2.91	2.91	-	3.24	3.24	3.23	-	3.60	3.60	3.60	-	4.03	4.03	4.02	-							
Amps	8.4	8.4	8.4	-	9.6	9.6	9.6	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.1	14.1	-	16.1	16.1	16.1	-							
HI PR	269	270	272	-	311	312	314	-	354	355	357	-	401	402	404	-	452	453	455	-	506	507	509	-							
LO PR	130	132	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	157	160	-	163	164	167	-							
<b>75</b>	MBh	39.7	40.3	41.4	43.3	39.3	39.9	41.1	42.9	38.3	38.9	40.1	41.9	36.5	<b>37.1</b>	38.3	40.1	34.3	34.9	36.1	37.9	32.4	32.9	34.1	35.9						
	S/T	0.77	0.69	0.55	0.40	1.00	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	<b>0.74</b>	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53						
	ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	<b>22</b>	19	15	24	22	18	15	25	23	19	16						
	KW	2.32	2.32	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.90	3.21	<b>3.21</b>	3.21	3.23	3.58	3.57	3.57	3.59	4.00	4.00	4.00	4.01						
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	9.6	10.9	10.9	10.9	11.0	12.4	<b>12.4</b>	12.3	12.4	14.0	14.0	14.0	14.0	16.0	16.0	16.0	16.0						
	HI PR	265	266	268	272	306	307	309	314	350	351	353	358	397	<b>398</b>	400	405	448	449	451	455	502	503	505	510						
	LO PR	126	128	131	136	134	135	139	144	141	142	145	151	146	<b>148</b>	151	156	152	153	157	162	159	160	164	169						
	MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	<b>37.6</b>	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4						
	S/T	0.83	0.75	0.61	0.46	1.00	0.76	0.61	0.47	1.00	0.78	0.64	0.49	1.00	<b>0.80</b>	0.66	0.51	1.00	1.00	0.68	0.53	1.00	1.00	0.74	0.59						
	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	<b>21</b>	17	14	22	21	17	14	24	22	18	15						
KW	2.33	2.33	2.33	2.35	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.92	3.23	<b>3.22</b>	3.22	3.24	3.59	3.59	3.58	3.60	4.01	4.01	4.01	4.03							
Amps	8.3	8.3	8.3	8.0	9.6	9.6	9.5	10.0	10.9	10.9	10.9	11.0	12.4	<b>12.4</b>	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1							
HI PR	267	268	270	274	309	310	312	316	352	353	355	360	399	<b>400</b>	402	407	450	451	453	458	504	505	507	512							
LO PR	128	130	133	138	136	137	140	146	142	144	147	153	148	<b>150</b>	153	158	154	155	158	164	161	162	165	171							
MBh	40.8	41.4	42.6	44.4	40.5	41.1	42.2	44.0	39.5	40.0	41.2	43.0	37.7	<b>38.2</b>	39.4	41.2	35.5	36.1	37.2	39.1	33.5	34.1	35.3	37.1							
S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	<b>0.84</b>	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.77	0.62							
ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	<b>20</b>	16	13	21	20	16	13	23	21	17	14							
KW	2.35	2.34	2.34	2.36	2.61	2.61	2.61	2.63	2.91	2.91	2.91	2.93	3.24	<b>3.24</b>	3.23	3.25	3.60	3.60	3.59	3.61	4.03	4.02	4.02	4.04							
Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	<b>12.5</b>	12.5	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.1	16.2							
HI PR	269	270	272	277	311	312	314	318	354	356	357	362	402	<b>403</b>	405	409	452	453	455	460	506	508	509	514							
LO PR	130	132	135	140	138	139	142	148	144	146	149	155	150	<b>152</b>	155	160	156	157	160	166	163	164	167	173							

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1225</b>	MBh	39.9	40.5	41.7	43.5	39.6	40.1	41.3	43.1	38.5	39.1	40.3	42.1	36.7	37.3	38.5	40.3	34.6	35.1	36.3	38.1	32.6	33.1	34.3	36.1
	S/T	1.00	0.82	0.68	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.81	0.66
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20
	KW	2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.9	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.6	4.00	4.00	4.00	4.02
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.0	14.0	14.0	14.0	14.0	16.0	16.0	16.0	16.0
	HI PR	265	266	268	273	307	308	310	314	351	352	354	358	398	399	401	405	448	449	451	456	502	504	505	510
	LO PR	127	128	131	137	134	136	139	144	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169
	MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	<b>39.0</b>	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6
	S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.74	0.60	1.00	0.91	0.77	0.6	1.00	1.00	<b>0.79</b>	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.72
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	<b>21</b>	18	26	25	21	18	28	26	22	19
<b>1400</b>	KW	2.33	2.33	2.33	2.4	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.9	3.23	3.23	<b>3.22</b>	3.24	3.59	3.59	3.58	3.6	4.02	4.01	4.01	4.03
	Amps	8.4	8.3	8.3	8.0	9.6	9.6	9.6	10.0	11.0	10.9	10.9	11.0	12.4	12.4	<b>12.4</b>	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1
	HI PR	267	268	270	275	309	310	312	317	353	354	356	360	400	401	<b>403</b>	407	451	452	454	458	505	506	508	512
	LO PR	129	130	133	139	136	138	141	146	143	144	148	153	149	150	<b>153</b>	159	154	156	159	164	161	163	166	171
	MBh	41.1	41.6	42.8	44.6	40.7	41.3	42.4	44.3	39.7	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.3	37.4	39.3	33.7	34.3	35.5	37.3
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.75
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18
	KW	2.35	2.34	2.34	2.4	2.62	2.61	2.61	2.63	2.92	2.91	2.91	2.9	3.24	3.24	3.23	3.25	3.60	3.60	3.60	3.6	4.03	4.03	4.02	4.00
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.1	14.1	14.0	16.1	16.1	16.1	16.2
	HI PR	270	271	273	277	311	312	314	319	355	356	358	363	402	403	405	410	453	454	456	460	507	508	510	514
LO PR	131	132	135	141	138	140	143	148	145	147	150	155	151	152	155	161	156	158	161	166	163	165	168	173	

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1225</b>	MBh	40.6	41.1	42.3	44.1	40.2	40.8	42.0	43.8	39.2	39.7	40.9	42.7	37.4	38.0	39.1	41.0	35.2	35.8	37.0	38.8	33.2	33.8	35.0	36.8
	S/T	1.00	0.92	0.78	0.63	1.00	1.00	0.79	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	1.00	0.71	1.00	1.00	1.00	0.76
	ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	29	26	22	32	30	27	24
	KW	2.33	2.32	2.32	2.34	2.59	2.59	2.59	2.61	2.89	2.89	2.89	2.91	3.22	3.22	3.21	3.23	3.58	3.58	3.58	3.60	4.01	4.01	4.00	4.02
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.0	14.0	14.0	16.0	16.0	16.0	16.1
	HI PR	266	267	269	274	308	309	311	316	352	353	355	359	399	400	402	406	450	451	453	457	504	505	507	511
	LO PR	129	130	133	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171
	MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3
	S/T	1.00	0.99	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	1.00	0.77	1.00	1.00	1.00	0.82
	ΔT	30	29	25	22	30	28	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22
<b>1400</b>	KW	2.34	2.34	2.33	2.35	2.61	2.61	2.60	2.62	2.91	2.91	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.59	3.59	3.61	4.02	4.02	4.01	4.04
	Amps	8.4	8.4	8.3	8.0	9.6	9.6	9.6	10.0	11.0	11.0	10.9	11.0	12.5	12.5	12.4	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.0	16.1
	HI PR	269	270	272	276	310	311	313	318	354	355	357	362	401	402	404	409	452	453	455	459	506	507	509	514
	LO PR	130	132	135	141	138	140	143	148	145	146	150	155	150	152	155	161	156	158	161	166	163	165	168	173
	MBh	41.7	42.3	43.5	45.3	41.4	41.9	43.1	44.9	40.3	40.9	42.1	43.9	38.5	39.1	40.3	42.1	36.4	36.9	38.1	39.9	34.4	34.9	36.1	37.9
	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	1.00	0.81	1.00	1.00	1.00	0.86
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	21
	KW	2.35	2.35	2.34	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.91	2.93	3.24	3.24	3.24	3.26	3.61	3.61	3.60	3.62	4.03	4.03	4.03	4.05
	Amps	8.4	8.4	8.4	8.0	9.7	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.1	14.0	16.1	16.1	16.1	16.2
	HI PR	271	272	274	278	312	314	315	320	356	357	359	364	403	404	406	411	454	455	457	462	508	509	511	516
LO PR	132	134	137	143	140	142	145	150	147	148	152	157	153	154	157	163	158	160	163	168	165	167	170	175	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



IDB		OUTDOOR AMBIENT TEMPERATURE																								
		65				75				85				95				105				115				
		AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1225</b>	MBh	39.7	40.2	41.4	-	39.3	39.9	41.1	-	38.3	38.8	40.0	-	36.5	37.1	38.2	-	34.3	34.9	36.1	-	32.3	32.9	34.1	-	
	S/T	0.63	0.55	0.41	-	0.64	0.56	0.42	-	0.66	0.58	0.44	-	1.00	0.60	0.46	-	1.00	0.63	0.49	-	1.00	0.68	0.54	-	
	ΔT	20	18	15	-	20	18	15	-	20	18	15	-	20	18	15	-	20	18	14	-	21	19	15	-	
	KW	2.32	2.32	2.31	-	2.59	2.59	2.58	-	2.89	2.89	2.88	-	3.21	3.21	3.21	-	3.58	3.57	3.57	-	4.00	4.00	4.00	-	
	Amps	8.3	8.3	8.3	-	9.5	9.5	9.5	-	10.9	10.9	10.9	-	12.4	12.4	12.3	-	14.0	14.0	14.0	-	16.0	16.0	16.0	-	
<b>1400</b>	HI PR	264	266	267	-	306	307	309	-	350	351	353	-	397	398	400	-	448	449	451	-	502	503	505	-	
	LO PR	126	128	131	-	134	135	139	-	140	142	145	-	146	148	151	-	152	153	157	-	159	160	163	-	
	MBh	40.2	40.8	41.9	-	39.8	40.4	41.6	-	38.8	39.4	40.6	-	37.0	37.6	38.8	-	34.8	35.4	36.6	-	32.9	33.4	34.6	-	
	S/T	0.69	0.61	0.47	-	0.70	0.62	0.48	-	0.73	0.65	0.51	-	1.00	0.67	0.53	-	1.00	0.69	0.55	-	1.00	0.74	0.60	-	
	ΔT	19	17	13	-	19	17	13	-	19	17	14	-	19	17	13	-	18	17	13	-	20	18	14	-	
<b>1575</b>	KW	2.34	2.33	2.33	-	2.60	2.60	2.60	-	2.90	2.90	2.90	-	3.23	3.23	3.22	-	3.59	3.59	3.58	-	4.02	4.01	4.01	-	
	Amps	8.4	8.3	8.3	-	9.6	9.6	9.6	-	11.0	10.9	10.9	-	12.4	12.4	12.4	-	14.1	14.1	14.1	-	16.0	16.0	16.0	-	
	HI PR	267	268	270	-	308	309	311	-	352	353	355	-	399	400	402	-	450	451	453	-	504	505	507	-	
	LO PR	128	130	133	-	136	137	140	-	142	144	147	-	148	150	153	-	154	155	158	-	161	162	165	-	
	MBh	40.8	41.4	42.6	-	40.5	41.0	42.2	-	39.4	40.0	41.2	-	37.7	38.2	39.4	-	35.5	36.0	37.2	-	33.5	34.0	35.2	-	
<b>1225</b>	S/T	0.73	0.65	0.51	-	0.74	0.66	0.52	-	1.00	0.68	0.54	-	1.00	0.70	0.56	-	1.00	0.73	0.58	-	1.00	1.00	0.64	-	
	ΔT	18	16	13	-	18	16	12	-	18	16	13	-	18	16	12	-	17	16	12	-	19	17	13	-	
	KW	2.35	2.34	2.34	-	2.62	2.61	2.61	-	2.92	2.91	2.91	-	3.24	3.24	3.23	-	3.60	3.60	3.60	-	4.03	4.03	4.02	-	
	Amps	8.4	8.4	8.4	-	9.6	9.6	9.6	-	11.0	11.0	11.0	-	12.5	12.5	12.5	-	14.2	14.1	14.1	-	16.1	16.1	16.1	-	
	HI PR	269	270	272	-	311	312	314	-	354	355	357	-	401	402	404	-	452	453	455	-	506	507	509	-	
<b>1400</b>	LO PR	130	132	135	-	138	139	142	-	144	146	149	-	150	152	155	-	156	157	160	-	163	164	167	-	
	MBh	39.7	40.3	41.4	43.3	39.3	39.9	41.1	42.9	38.3	38.9	40.1	41.9	36.5	<b>37.1</b>	38.3	40.1	34.3	34.9	36.1	37.9	32.4	32.9	34.1	35.9	
	S/T	0.77	0.69	0.55	0.40	1.00	0.69	0.55	0.40	1.00	0.72	0.58	0.43	1.00	<b>0.74</b>	0.60	0.45	1.00	0.76	0.62	0.47	1.00	1.00	0.67	0.53	
	ΔT	24	22	19	15	24	22	19	15	24	22	19	15	24	<b>22</b>	19	15	24	22	18	15	25	23	19	16	
	KW	2.32	2.32	2.31	2.33	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.90	3.21	<b>3.21</b>	3.21	3.23	3.58	3.57	3.57	3.59	4.00	4.00	4.00	3.99	4.01
<b>1575</b>	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	9.6	10.9	10.9	11.0	11.0	12.4	<b>12.4</b>	12.3	12.4	14.0	14.0	14.0	14.0	16.0	16.0	16.0	15.9	16.0
	HI PR	265	266	268	272	306	307	309	314	350	351	353	358	397	<b>398</b>	400	405	448	449	451	455	502	503	505	510	
	LO PR	126	128	131	136	134	135	139	144	141	142	145	151	146	<b>148</b>	151	156	152	153	157	162	159	160	164	169	
	MBh	40.2	40.8	42.0	43.8	39.9	40.4	41.6	43.4	38.8	39.4	40.6	42.4	37.0	<b>37.6</b>	38.8	40.6	34.9	35.4	36.6	38.4	32.9	33.4	34.6	36.4	
	S/T	0.83	0.75	0.61	0.46	1.00	0.76	0.61	0.47	1.00	0.78	0.64	0.49	1.00	<b>0.80</b>	0.66	0.51	1.00	1.00	0.68	0.53	1.00	1.00	0.74	0.59	
<b>1400</b>	ΔT	23	21	17	14	23	21	17	14	23	21	18	14	23	<b>21</b>	17	14	22	21	17	14	24	22	18	15	
	KW	2.33	2.33	2.33	2.35	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.92	3.23	<b>3.22</b>	3.22	3.24	3.59	3.59	3.58	3.60	4.01	4.01	4.01	4.03	
	Amps	8.3	8.3	8.3	8.0	9.6	9.6	9.5	10.0	10.9	10.9	11.0	11.0	12.4	<b>12.4</b>	12.4	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1	
	HI PR	267	268	270	274	309	310	312	316	352	353	355	360	399	<b>400</b>	402	407	450	451	453	458	504	505	507	512	
	LO PR	128	130	133	138	136	137	140	146	142	144	147	153	148	<b>150</b>	153	158	154	155	158	164	161	162	165	171	
<b>1575</b>	MBh	40.8	41.4	42.6	44.4	40.5	41.1	42.2	44.0	39.5	40.0	41.2	43.0	37.7	<b>38.2</b>	39.4	41.2	35.5	36.1	37.2	39.1	33.5	34.1	35.3	37.1	
	S/T	0.86	0.78	0.64	0.49	1.00	0.79	0.65	0.50	1.00	0.82	0.68	0.53	1.00	<b>0.84</b>	0.70	0.55	1.00	1.00	0.72	0.57	1.00	1.00	0.77	0.62	
	ΔT	22	20	17	13	22	20	17	13	22	20	17	13	22	<b>20</b>	16	13	21	20	16	13	23	21	17	14	
	KW	2.35	2.34	2.34	2.36	2.61	2.61	2.61	2.63	2.91	2.91	2.91	2.93	3.24	<b>3.24</b>	3.23	3.25	3.60	3.60	3.59	3.61	4.03	4.02	4.02	4.04	
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	<b>12.5</b>	12.5	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.1	16.2	
<b>1225</b>	HI PR	269	270	272	277	311	312	314	318	354	356	357	362	402	<b>403</b>	405	409	452	453	455	460	506	508	509	514	
	LO PR	130	132	135	140	138	139	142	148	144	146	149	155	150	<b>152</b>	155	160	156	157	160	166	163	164	167	173	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
<b>1225</b>	MBh	39.9	40.5	41.7	43.5	39.6	40.1	41.3	43.1	38.5	39.1	40.3	42.1	36.7	37.3	38.5	40.3	34.6	35.1	36.3	38.1	32.6	33.1	34.3	36.1												
	S/T	1.00	0.82	0.68	0.5	1.00	0.82	0.68	0.53	1.00	0.85	0.71	0.6	1.00	1.00	0.73	0.58	1.00	1.00	0.75	0.6	1.00	1.00	0.81	0.66												
	ΔT	28	26	23	19	28	26	23	19	28	26	23	19	28	26	23	19	28	26	22	19	29	27	23	20												
	KW	2.32	2.32	2.31	2.3	2.59	2.59	2.58	2.60	2.89	2.89	2.88	2.9	3.21	3.21	3.21	3.23	3.58	3.57	3.57	3.6	4.00	4.00	4.00	4.02												
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.3	12.0	14.0	14.0	14.0	14.0	16.0	16.0	16.0	16.0												
	HI PR	265	266	268	273	307	308	310	314	351	352	354	358	398	399	401	405	448	449	451	456	502	504	505	510												
	LO PR	127	128	131	137	134	136	139	144	141	143	146	151	147	148	152	157	152	154	157	162	159	161	164	169												
<b>80</b>	MBh	40.4	41.0	42.2	44.0	40.1	40.6	41.8	43.6	39.0	39.6	40.8	42.6	37.3	37.8	<b>39.0</b>	40.8	35.1	35.6	36.8	38.6	33.1	33.6	34.8	36.6												
	S/T	1.00	0.88	0.74	0.6	1.00	0.89	0.74	0.60	1.00	0.91	0.77	0.6	1.00	1.00	<b>0.79</b>	0.64	1.00	1.00	0.81	0.7	1.00	1.00	0.87	0.72												
	ΔT	27	25	22	18	27	25	21	18	27	25	22	18	27	25	<b>21</b>	18	26	25	21	18	28	26	22	19												
	KW	2.33	2.33	2.33	2.4	2.60	2.60	2.60	2.62	2.90	2.90	2.90	2.9	3.23	3.23	<b>3.22</b>	3.24	3.59	3.59	3.58	3.6	4.02	4.01	4.01	4.03												
	Amps	8.4	8.3	8.3	8.0	9.6	9.6	9.6	10.0	11.0	10.9	10.9	11.0	12.4	12.4	<b>12.4</b>	12.0	14.1	14.1	14.1	14.0	16.0	16.0	16.0	16.1												
	HI PR	267	268	270	275	309	310	312	317	353	354	356	360	400	401	<b>403</b>	407	451	452	454	458	505	506	508	512												
	LO PR	129	130	133	139	136	138	141	146	143	144	148	153	149	150	<b>153</b>	159	154	156	159	164	161	163	166	171												
<b>1575</b>	MBh	41.1	41.6	42.8	44.6	40.7	41.3	42.4	44.3	39.7	40.2	41.4	43.2	37.9	38.4	39.6	41.4	35.7	36.3	37.4	39.3	33.7	34.3	35.5	37.3												
	S/T	1.00	0.91	0.77	0.6	1.00	0.92	0.78	0.63	1.00	1.00	0.81	0.7	1.00	1.00	0.83	0.68	1.00	1.00	0.85	0.7	1.00	1.00	1.00	0.75												
	ΔT	26	24	21	17	26	24	21	17	26	24	21	17	26	24	21	17	26	24	20	17	27	25	21	18												
	KW	2.35	2.34	2.34	2.4	2.62	2.61	2.61	2.63	2.92	2.91	2.91	2.9	3.24	3.24	3.23	3.25	3.60	3.60	3.60	3.6	4.03	4.03	4.02	4.00												
	Amps	8.4	8.4	8.4	8.0	9.6	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.1	14.1	14.0	16.1	16.1	16.1	16.2												
	HI PR	270	271	273	277	311	312	314	319	355	356	358	363	402	403	405	410	453	454	456	460	507	508	510	514												
	LO PR	131	132	135	141	138	140	143	148	145	147	150	155	151	152	155	161	156	158	161	166	163	165	168	173												

IDB	AIRFLOW	OUTDOOR AMBIENT TEMPERATURE																																			
		65						75						85						95						105						115					
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
<b>1225</b>	MBh	40.6	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3											
	S/T	1.00	0.92	0.78	0.63	1.00	0.92	0.79	0.64	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.75	0.71	1.00	1.00	1.00	0.82												
	ΔT	31	30	26	23	31	30	26	23	32	30	26	23	31	30	26	23	31	30	26	22	32	30	27	24												
	KW	2.33	2.32	2.32	2.34	2.59	2.59	2.59	2.61	2.89	2.89	2.89	2.91	3.22	3.22	3.21	3.23	3.58	3.58	3.58	3.60	4.01	4.01	4.00	4.02												
	Amps	8.3	8.3	8.3	8.0	9.5	9.5	9.5	10.0	10.9	10.9	10.9	11.0	12.4	12.4	12.4	12.0	14.1	14.0	14.0	14.0	16.0	16.0	16.0	16.1												
	HI PR	266	267	269	274	308	309	311	316	352	353	355	359	399	400	402	406	450	451	453	457	504	505	507	511												
	LO PR	129	130	133	139	136	138	141	146	143	145	148	153	149	150	153	159	154	156	159	164	161	163	166	171												
<b>1400</b>	MBh	41.1	41.7	42.8	44.7	40.7	41.3	42.5	44.3	39.7	40.3	41.5	43.3	37.9	38.5	39.7	41.5	35.7	36.3	37.5	39.3	33.8	34.3	35.5	37.3												
	S/T	1.00	0.99	0.84	0.69	1.00	1.00	0.85	0.70	1.00	1.00	0.88	0.73	1.00	1.00	0.90	0.75	1.00	1.00	0.77	0.71	1.00	1.00	1.00	0.82												
	ΔT	30	29	25	22	30	28	25	22	31	29	25	22	30	28	25	22	30	28	25	21	31	29	26	22												
	KW	2.34	2.34	2.33	2.35	2.61	2.61	2.60	2.62	2.91	2.91	2.90	2.92	3.23	3.23	3.23	3.25	3.60	3.59	3.59	3.61	4.02	4.02	4.01	4.04												
	Amps	8.4	8.4	8.3	8.0	9.6	9.6	9.6	10.0	11.0	11.0	10.9	11.0	12.5	12.5	12.4	13.0	14.1	14.1	14.1	14.0	16.1	16.1	16.0	16.1												
	HI PR	269	270	272	276	310	311	313	318	354	355	357	362	401	402	404	409	452	453	455	459	506	507	509	514												
	LO PR	130	132	135	141	138	140	143	148	145	146	150	155	150	152	155	161	156	158	161	166	163	165	168	173												
<b>1575</b>	MBh	41.7	42.3	43.5	45.3	41.4	41.9	43.1	44.9	40.3	40.9	42.1	43.9	38.5	39.1	40.3	42.1	36.4	36.9	38.1	39.9	34.4	34.9	36.1	37.9												
	S/T	1.00	1.00	0.88	0.73	1.00	1.00	0.89	0.74	1.00	1.00	0.91	0.76	1.00	1.00	0.93	0.78	1.00	1.00	0.81	0.81	1.00	1.00	1.00	0.86												
	ΔT	29	28	24	21	29	28	24	21	30	28	24	21	29	28	24	21	29	27	24	20	30	28	25	21												
	KW	2.35	2.35	2.34	2.37	2.62	2.62	2.61	2.63	2.92	2.92	2.91	2.93	3.24	3.24	3.24	3.26	3.61	3.61	3.60	3.62	4.03	4.03	4.03	4.05												
	Amps	8.4	8.4	8.4	8.0	9.7	9.6	9.6	10.0	11.0	11.0	11.0	11.0	12.5	12.5	12.5	13.0	14.2	14.2	14.1	14.0	16.1	16.1	16.1	16.2												
	HI PR	271	272	274	278	312	314	315	320	356	357	359	364	403	404	406	411	454	455	457	462	508	509	511	516												
	LO PR	132	134	137	143	140	142	145	150	147	148	152	157	153	154	157	163	158	160	163	168	165	167	170	175												

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp. + fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE												
		65				75				85				95				105				115				
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
<b>70</b>	1400	MBh	46.4	47.1	48.5	-	46.0	46.7	48.0	-	44.8	45.4	46.8	-	42.7	43.4	44.8	-	40.2	40.8	42.2	-	37.9	38.5	39.9	-
		S/T	0.61	0.54	0.41	-	0.62	0.55	0.41	-	0.65	0.57	0.44	-	0.66	0.59	0.46	-	1.00	0.61	0.48	-	1.00	0.66	0.53	-
	ΔT	19	17	14	-	19	17	14	-	19	18	14	-	19	17	14	-	19	17	14	-	20	18	15	-	
	KW	2.77	2.77	2.76	-	3.09	3.08	3.08	-	3.44	3.44	3.43	-	3.83	3.82	3.82	-	4.26	4.25	4.25	-	4.76	4.76	4.75	-	
	Amps	10.1	10.1	10.0	-	11.5	11.5	11.5	-	13.2	13.2	13.1	-	14.9	14.9	14.9	-	16.9	16.9	16.9	-	19.2	19.2	19.2	-	
	HI PR	257	259	260	-	298	299	301	-	341	342	343	-	386	387	389	-	436	437	438	-	488	489	491	-	
	LO PR	123	125	128	-	131	132	136	-	137	139	142	-	143	145	148	-	148	150	153	-	155	157	160	-	
	MBh	46.9	47.6	48.9	-	46.5	47.1	48.5	-	45.3	45.9	47.3	-	43.2	43.9	45.2	-	40.7	41.3	42.7	-	38.3	39.0	40.4	-	
	S/T	0.66	0.58	0.45	-	0.66	0.59	0.45	-	0.69	0.61	0.48	-	1.00	0.63	0.50	-	1.00	0.65	0.52	-	1.00	0.71	0.57	-	
	ΔT	18	17	13	-	18	17	13	-	19	17	13	-	18	17	13	-	18	16	13	-	19	17	14	-	
KW	2.78	2.78	2.77	-	3.10	3.10	3.09	-	3.45	3.45	3.45	-	3.84	3.84	3.83	-	4.27	4.27	4.26	-	4.77	4.77	4.76	-		
Amps	10.1	10.1	10.1	-	11.6	11.6	11.6	-	13.2	13.2	13.2	-	15.0	15.0	14.9	-	16.9	16.9	16.9	-	19.3	19.2	19.2	-		
HI PR	259	260	262	-	300	301	303	-	342	343	345	-	388	389	391	-	437	438	440	-	490	491	493	-		
LO PR	125	126	129	-	132	134	137	-	139	140	144	-	144	146	149	-	150	151	154	-	157	158	161	-		
MBh	47.9	48.5	49.9	-	47.5	48.1	49.5	-	46.2	46.9	48.3	-	44.2	44.8	46.2	-	41.6	42.3	43.7	-	39.3	40.0	41.3	-		
S/T	0.70	0.62	0.49	-	0.70	0.63	0.49	-	0.73	0.65	0.52	-	1.00	0.67	0.54	-	1.00	0.69	0.56	-	1.00	0.74	0.61	-		
ΔT	17	15	12	-	17	15	12	-	17	16	12	-	17	15	12	-	17	15	12	-	18	16	13	-		
KW	2.80	2.80	2.79	-	3.12	3.11	3.11	-	3.47	3.47	3.46	-	3.86	3.85	3.85	-	4.29	4.28	4.28	-	4.79	4.79	4.78	-		
Amps	10.2	10.2	10.2	-	11.7	11.7	11.6	-	13.3	13.3	13.3	-	15.1	15.0	15.0	-	17.0	17.0	17.0	-	19.3	19.3	19.3	-		
HI PR	262	263	265	-	302	304	305	-	345	346	348	-	391	392	394	-	440	441	443	-	493	494	496	-		
LO PR	127	129	132	-	135	136	140	-	141	143	146	-	147	149	152	-	152	154	157	-	159	161	164	-		
<b>75</b>	1400	MBh	46.4	47.1	48.5	50.6	46.0	46.7	48.1	50.2	44.8	45.5	46.9	49.0	42.7	43.4	44.8	46.9	40.2	40.9	42.2	44.4	37.9	38.5	39.9	42.0
		S/T	0.74	0.67	0.53	0.39	0.75	0.67	0.54	0.40	1.00	0.70	0.56	0.42	1.00	0.72	0.58	0.44	1.00	0.74	0.60	0.46	1.00	1.00	0.66	0.51
	ΔT	23	21	18	15	23	21	18	14	23	22	18	15	23	21	18	14	23	21	18	14	24	22	19	15	
	KW	2.77	2.76	2.76	2.78	3.08	3.08	3.08	3.10	3.44	3.44	3.43	3.46	3.82	3.82	3.82	3.84	4.25	4.25	4.25	4.27	4.76	4.76	4.75	4.77	
	Amps	10.1	10.1	10.0	10.1	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.8	17.0	19.2	19.2	19.1	19.3	
	HI PR	258	259	261	265	298	299	301	306	341	342	344	348	386	388	389	394	436	437	439	443	488	490	491	496	
	LO PR	123	125	128	133	131	132	136	141	137	139	142	147	143	145	148	153	148	150	153	158	155	157	160	165	
	MBh	46.9	47.6	49.0	51.1	46.5	47.2	48.5	50.7	45.3	46.0	47.3	49.5	43.2	43.9	45.3	47.4	40.7	41.3	42.7	44.8	38.4	39.0	40.4	42.5	
	S/T	0.79	0.71	0.58	0.44	0.79	0.72	0.58	0.44	1.00	0.74	0.61	0.47	1.00	0.76	0.63	0.49	1.00	0.78	0.65	0.51	1.00	1.00	0.70	0.56	
	ΔT	22	21	17	14	22	20	17	14	23	21	17	14	22	20	17	14	22	20	17	13	23	21	18	15	
KW	2.78	2.78	2.77	2.80	3.10	3.09	3.09	3.11	3.45	3.45	3.44	3.47	3.84	3.83	3.83	3.85	4.27	4.26	4.26	4.28	4.77	4.77	4.76	4.79		
Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.5	11.7	13.2	13.2	13.2	13.3	15.0	15.0	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3		
HI PR	259	260	262	267	300	301	303	307	342	344	345	350	388	389	391	396	437	439	440	445	490	491	493	498		
LO PR	125	126	129	135	132	134	137	142	139	140	144	149	144	146	149	154	150	151	155	160	157	158	161	167		
MBh	47.9	48.5	49.9	52.0	47.5	48.1	49.5	51.6	46.3	46.9	48.3	50.4	44.2	44.8	46.2	48.3	41.7	42.3	43.7	45.8	39.3	40.0	41.4	43.5		
S/T	0.82	0.75	0.62	0.47	1.00	0.76	0.62	0.48	1.00	0.78	0.65	0.50	1.00	0.80	0.67	0.52	1.00	0.82	0.69	0.55	1.00	1.00	0.74	0.60		
ΔT	21	19	16	13	21	19	16	12	21	20	16	13	21	19	16	12	21	19	16	12	22	20	17	13		
KW	2.80	2.79	2.79	2.81	3.11	3.11	3.11	3.13	3.47	3.47	3.46	3.49	3.85	3.85	3.85	3.87	4.28	4.28	4.28	4.30	4.79	4.79	4.78	4.80		
Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.0	15.0	15.1	17.0	17.0	17.0	17.1	19.3	19.3	19.3	19.4		
HI PR	262	263	265	270	303	304	306	310	345	346	348	353	391	392	394	398	440	441	443	448	493	494	496	500		
LO PR	127	129	132	137	135	136	140	145	142	143	146	151	147	149	152	157	152	154	157	162	159	161	164	169		

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>80</b>	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
	MBh	46.7	47.3	48.7	50.8	46.3	46.9	48.3	50.4	45.1	45.7	47.1	49.2	43.0	43.6	45.0	47.1	40.4	41.1	42.5	44.6	38.1	38.8	40.2	42.3
	S/T	1.00	0.79	0.66	0.5	1.00	0.80	0.66	0.52	1.00	0.82	0.69	0.6	1.00	0.84	0.71	0.57	1.00	1.00	0.73	0.6	1.00	1.00	0.78	0.64
	ΔT	27	25	22	19	27	25	22	18	27	26	22	19	27	25	22	18	27	25	22	18	28	26	23	19
	KW	2.77	2.77	2.76	2.8	3.09	3.08	3.08	3.10	3.44	3.44	3.43	3.5	3.83	3.82	3.82	3.84	4.26	4.25	4.25	4.3	4.76	4.76	4.75	4.78
	Amps	10.1	10.1	10.0	10.2	11.5	11.5	11.5	11.6	13.2	13.1	13.1	13.2	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3
	HI PR	258	259	261	266	299	300	302	306	341	342	344	349	387	388	390	394	436	437	439	444	489	490	492	496
	LO PR	124	125	129	134	131	133	136	141	138	140	143	148	144	145	148	153	149	151	154	159	156	157	160	166
	MBh	47.2	47.8	49.2	51.3	46.8	47.4	48.8	50.9	45.5	46.2	47.6	49.7	43.5	44.1	45.5	47.6	40.9	41.6	43.0	45.1	38.6	39.3	40.6	42.8
	S/T	1.00	0.83	0.70	0.6	1.00	0.84	0.71	0.57	1.00	0.86	0.73	0.6	1.00	1.00	0.75	0.61	1.00	1.00	0.77	0.6	1.00	1.00	0.82	0.68
ΔT	26	25	21	18	26	24	21	18	27	25	21	18	26	24	21	18	26	24	21	17	27	25	22	18	
KW	2.78	2.78	2.77	2.8	3.10	3.10	3.09	3.12	3.45	3.45	3.45	3.5	3.84	3.84	3.83	3.86	4.27	4.27	4.26	4.3	4.77	4.77	4.76	4.79	
Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.6	11.7	13.2	13.2	13.2	13.3	15.0	15.0	14.9	15.1	16.9	16.9	16.9	17.0	19.3	19.2	19.2	19.3	
HI PR	260	261	263	267	300	302	303	308	343	344	346	350	389	390	392	396	438	439	441	445	491	492	493	498	
LO PR	125	127	130	135	133	134	138	143	139	141	144	149	145	146	150	155	150	152	155	160	157	159	162	167	
MBh	48.1	48.8	50.2	52.3	47.7	48.4	49.8	51.9	46.5	47.2	48.5	50.7	44.4	45.1	46.5	48.6	41.9	42.5	43.9	46.0	39.6	40.2	41.6	43.7	
S/T	1.00	0.87	0.74	0.6	1.00	0.88	0.75	0.60	1.00	0.90	0.77	0.6	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.7	1.00	1.00	0.86	0.72	
ΔT	25	23	20	17	25	23	20	16	25	24	20	17	25	23	20	16	25	23	20	16	26	24	21	17	
KW	2.80	2.80	2.79	2.8	3.12	3.11	3.11	3.13	3.47	3.47	3.46	3.5	3.86	3.85	3.85	3.87	4.29	4.28	4.28	4.3	4.79	4.79	4.78	4.81	
Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.6	11.7	13.3	13.3	13.3	13.4	15.1	15.0	15.0	15.1	17.0	17.0	17.0	17.1	19.3	19.3	19.3	19.4	
HI PR	263	264	266	270	303	304	306	311	346	347	349	353	391	392	394	399	441	442	444	448	493	494	496	501	
LO PR	128	130	133	138	136	137	140	145	142	144	147	152	148	149	152	157	153	155	158	163	160	161	165	170	
<b>85</b>	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
	MBh	47.5	48.1	49.5	51.6	47.1	47.7	49.1	51.2	45.8	46.5	47.9	50.0	43.8	44.4	45.8	47.9	41.2	41.9	43.3	45.4	38.9	39.6	40.9	43.0
	S/T	1.00	0.89	0.76	0.62	1.00	0.90	0.76	0.62	1.00	1.00	0.79	0.65	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	1.00	0.74
	ΔT	31	29	26	22	31	29	25	22	31	29	26	22	31	29	25	22	30	29	25	22	31	30	26	23
	KW	2.77	2.77	2.77	2.79	3.09	3.09	3.08	3.11	3.45	3.45	3.44	3.46	3.83	3.83	3.82	3.85	4.26	4.26	4.25	4.28	4.77	4.76	4.76	4.78
	Amps	10.1	10.1	10.1	10.2	11.6	11.6	11.5	11.6	13.2	13.2	13.2	13.3	14.9	14.9	14.9	15.0	16.9	16.9	16.9	17.0	19.2	19.2	19.2	19.3
	HI PR	259	261	262	267	300	301	303	307	342	344	345	350	388	389	391	396	437	439	440	445	490	491	493	498
	LO PR	126	127	130	136	133	135	138	143	140	141	145	150	145	147	150	155	151	152	155	161	158	159	162	168
	MBh	47.9	48.6	50.0	52.1	47.5	48.2	49.6	51.7	46.3	47.0	48.4	50.5	44.2	44.9	46.3	48.4	41.7	42.4	43.7	45.9	39.4	40.0	41.4	43.5
	S/T	1.00	0.93	0.80	0.66	1.00	1.00	0.81	0.67	1.00	1.00	0.83	0.69	1.00	1.00	0.85	0.71	1.00	1.00	0.87	0.73	1.00	1.00	1.00	0.78
ΔT	30	28	25	21	30	28	25	21	30	28	25	21	30	28	25	21	30	28	24	21	31	29	26	22	
KW	2.79	2.78	2.78	2.80	3.10	3.10	3.10	3.12	3.46	3.46	3.45	3.48	3.84	3.84	3.84	3.86	4.27	4.27	4.27	4.29	4.78	4.78	4.77	4.79	
Amps	10.2	10.2	10.1	10.2	11.6	11.6	11.6	11.7	13.2	13.2	13.2	13.3	15.0	15.0	15.0	15.1	17.0	17.0	16.9	17.0	19.3	19.3	19.2	19.4	
HI PR	261	262	264	268	302	303	305	309	344	345	347	351	390	391	393	397	439	440	442	447	492	493	495	499	
LO PR	127	129	132	137	135	136	139	145	141	143	146	151	147	148	151	157	152	154	157	162	159	161	164	169	
MBh	48.9	49.6	51.0	53.1	48.5	49.2	50.5	52.6	47.3	47.9	49.3	51.4	45.2	45.9	47.2	49.4	42.7	43.3	44.7	46.8	40.3	41.0	42.4	44.5	
S/T	1.00	0.97	0.84	0.70	1.00	1.00	0.85	0.70	1.00	1.00	0.87	0.73	1.00	1.00	0.89	0.75	1.00	1.00	1.00	0.77	1.00	1.00	1.00	0.82	
ΔT	29	27	24	20	29	27	23	20	29	27	24	20	29	27	23	20	28	27	23	20	30	28	24	21	
KW	2.80	2.80	2.80	2.82	3.12	3.12	3.11	3.14	3.48	3.48	3.47	3.49	3.86	3.86	3.85	3.88	4.29	4.29	4.28	4.31	4.80	4.79	4.79	4.81	
Amps	10.2	10.2	10.2	10.3	11.7	11.7	11.7	11.8	13.3	13.3	13.3	13.4	15.1	15.1	15.0	15.2	17.1	17.0	17.0	17.1	19.4	19.3	19.3	19.4	
HI PR	264	265	267	271	304	305	307	312	347	348	350	354	393	394	395	400	442	443	445	449	495	496	497	502	
LO PR	130	131	135	140	137	139	142	147	144	145	149	154	149	151	154	159	155	156	160	165	162	163	166	172	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE												ENTERING INDOOR WET BULB TEMPERATURE											
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>70</b>	MBh	58.8	59.6	61.3	-	58.2	59.1	60.8	-	56.7	57.5	59.3	-	54.1	54.9	56.7	-	50.9	51.7	53.5	-	48.0	48.8	50.6	-
	S/T	0.62	0.55	0.42	-	0.62	0.55	0.43	-	0.65	0.58	0.45	-	0.66	0.59	0.47	-	0.69	0.61	0.49	-	1.00	0.66	0.54	-
	ΔT	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	21	19	15	-	22	20	16	-
	KW	3.43	3.42	3.42	-	3.85	3.85	3.84	-	4.33	4.33	4.32	-	4.84	4.84	4.83	-	5.42	5.42	5.41	-	6.09	6.09	6.08	-
	Amps	13.2	13.2	13.1	-	15.1	15.1	15.1	-	17.3	17.3	17.3	-	19.7	19.6	19.6	-	22.3	22.3	22.2	-	25.4	25.4	25.3	-
	HI PR	270	271	273	-	312	313	315	-	356	358	359	-	404	405	407	-	455	457	459	-	510	511	513	-
	LO PR	117	118	121	-	124	125	128	-	130	131	134	-	135	136	139	-	140	141	144	-	146	148	151	-
	MBh	59.7	60.5	62.3	-	59.2	60.0	61.7	-	57.7	58.5	60.2	-	55.1	55.9	57.6	-	51.9	52.7	54.4	-	49.0	49.8	51.5	-
	S/T	0.65	0.58	0.45	-	0.66	0.58	0.46	-	0.68	0.61	0.48	-	0.70	0.63	0.50	-	0.72	0.65	0.52	-	1.00	0.69	0.57	-
	ΔT	20	18	14	-	20	18	14	-	20	18	14	-	20	18	14	-	19	17	14	-	21	19	15	-
KW	3.45	3.44	3.43	-	3.87	3.87	3.86	-	4.35	4.34	4.34	-	4.86	4.86	4.85	-	5.44	5.43	5.43	-	6.11	6.11	6.10	-	
Amps	13.3	13.3	13.2	-	15.2	15.2	15.2	-	17.4	17.4	17.3	-	19.8	19.7	19.7	-	22.4	22.4	22.3	-	25.5	25.5	25.4	-	
HI PR	272	273	275	-	314	316	318	-	359	360	362	-	406	408	409	-	458	459	461	-	513	514	516	-	
LO PR	118	120	123	-	125	127	130	-	132	133	136	-	137	138	141	-	142	143	146	-	148	150	153	-	
MBh	61.2	62.0	63.7	-	60.6	61.5	63.2	-	59.1	60.0	61.7	-	56.5	57.3	59.1	-	53.3	54.2	55.9	-	50.4	51.3	53.0	-	
S/T	0.66	0.59	0.46	-	0.66	0.59	0.47	-	0.69	0.62	0.49	-	0.71	0.64	0.51	-	1.00	0.66	0.53	-	1.00	0.70	0.58	-	
ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	20	18	14	-	
KW	3.47	3.46	3.46	-	3.89	3.89	3.88	-	4.37	4.37	4.36	-	4.88	4.88	4.87	-	5.46	5.46	5.45	-	6.13	6.13	6.12	-	
Amps	13.4	13.3	13.3	-	15.3	15.3	15.3	-	17.5	17.5	17.4	-	19.8	19.8	19.8	-	22.5	22.5	22.4	-	25.6	25.6	25.5	-	
HI PR	275	276	278	-	317	319	320	-	362	363	365	-	409	410	412	-	461	462	464	-	516	517	519	-	
LO PR	121	123	126	-	128	130	133	-	134	136	139	-	140	141	144	-	145	146	149	-	151	152	155	-	
<b>75</b>	MBh	58.8	59.6	61.3	64.0	58.3	59.1	60.8	63.5	56.8	57.6	59.3	62.0	54.1	55.0	56.7	59.3	51.0	51.8	53.5	56.2	48.1	48.9	50.6	53.3
	S/T	0.74	0.67	0.54	0.41	0.74	0.67	0.55	0.41	0.77	0.70	0.57	0.44	1.00	0.71	0.59	0.46	1.00	0.73	0.61	0.48	1.00	0.78	0.66	0.52
	ΔT	25	23	20	16	25	23	19	16	26	24	20	16	25	23	19	16	25	23	19	15	26	24	20	17
	KW	3.42	3.42	3.41	3.45	3.85	3.85	3.84	3.87	4.33	4.32	4.32	4.35	4.84	4.84	4.83	4.86	5.42	5.41	5.41	5.44	6.09	6.09	6.08	6.11
	Amps	13.2	13.1	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.2	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5
	HI PR	270	271	273	278	312	314	315	320	357	358	360	364	404	405	407	412	456	457	459	463	511	512	514	518
	LO PR	117	118	121	126	124	125	128	133	130	131	134	139	135	136	139	144	140	141	144	149	146	148	151	155
	MBh	59.7	60.6	62.3	64.9	59.2	60.0	61.8	64.4	57.7	58.5	60.3	62.9	55.1	55.9	57.6	60.3	51.9	52.7	54.5	57.1	49.0	49.8	51.6	54.2
	S/T	0.77	0.70	0.57	0.44	0.78	0.70	0.58	0.45	0.80	0.73	0.60	0.47	1.00	0.75	0.62	0.49	1.00	0.77	0.64	0.51	1.00	0.81	0.69	0.56
	ΔT	24	22	18	15	24	22	18	14	25	23	19	15	24	22	18	14	24	22	18	14	25	23	19	15
KW	3.44	3.44	3.43	3.46	3.87	3.87	3.86	3.89	4.34	4.34	4.33	4.37	4.86	4.86	4.85	4.88	5.44	5.43	5.42	5.46	6.11	6.11	6.10	6.13	
Amps	13.3	13.2	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.4	25.4	25.6	
HI PR	272	274	276	280	315	316	318	322	359	360	362	367	407	408	410	414	458	459	461	466	513	514	516	521	
LO PR	118	120	123	128	125	127	130	135	132	133	136	141	137	138	141	146	142	143	146	151	148	150	153	157	
MBh	61.2	62.0	63.8	66.4	60.7	61.5	63.2	65.9	59.2	60.0	61.7	64.4	56.6	57.4	59.1	61.8	53.4	54.2	55.9	58.6	50.5	51.3	53.0	55.7	
S/T	0.78	0.71	0.58	0.45	0.78	0.71	0.59	0.46	1.00	0.74	0.61	0.48	1.00	0.75	0.63	0.50	1.00	0.78	0.65	0.52	1.00	0.82	0.70	0.56	
ΔT	23	21	17	13	23	21	17	13	23	21	18	14	23	21	17	13	23	21	17	13	24	22	18	14	
KW	3.46	3.46	3.45	3.49	3.89	3.89	3.88	3.91	4.37	4.36	4.36	4.39	4.88	4.88	4.87	4.90	5.46	5.45	5.45	5.48	6.13	6.13	6.12	6.15	
Amps	13.3	13.3	13.3	13.4	15.3	15.3	15.3	15.4	17.5	17.5	17.4	17.6	19.8	19.8	19.8	19.9	22.5	22.5	22.4	22.6	25.6	25.5	25.5	25.7	
HI PR	275	277	278	283	318	319	321	325	362	363	365	370	410	411	413	417	461	462	464	469	516	517	519	523	
LO PR	121	123	126	131	128	130	133	138	134	136	139	144	140	141	144	149	145	146	149	154	151	152	155	160	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects ACCA (TVA) conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1550</b>	MBh	59.1	59.9	61.6	64.3	58.6	59.4	61.1	63.8	57.1	57.9	59.6	62.3	54.4	55.3	57.0	59.6	51.3	52.1	53.8	56.5	48.4	49.2	50.9	53.6
	S/T	0.85	0.78	0.66	0.5	1.00	0.79	0.66	0.53	1.00	0.81	0.69	0.6	1.00	0.83	0.70	0.57	1.00	0.85	0.72	0.6	1.00	1.00	0.77	0.64
	ΔT	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	30	28	24	20	31	29	25	21
	KW	3.43	3.42	3.42	3.5	3.85	3.85	3.84	3.87	4.33	4.32	4.32	4.4	4.84	4.84	4.83	4.87	5.42	5.42	5.41	5.4	6.09	6.09	6.08	6.12
	Amps	13.2	13.2	13.1	13.3	15.1	15.1	15.1	15.2	17.3	17.3	17.3	17.4	19.7	19.6	19.6	19.8	22.3	22.3	22.2	22.4	25.4	25.4	25.3	25.5
	HI PR	271	272	274	278	313	314	316	321	357	358	360	365	405	406	408	413	456	457	459	464	511	512	514	519
LO PR	117	118	121	126	124	125	128	133	130	132	135	139	135	137	140	145	140	142	145	150	147	148	151	156	
<b>80</b>	MBh	60.0	60.9	62.6	65.2	59.5	60.3	62.1	64.7	58.0	58.8	60.6	63.2	55.4	56.2	57.9	60.6	52.2	53.0	54.8	57.4	49.3	50.1	51.9	54.5
	S/T	0.89	0.81	0.69	0.6	1.00	0.82	0.70	0.56	1.00	0.84	0.72	0.6	1.00	0.86	0.74	0.60	1.00	0.88	0.76	0.6	1.00	1.00	0.80	0.67
	ΔT	29	27	23	19	29	27	23	19	29	27	23	19	29	27	23	19	29	26	23	19	30	28	24	20
	KW	3.44	3.44	3.43	3.5	3.87	3.87	3.86	3.89	4.35	4.34	4.34	4.4	4.86	4.86	4.85	4.88	5.44	5.43	5.43	5.5	6.11	6.11	6.10	6.13
	Amps	13.3	13.2	13.2	13.4	15.2	15.2	15.2	15.3	17.4	17.4	17.3	17.5	19.7	19.7	19.7	19.8	22.4	22.4	22.3	22.5	25.5	25.5	25.4	25.6
	HI PR	273	274	276	281	315	316	318	323	359	361	362	367	407	408	410	415	458	460	462	466	513	514	516	521
LO PR	119	120	123	128	126	127	130	135	132	134	136	141	137	139	142	146	142	144	147	152	149	150	153	158	
<b>2000</b>	MBh	61.5	62.3	64.1	66.7	61.0	61.8	63.5	66.2	59.5	60.3	62.0	64.7	56.9	57.7	59.4	62.1	53.7	54.5	56.2	58.9	50.8	51.6	53.3	56.0
	S/T	0.89	0.82	0.70	0.6	1.00	0.83	0.70	0.57	1.00	0.85	0.73	0.6	1.00	0.87	0.75	0.61	1.00	1.00	0.77	0.6	1.00	1.00	0.81	0.68
	ΔT	28	26	22	18	28	26	22	18	28	26	22	18	28	26	22	18	27	25	21	18	29	27	23	19
	KW	3.47	3.46	3.46	3.5	3.89	3.89	3.88	3.91	4.37	4.36	4.36	4.4	4.88	4.88	4.87	4.90	5.46	5.46	5.45	5.5	6.13	6.13	6.12	6.16
	Amps	13.4	13.3	13.3	13.5	15.3	15.3	15.3	15.4	17.5	17.5	17.4	17.6	19.8	19.8	19.8	19.9	22.5	22.5	22.4	22.6	25.6	25.6	25.5	25.7
	HI PR	276	277	279	284	318	319	321	326	362	364	365	370	410	411	413	418	461	463	464	469	516	517	519	524
LO PR	122	123	126	131	129	130	133	138	135	136	139	144	140	142	144	149	145	147	150	154	152	153	156	161	

IDB		OUTDOOR AMBIENT TEMPERATURE																							
		65				75				85				95				105				115			
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
<b>1550</b>	MBh	60.1	60.9	62.6	65.3	59.5	60.4	62.1	64.7	58.0	58.8	60.6	63.2	55.4	56.2	58.0	60.6	52.2	53.1	54.8	57.4	49.3	50.2	51.9	54.5
	S/T	1.00	0.88	0.75	0.62	1.00	0.88	0.76	0.62	1.00	0.91	0.78	0.65	1.00	1.00	0.80	0.67	1.00	1.00	0.82	0.69	1.00	1.00	0.87	0.73
	ΔT	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	34	32	28	24	35	33	29	25
	KW	3.43	3.43	3.42	3.46	3.86	3.86	3.85	3.88	4.34	4.33	4.33	4.36	4.85	4.85	4.84	4.87	5.43	5.42	5.42	5.45	6.10	6.10	6.09	6.12
	Amps	13.2	13.2	13.2	13.3	15.2	15.1	15.1	15.3	17.3	17.3	17.3	17.4	19.7	19.7	19.7	19.8	22.3	22.3	22.3	22.4	25.4	25.4	25.4	25.5
	HI PR	272	273	275	280	314	315	317	322	358	360	361	366	406	407	409	414	457	459	460	465	512	513	515	520
LO PR	119	120	123	128	126	127	130	135	132	133	136	141	137	138	141	146	142	144	146	151	148	150	153	158	
<b>1750</b>	MBh	61.0	61.8	63.6	66.2	60.5	61.3	63.0	65.7	59.0	59.8	61.5	64.2	56.4	57.2	58.9	61.6	53.2	54.0	55.7	58.4	50.3	51.1	52.8	55.5
	S/T	1.00	0.91	0.78	0.65	1.00	0.91	0.79	0.66	1.00	0.94	0.81	0.68	1.00	1.00	0.83	0.70	1.00	1.00	0.85	0.72	1.00	1.00	0.90	0.77
	ΔT	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	33	31	27	23	34	32	28	24
	KW	3.45	3.45	3.44	3.48	3.88	3.88	3.87	3.90	4.36	4.35	4.34	4.38	4.87	4.87	4.86	4.89	5.45	5.44	5.44	5.47	6.12	6.12	6.11	6.14
	Amps	13.3	13.3	13.3	13.4	15.3	15.2	15.2	15.4	17.4	17.4	17.4	17.5	19.8	19.8	19.7	19.9	22.4	22.4	22.4	22.5	25.5	25.5	25.5	25.6
	HI PR	274	275	277	282	316	318	319	324	361	362	364	368	408	410	411	416	460	461	463	467	515	516	518	522
LO PR	121	122	125	130	128	129	132	137	134	135	138	143	139	140	143	148	144	145	148	153	150	152	155	160	
<b>2000</b>	MBh	62.5	63.3	65.0	67.7	62.0	62.8	64.5	67.2	60.4	61.3	63.0	65.6	57.8	58.7	60.4	63.0	54.7	55.5	57.2	59.9	51.7	52.6	54.3	56.9
	S/T	1.00	0.92	0.79	0.66	1.00	0.92	0.80	0.67	1.00	1.00	0.82	0.69	1.00	1.00	0.84	0.71	1.00	1.00	0.86	0.73	1.00	1.00	0.91	0.77
	ΔT	32	30	26	22	32	30	26	22	32	30	26	22	32	30	26	22	31	29	26	22	33	31	27	23
	KW	3.47	3.47	3.46	3.50	3.90	3.90	3.89	3.92	4.38	4.37	4.37	4.40	4.89	4.89	4.88	4.91	5.47	5.46	5.46	5.49	6.14	6.14	6.13	6.16
	Amps	13.4	13.4	13.3	13.5	15.3	15.3	15.3	15.4	17.5	17.5	17.5	17.6	19.9	19.9	19.8	20.0	22.5	22.5	22.5	22.6	25.6	25.6	25.6	25.7
	HI PR	277	278	280	285	319	321	322	327	364	365	367	371	411	412	414	419	463	464	466	470	518	519	521	525
LO PR	124	125	128	133	131	132	135	140	137	138	141	146	142	143	146	151	147	148	151	156	153	155	158	162	

IDB: Entering Indoor Dry Bulb Temperature  
 High and low pressures are measured at the liquid and suction service valves.  
 Shaded area reflects AHRI conditions  
 kW = Total system power  
 Amps = outdoor unit amps (comp.+fan)



ASX140181K* / CA*F3636*6** W/.052" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 600 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	19,300	13,124	6,176	1,220
80	19,050	13,142	5,908	1,290
85	18,800	13,160	5,640	1,360
90	18,400	13,060	5,340	1,435
<b>95</b>	<b>18,000</b>	<b>12,960</b>	<b>5,040</b>	<b>1,510</b>
100	17,500	12,770	4,730	1,595
105	17,000	12,580	4,420	1,680
110	16,550	12,650	3,901	1,780
115	16,100	12,719	3,381	1,880
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>17,400</b>	<b>12,700</b>	<b>4,700</b>	<b>1,510</b>

ASX140191K* / CA*F3636*6** W/.053" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	18,900	13,041	5,859	1,160
80	18,650	13,145	5,506	1,225
85	18,400	13,248	5,152	1,290
90	18,000	13,136	4,864	1,360
<b>95</b>	<b>17,600</b>	<b>13,024</b>	<b>4,576</b>	<b>1,430</b>
100	17,100	12,820	4,280	1,530
105	16,600	12,616	3,984	1,590
110	16,150	12,667	3,484	1,680
115	15,700	12,717	2,983	1,770
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>17,000</b>	<b>12,750</b>	<b>4,250</b>	<b>1,430</b>

ASX140241L* / CA*F3636*6** W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 700 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	24,877	16,961	7,916	1,554
80	24,568	17,040	7,528	1,644
85	24,260	17,120	7,140	1,735
90	23,730	16,961	6,769	1,833
<b>95</b>	<b>23,200</b>	<b>16,802</b>	<b>6,397</b>	<b>1,931</b>
100	22,552	16,564	5,988	2,040
105	21,904	16,326	5,578	2,149
110	21,312	16,393	4,919	2,278
115	20,721	16,461	4,260	2,406
TVA CONDITIONS @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>22,400</b>	<b>16,802</b>	<b>5,598</b>	<b>1,931</b>

ASX140251L* / CA*F3636*6** W/.057" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 700 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	25,500	17,085	8,415	1,570
80	25,200	17,258	7,943	1,660
85	24,900	17,430	7,470	1,750
90	24,350	17,283	7,067	1,850
<b>95</b>	<b>23,800</b>	<b>17,136</b>	<b>6,664</b>	<b>1,950</b>
100	23,150	16,893	6,257	2,060
105	22,500	16,650	5,850	2,170
110	21,900	16,739	5,162	2,300
115	21,300	16,827	4,473	2,430
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>23,000</b>	<b>16,790</b>	<b>6,210</b>	<b>1,950</b>

ASX140301K* / CA*F3642*6** W/.065" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,900	21,630	9,270	1,960
80	30,500	21,651	8,849	2,070
85	30,100	21,672	8,428	2,180
90	29,450	21,492	7,958	2,300
<b>95</b>	<b>28,800</b>	<b>21,312</b>	<b>7,488</b>	<b>2,420</b>
100	28,000	20,992	7,008	2,550
105	27,200	20,672	6,528	2,680
110	26,450	20,745	5,706	2,840
115	25,700	20,817	4,883	3,000
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>27,800</b>	<b>20,850</b>	<b>6,950</b>	<b>2,420</b>

ASX140311K* / CA*F3137*6** W/.063" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1000 CFM				
OUTDOOR TEM. ° F.	TOTAL BTU/H	SENSIBLE BTU/H	LATENT BTU/H	TOTAL WATTS
75	30,700	22,718	7,982	1,920
80	30,300	22,871	7,430	2,025
85	29,900	23,023	6,877	2,130
90	29,250	22,809	6,442	2,245
<b>95</b>	<b>28,600</b>	<b>22,594</b>	<b>6,006</b>	<b>2,360</b>
100	27,800	22,232	5,568	2,490
105	27,000	21,870	5,130	2,620
110	26,250	21,900	4,350	2,770
115	25,500	21,930	3,570	2,920
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>27,600</b>	<b>20,080</b>	<b>5,520</b>	<b>2,360</b>



ASX140361K* / CA*F3642*6** W/.068" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1200 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,700	25,690	11,010	2,330
80	36,250	25,733	10,517	2,460
85	35,800	25,776	10,024	2,590
90	35,000	25,542	9,458	2,730
<b>95</b>	<b>34,200</b>	<b>25,308</b>	<b>8,892</b>	<b>2,870</b>
100	33,250	24,928	8,322	3,030
105	32,300	24,548	7,752	3,190
110	31,400	24,627	6,774	3,370
115	30,500	24,705	5,795	3,550
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>33,000</b>	<b>24,750</b>	<b>8,250</b>	<b>2,870</b>

ASX140371K* / CA*F3137*6** W/.071" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1100 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	36,500	25,915	10,585	2,260
80	36,050	26,130	9,921	2,400
85	35,600	26,344	9,256	2,540
90	34,800	26,092	8,708	2,675
<b>95</b>	<b>34,000</b>	<b>25,840</b>	<b>8,160</b>	<b>2,810</b>
100	33,050	25,439	7,611	2,970
105	32,100	25,038	7,062	3,130
110	31,250	25,135	6,115	3,315
115	30,400	25,232	5,168	3,500
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>32,800</b>	<b>25,256</b>	<b>7,544</b>	<b>2,810</b>

ASX140421K* / CA*F4961*6** W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
<b>95</b>	<b>39,000</b>	<b>30,810</b>	<b>8,190</b>	<b>3,220</b>
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>37,600</b>	<b>30,080</b>	<b>7,520</b>	<b>3,220</b>

ASX140431K* / CA*F4961*6D* W/.074" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	41,800	30,932	10,868	2,600
80	41,300	31,174	10,126	2,750
85	40,800	31,416	9,384	2,900
90	39,900	31,113	8,787	3,060
<b>95</b>	<b>39,000</b>	<b>30,810</b>	<b>8,190</b>	<b>3,220</b>
100	37,900	30,309	7,591	3,400
105	36,800	29,808	6,992	3,580
110	35,800	30,042	5,758	3,795
115	34,800	30,276	4,524	4,010
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>37,600</b>	<b>30,080</b>	<b>7,520</b>	<b>3,220</b>

ASX140481K / CA*F4860*6** W/.078" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1400 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	48,300	31,878	16,422	3,080
80	47,700	32,189	15,511	3,255
85	47,100	32,500	14,600	3,430
90	46,050	32,225	13,825	3,625
<b>95</b>	<b>45,000</b>	<b>31,950</b>	<b>13,050</b>	<b>3,820</b>
100	43,750	31,488	12,263	4,035
105	42,500	31,025	11,475	4,250
110	41,350	31,191	10,160	4,500
115	40,200	31,356	8,844	4,750
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>43,400</b>	<b>31,248</b>	<b>12,152</b>	<b>3,820</b>

ASX140601K* / CA*F4961*6** W/.088" ORIFICE CONDITIONS: 80 °F IBD, 67 °F IWB @ 1550 CFM				
OUTDOOR TEM. ° F.	TOTAL BTUH	SENSIBLE BTUH	LATENT BTUH	TOTAL WATTS
75	61,100	40,326	20,774	3,840
80	60,350	40,725	19,625	4,080
85	59,600	41,124	18,476	4,320
90	58,300	40,512	17,788	4,575
<b>95</b>	<b>57,000</b>	<b>39,900</b>	<b>17,100</b>	<b>4,830</b>
100	55,400	39,318	16,082	5,120
105	53,800	38,736	15,064	5,410
110	52,350	38,965	13,386	5,745
115	50,900	39,193	11,707	6,080
TVA Conditions @ 95° OD DB, 75° ID DB 63° ID WB				
<b>95°</b>	<b>55,000</b>	<b>39,050</b>	<b>15,950</b>	<b>4,840</b>



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0181L*	ARUF25B14A*		17,800	13,000	14	12.2	620	202348492
	ASPT25B14A*		17,800	13,000	14.5	12.2	580	202348493
	ASPT29B14A*		18,000	13,200	15	12.5	570	202348494
	ASPT33C14B*		18,000	13,200	15	12.5	630	202348495
	AVPTC25B14A*		18,000	13,200	14.5	12.2	650	202348496
	AVPTC29B14A*		18,200	13,200	15	12.5	610	202348497
	AVPTC33C14A*		18,200	13,200	15	12.5	650	202348498
	AWUF19XX16A*		17,000	12,400	14	12.2	585	202348499
	AWUF31XX16A*		17,400	12,600	15	12.5	600	202348500
	AWUF32XX16A*		17,400	12,600	15	12.5	560	202348501
	CA*F3137*6A*	A*EC960302BNA*	18,000	13,200	15	12.5	565	202348502
	CA*F3137*6A*	A*EC960303ANA*	17,800	13,000	15	12.5	650	202348516
	CA*F3137*6A*	A*EC960402BNA*	18,000	13,200	15	12.5	570	202348525
	CA*F3137*6A*	A*EC960403ANA*	17,800	13,000	15	12.5	615	202348537
	CA*F3137*6A*	A*EC960403BNA*	18,000	13,200	15	12.5	590	202348546
	CA*F3137*6A*	A*EC960603ANA*	17,800	13,000	15	12.5	580	202348558
	CA*F3137*6A*	A*EC960603BNA*	18,000	13,200	15	12.5	510	202348567
	CA*F3137*6A*	A*EC960803BNA*	18,000	13,200	15	12.5	545	202348579
	CA*F3137*6A*	A*VC80603B*B*	18,000	13,200	15	12.5	610	202348591
	CA*F3137*6A*	A*VC80603B*C*	18,000	13,200	15	12.5	610	202348628
	CA*F3137*6A*	A*VC80604B*B*	18,000	13,200	15	12.5	620	202348604
	CA*F3137*6A*	A*VC80604B*C*	18,000	13,200	15	12.5	620	202348640
	CA*F3137*6A*	A*VC80803B*B*	18,000	13,200	15	12.5	610	202348616
	CA*F3137*6A*	A*VC80803B*C*	18,000	13,200	15	12.5	610	202348652
	CA*F3137*6A*	A*VC960403BNB*	18,000	13,200	15	12.5	615	202348665
	CA*F3137*6A*	A*VC960603BNB*	18,000	13,200	15	12.5	625	202348677
	CA*F3137*6A*	A*VC960803BNB*	18,000	13,200	15	12.5	620	202348689
	CA*F3137*6A*	A*VM970603BNA*	18,000	13,200	15	12.5	620	202348701
	CA*F3137*6A*	A*VM970803BNA*	18,000	13,200	15	12.5	630	202348714
	CA*F3137*6A*+EEP		17,800	13,000	14	12.2	525	202348490
	CA*F3137*6A*+EEP+TXV		17,800	13,000	14.5	12.2	525	202348491
	CA*F3137*6A*+MBVC1200**-1A*		18,200	13,200	15	12.5	595	202348726
	CA*F3137*6A*+MBVC1200**-1A*+TXV		18,200	13,200	15.5	12.5	595	202348727
	CA*F3137*6A*+TXV	A*EC960302BNA*	18,000	13,200	15.5	12.5	565	202348503
	CA*F3137*6A*+TXV	A*EC960303ANA*	17,800	13,000	15.5	12.5	650	202348517
	CA*F3137*6A*+TXV	A*EC960402BNA*	18,000	13,200	15.5	12.5	570	202348526
	CA*F3137*6A*+TXV	A*EC960403ANA*	17,800	13,000	15.5	12.5	615	202348538
	CA*F3137*6A*+TXV	A*EC960403BNA*	18,000	13,200	15.5	12.5	590	202348547
	CA*F3137*6A*+TXV	A*EC960603ANA*	17,800	13,000	15.5	12.5	580	202348559
	CA*F3137*6A*+TXV	A*EC960603BNA*	18,000	13,200	15.5	12.5	510	202348568
	CA*F3137*6A*+TXV	A*EC960803BNA*	18,000	13,200	15.5	12.5	545	202348580
	CA*F3137*6A*+TXV	A*VC80603B*B*	18,000	13,200	15.5	12.5	610	202348592
	CA*F3137*6A*+TXV	A*VC80603B*C*	18,000	13,200	15.5	12.5	610	202348629
	CA*F3137*6A*+TXV	A*VC80604B*B*	18,000	13,200	15.5	12.5	620	202348605
	CA*F3137*6A*+TXV	A*VC80604B*C*	18,000	13,200	15.5	12.5	620	202348641
	CA*F3137*6A*+TXV	A*VC80803B*B*	18,000	13,200	15.5	12.5	610	202348617
	CA*F3137*6A*+TXV	A*VC80803B*C*	18,000	13,200	15.5	12.5	610	202348653
	CA*F3137*6A*+TXV	A*VC960403BNB*	18,000	13,200	15.5	12.5	615	202348666
	CA*F3137*6A*+TXV	A*VC960603BNB*	18,000	13,200	15.5	12.5	625	202348678
	CA*F3137*6A*+TXV	A*VC960803BNB*	18,000	13,200	15.5	12.5	620	202348690
	CA*F3137*6A*+TXV	A*VM970603BNA*	18,000	13,200	15.5	12.5	620	202348702
	CA*F3137*6A*+TXV	A*VM970803BNA*	18,000	13,200	15.5	12.5	630	202348715
	CA*F3636*6D*	A*EC960302BNA*	17,800	13,000	14.5	12.5	565	202348504
	CA*F3636*6D*	A*EC960303ANA*	17,600	12,800	14.5	12.5	650	202348518
	CA*F3636*6D*	A*EC960402BNA*	17,800	13,000	14.5	12.5	570	202348527
	CA*F3636*6D*	A*EC960403ANA*	17,600	12,800	14.5	12.5	615	202348539
	CA*F3636*6D*	A*EC960403BNA*	17,600	12,800	14.5	12.5	590	202348548
	CA*F3636*6D*	A*EC960603ANA*	17,800	13,000	14.5	12.5	580	202348560
	CA*F3636*6D*	A*EC960603BNA*	17,800	13,000	14.5	12.5	510	202348569
	CA*F3636*6D*	A*EC960803BNA*	17,800	13,000	14.5	12.5	545	202348581
CA*F3636*6D*	A*VC80603B*B*	17,800	13,000	14.5	12.5	610	202348593	
CA*F3636*6D*	A*VC80603B*C*	17,800	13,000	14.5	12.5	610	202348630	
CA*F3636*6D*	A*VC80604B*B*	17,800	13,000	14.5	12.5	620	202348606	
CA*F3636*6D*	A*VC80604B*C*	17,800	13,000	14.5	12.5	620	202348642	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0181L* (Contd.)	CA*F3636*6D*	A*VC80803B*B*	17,800	13,000	14.5	12.5	610	202348618
	CA*F3636*6D*	A*VC80803B*C*	17,800	13,000	14.5	12.5	610	202348654
	CA*F3636*6D*	A*VC960403BNB*	17,800	13,000	14.5	12.5	615	202348667
	CA*F3636*6D*	A*VC960603BNB*	17,800	13,000	14.5	12.5	625	202348679
	CA*F3636*6D*	A*VC960803BNB*	17,800	13,000	14.5	12.5	620	202348691
	CA*F3636*6D*	A*VM970603BNA*	17,800	13,000	14.5	12.5	620	202348703
	CA*F3636*6D*	A*VM970803BNA*	17,800	13,000	14.5	12.5	630	202348716
	CA*F3636*6D*+EEP+TXV		17,600	12,800	14	12.2	550	202348478
	CA*F3636*6D*+MBVC1200**-1A*		18,000	13,200	14.5	12.5	595	202348728
	CA*F3636*6D*+MBVC1200**-1A*+TXV		18,000	13,200	15	12.5	595	202348729
	CA*F3636*6D*+TXV	A*EC960302BNA*	17,800	13,000	15	12.5	565	202348505
	CA*F3636*6D*+TXV	A*EC960303ANA*	17,600	12,800	15	12.5	650	202348519
	CA*F3636*6D*+TXV	A*EC960402BNA*	17,800	13,000	15	12.5	570	202348528
	CA*F3636*6D*+TXV	A*EC960403ANA*	17,600	12,800	15	12.5	615	202348540
	CA*F3636*6D*+TXV	A*EC960403BNA*	17,600	12,800	15	12.5	590	202348549
	CA*F3636*6D*+TXV	A*EC960603ANA*	17,800	13,000	15	12.5	580	202348561
	CA*F3636*6D*+TXV	A*EC960603BNA*	17,800	13,000	15	12.5	510	202348570
	CA*F3636*6D*+TXV	A*EC960803BNA*	17,800	13,000	15	12.5	545	202348582
	CA*F3636*6D*+TXV	A*VC80603B*B*	17,800	13,000	15	12.5	610	202348594
	CA*F3636*6D*+TXV	A*VC80603B*C*	17,800	13,000	15	12.5	610	202348631
	CA*F3636*6D*+TXV	A*VC80604B*B*	17,800	13,000	15	12.5	620	202348607
	CA*F3636*6D*+TXV	A*VC80604B*C*	17,800	13,000	15	12.5	620	202348643
	CA*F3636*6D*+TXV	A*VC80803B*B*	17,800	13,000	15	12.5	610	202348619
	CA*F3636*6D*+TXV	A*VC80803B*C*	17,800	13,000	15	12.5	610	202348655
	CA*F3636*6D*+TXV	A*VC960403BNB*	17,800	13,000	15	12.5	615	202348668
	CA*F3636*6D*+TXV	A*VC960603BNB*	17,800	13,000	15	12.5	625	202348680
	CA*F3636*6D*+TXV	A*VC960803BNB*	17,800	13,000	15	12.5	620	202348692
	CA*F3636*6D*+TXV	A*VM970603BNA*	17,800	13,000	15	12.5	620	202348704
	CA*F3636*6D*+TXV	A*VM970803BNA*	17,800	13,000	15	12.5	630	202348717
	CA*F3743*6D*	A*EC960302BNA*	18,000	13,200	15	12.5	565	202348506
	CA*F3743*6D*	A*EC960402BNA*	18,000	13,200	15	12.5	570	202348529
	CA*F3743*6D*	A*EC960403BNA*	17,800	13,000	15	12.5	590	202348550
	CA*F3743*6D*	A*EC960603BNA*	18,000	13,200	15	12.5	510	202348571
	CA*F3743*6D*	A*EC960803BNA*	18,000	13,200	15	12.5	545	202348583
	CA*F3743*6D*	A*VC80603B*B*	18,000	13,200	15	12.5	610	202348595
	CA*F3743*6D*	A*VC80603B*C*	18,000	13,200	15	12.5	610	202348632
	CA*F3743*6D*	A*VC80604B*B*	18,000	13,200	15	12.5	620	202348608
	CA*F3743*6D*	A*VC80604B*C*	18,000	13,200	15	12.5	620	202348644
	CA*F3743*6D*	A*VC80803B*B*	18,000	13,200	15	12.5	610	202348620
	CA*F3743*6D*	A*VC80803B*C*	18,000	13,200	15	12.5	610	202348656
	CA*F3743*6D*	A*VC960403BNB*	18,000	13,200	15	12.5	615	202348669
	CA*F3743*6D*	A*VC960603BNB*	18,000	13,200	15	12.5	625	202348681
	CA*F3743*6D*	A*VC960803BNB*	18,000	13,200	15	12.5	620	202348693
	CA*F3743*6D*	A*VM970603BNA*	18,000	13,200	15	12.5	620	202348705
	CA*F3743*6D*	A*VM970803BNA*	18,000	13,200	15	12.5	630	202348718
	CA*F3743*6D*+EEP		17,800	13,000	14	12.2	600	202348479
	CA*F3743*6D*+EEP+TXV		18,000	13,200	14.5	12.2	600	202348480
	CA*F3743*6D*+MBVC1200**-1A*		18,200	13,200	15	12.5	595	202348730
	CA*F3743*6D*+MBVC1200**-1A*+TXV		18,200	13,200	15.5	12.5	595	202348731
	CA*F3743*6D*+TXV	A*EC960302BNA*	18,000	13,200	15.5	12.5	565	202348507
CA*F3743*6D*+TXV	A*EC960402BNA*	18,000	13,200	15.5	12.5	570	202348530	
CA*F3743*6D*+TXV	A*EC960403BNA*	17,800	13,000	15.5	12.5	590	202348551	
CA*F3743*6D*+TXV	A*EC960603BNA*	18,000	13,200	15.5	12.5	510	202348572	
CA*F3743*6D*+TXV	A*EC960803BNA*	18,000	13,200	15.5	12.5	545	202348584	
CA*F3743*6D*+TXV	A*VC80603B*B*	18,000	13,200	15.5	12.5	610	202348596	
CA*F3743*6D*+TXV	A*VC80603B*C*	18,000	13,200	15.5	12.5	610	202348633	
CA*F3743*6D*+TXV	A*VC80604B*B*	18,000	13,200	15.5	12.5	620	202348609	
CA*F3743*6D*+TXV	A*VC80604B*C*	18,000	13,200	15.5	12.5	620	202348645	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0181L* (Contd.)	CA*F3743*6D*+TXV	A*VC80803B*B*	18,000	13,200	15.5	12.5	610	202348621
	CA*F3743*6D*+TXV	A*VC80803B*C*	18,000	13,200	15.5	12.5	610	202348657
	CA*F3743*6D*+TXV	A*VC960403BNB*	18,000	13,200	15.5	12.5	615	202348670
	CA*F3743*6D*+TXV	A*VC960603BNB*	18,000	13,200	15.5	12.5	625	202348682
	CA*F3743*6D*+TXV	A*VC960803BNB*	18,000	13,200	15.5	12.5	620	202348694
	CA*F3743*6D*+TXV	A*VM970603BNA*	18,000	13,200	15.5	12.5	620	202348706
	CA*F3743*6D*+TXV	A*VM970803BNA*	18,000	13,200	15.5	12.5	630	202348719
	CAPFA1818*6A*	A*EC960302BNA*	18,000	13,200	15	12.5	565	202348508
	CAPFA1818*6A*	A*EC960303ANA*	18,000	13,200	15	12.5	650	202349076
	CAPFA1818*6A*	A*EC960402BNA*	18,000	13,200	15	12.5	570	202348531
	CAPFA1818*6A*	A*EC960403ANA*	18,000	13,200	15	12.5	615	202348541
	CAPFA1818*6A*	A*EC960403BNA*	18,000	13,200	15	12.5	590	202348552
	CAPFA1818*6A*	A*EC960603ANA*	18,000	13,200	15	12.5	580	202348562
	CAPFA1818*6A*	A*EC960603BNA*	17,800	13,000	15	12.5	510	202348573
	CAPFA1818*6A*	A*EC960803BNA*	18,000	13,200	15	12.5	545	202348585
	CAPFA1818*6A*	A*VC80603B*B*	18,000	13,200	15	12.5	610	202348597
	CAPFA1818*6A*	A*VC80603B*C*	18,000	13,200	15	12.5	610	202348634
	CAPFA1818*6A*	A*VC80604B*B*	18,000	13,200	15	12.5	620	202349123
	CAPFA1818*6A*	A*VC80604B*C*	18,000	13,200	15	12.5	620	202348646
	CAPFA1818*6A*	A*VC80803B*B*	18,000	13,200	15	12.5	610	202348622
	CAPFA1818*6A*	A*VC80803B*C*	18,000	13,200	15	12.5	610	202348658
	CAPFA1818*6A*	A*VC960403BNB*	18,000	13,200	15	12.5	615	202348671
	CAPFA1818*6A*	A*VC960603BNB*	18,000	13,200	15	12.5	625	202348683
	CAPFA1818*6A*	A*VC960803BNB*	18,000	13,200	15	12.5	620	202348695
	CAPFA1818*6A*	A*VM970603BNA*	18,000	13,200	15	12.5	620	202348707
	CAPFA1818*6A*	A*VM970803BNA*	18,000	13,200	15	12.5	630	202349175
	CAPFA1818*6A*+EEP		18,000	13,200	14	12.2	650	202348481
	CAPFA1818*6A*+EEP+TXV		18,000	13,200	14.5	12.2	650	202348482
	CAPFA1818*6A*+MBVC1200**-1A*		18,000	13,200	14.5	12.5	595	202348732
	CAPFA1818*6A*+MBVC1200**-1A*+TXV		18,000	13,200	15	12.5	595	202348733
	CAPFA1818*6A*+TXV	A*EC960302BNA*	18,000	13,200	15.5	12.5	565	202348509
	CAPFA1818*6A*+TXV	A*EC960303ANA*	18,000	13,200	15.5	12.5	650	202349077
	CAPFA1818*6A*+TXV	A*EC960402BNA*	18,000	13,200	15.5	12.5	570	202349082
	CAPFA1818*6A*+TXV	A*EC960403ANA*	18,000	13,200	15.5	12.5	615	202349088
	CAPFA1818*6A*+TXV	A*EC960403BNA*	18,000	13,200	15.5	12.5	590	202349094
	CAPFA1818*6A*+TXV	A*EC960603ANA*	18,000	13,200	15.5	12.5	580	202349100
	CAPFA1818*6A*+TXV	A*EC960603BNA*	18,000	13,200	15.5	12.5	510	202349106
	CAPFA1818*6A*+TXV	A*EC960803BNA*	18,000	13,200	15.5	12.5	545	202349112
	CAPFA1818*6A*+TXV	A*VC80603B*B*	18,000	13,200	15.5	12.5	610	202349118
	CAPFA1818*6A*+TXV	A*VC80603B*C*	18,000	13,200	15.5	12.5	610	202349135
	CAPFA1818*6A*+TXV	A*VC80604B*B*	18,000	13,200	15.5	12.5	620	202349124
	CAPFA1818*6A*+TXV	A*VC80604B*C*	18,000	13,200	15.5	12.5	620	202349141
	CAPFA1818*6A*+TXV	A*VC80803B*B*	18,000	13,200	15.5	12.5	610	202349129
	CAPFA1818*6A*+TXV	A*VC80803B*C*	18,000	13,200	15.5	12.5	610	202349147
	CAPFA1818*6A*+TXV	A*VC960403BNB*	18,000	13,200	15.5	12.5	615	202349152
	CAPFA1818*6A*+TXV	A*VC960603BNB*	18,000	13,200	15.5	12.5	625	202349158
	CAPFA1818*6A*+TXV	A*VC960803BNB*	18,000	13,200	15.5	12.5	620	202349164
	CAPFA1818*6A*+TXV	A*VM970603BNA*	18,000	13,200	15.5	12.5	620	202349170
	CAPFA1818*6A*+TXV	A*VM970803BNA*	18,000	13,200	15.5	12.5	630	202349176
	CAPT3743*4A*	A*EC960302BNA*	17,800	13,000	15	12.5	565	202348510
CAPT3743*4A*	A*EC960402BNA*	17,800	13,000	15	12.5	570	202348532	
CAPT3743*4A*	A*EC960403BNA*	17,800	13,000	15	12.5	590	202348553	
CAPT3743*4A*	A*EC960603BNA*	17,800	13,000	15	12.5	510	202348574	
CAPT3743*4A*	A*EC960803BNA*	17,800	13,000	15	12.5	545	202348586	
CAPT3743*4A*	A*VC80603B*B*	17,800	13,000	15	12.5	610	202348598	
CAPT3743*4A*	A*VC80603B*C*	17,800	13,000	15	12.5	610	202348635	
CAPT3743*4A*	A*VC80604B*B*	17,800	13,000	15	12.5	620	202348610	
CAPT3743*4A*	A*VC80604B*C*	17,800	13,000	15	12.5	620	202348647	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0181L* (Contd.)	CAPT3743*4A*	A*VC80803B*B*	17,800	13,000	15	12.5	610	202348623
	CAPT3743*4A*	A*VC80803B*C*	17,800	13,000	15	12.5	610	202348659
	CAPT3743*4A*	A*VC960403BNB*	17,800	13,000	15	12.5	615	202348672
	CAPT3743*4A*	A*VC960603BNB*	17,800	13,000	15	12.5	625	202348684
	CAPT3743*4A*	A*VC960803BNB*	17,800	13,000	15	12.5	620	202348696
	CAPT3743*4A*	A*VM970603BNA*	17,800	13,000	15	12.5	620	202348708
	CAPT3743*4A*	A*VM970803BNA*	17,800	13,000	15	12.5	630	202348720
	CAPT3743*4A*+EEP		17,800	13,000	14	12.2	550	202348483
	CAPT3743*4A*+MBVC1200**-1A*		17,800	13,000	15	12.5	595	202348734
	CHPF2430B6C*	A*EC960302BNA*	17,400	12,600	14	12	565	202348511
	CHPF2430B6C*	A*EC960303ANA*	17,400	12,600	14	12	650	202349078
	CHPF2430B6C*	A*EC960402BNA*	17,400	12,600	14	12	570	202349083
	CHPF2430B6C*	A*EC960403ANA*	17,400	12,600	14	12	615	202349089
	CHPF2430B6C*	A*EC960403BNA*	17,400	12,600	14	12	590	202349095
	CHPF2430B6C*	A*EC960603ANA*	17,400	12,600	14	12	580	202349101
	CHPF2430B6C*	A*EC960603BNA*	17,400	12,600	14	12	510	202349107
	CHPF2430B6C*	A*EC960803BNA*	17,400	12,600	14	12	545	202349113
	CHPF2430B6C*	A*VC80603B*B*	17,600	12,800	14	12.2	610	202349119
	CHPF2430B6C*	A*VC80603B*C*	17,600	12,800	14	12.2	610	202349136
	CHPF2430B6C*	A*VC80604B*B*	17,600	12,800	14	12.2	620	202348611
	CHPF2430B6C*	A*VC80604B*C*	17,600	12,800	14	12.2	620	202349142
	CHPF2430B6C*	A*VC80803B*B*	17,600	12,800	14	12.2	610	202349130
	CHPF2430B6C*	A*VC80803B*C*	17,600	12,800	14	12.2	610	202349148
	CHPF2430B6C*	A*VC960403BNB*	17,600	12,800	14	12.2	615	202349153
	CHPF2430B6C*	A*VC960603BNB*	17,600	12,800	14	12.2	625	202349159
	CHPF2430B6C*	A*VC960803BNB*	17,600	12,800	14	12.2	620	202349165
	CHPF2430B6C*	A*VM970603BNA*	17,600	12,800	14	12.2	620	202349171
	CHPF2430B6C*	A*VM970803BNA*	17,600	12,800	14	12.2	630	202348721
	CHPF2430B6C*+EEP+TXV		17,400	12,600	14	11.5	600	202348484
	CHPF2430B6C*+MBVC1200**-1A*		17,800	13,000	14	12.2	595	202348735
	CHPF2430B6C*+MBVC1200**-1A*+TXV		17,800	13,000	14.5	12.2	595	202348736
	CHPF2430B6C*+TXV	A*EC960302BNA*	17,400	12,600	14.5	12	565	202349072
	CHPF2430B6C*+TXV	A*EC960303ANA*	17,400	12,600	14.5	12	650	202349079
	CHPF2430B6C*+TXV	A*EC960402BNA*	17,400	12,600	14.5	12	570	202349084
	CHPF2430B6C*+TXV	A*EC960403ANA*	17,400	12,600	14.5	12	615	202349090
	CHPF2430B6C*+TXV	A*EC960403BNA*	17,400	12,600	14.5	12	590	202349096
	CHPF2430B6C*+TXV	A*EC960603ANA*	17,400	12,600	14.5	12	580	202349102
	CHPF2430B6C*+TXV	A*EC960603BNA*	17,400	12,600	14.5	12	510	202349108
	CHPF2430B6C*+TXV	A*EC960803BNA*	17,400	12,600	14.5	12	545	202349114
	CHPF2430B6C*+TXV	A*VC80603B*B*	17,600	12,800	14.5	12.2	610	202349120
	CHPF2430B6C*+TXV	A*VC80603B*C*	17,600	12,800	14.5	12.2	610	202349137
	CHPF2430B6C*+TXV	A*VC80604B*B*	17,600	12,800	14.5	12.2	620	202349125
	CHPF2430B6C*+TXV	A*VC80604B*C*	17,600	12,800	14.5	12.2	620	202349143
	CHPF2430B6C*+TXV	A*VC80803B*B*	17,600	12,800	14.5	12.2	610	202349131
	CHPF2430B6C*+TXV	A*VC80803B*C*	17,600	12,800	14.5	12.2	610	202349149
	CHPF2430B6C*+TXV	A*VC960403BNB*	17,600	12,800	14.5	12.2	615	202349154
	CHPF2430B6C*+TXV	A*VC960603BNB*	17,600	12,800	14.5	12.2	625	202349160
	CHPF2430B6C*+TXV	A*VC960803BNB*	17,600	12,800	14.5	12.2	620	202349166
	CHPF2430B6C*+TXV	A*VM970603BNA*	17,600	12,800	14.5	12.2	620	202349172
	CHPF2430B6C*+TXV	A*VM970803BNA*	17,600	12,800	14.5	12.2	630	202349177
CHPF3636B6C*	A*EC960302BNA*	17,800	13,000	14.5	12.5	565	202348512	
CHPF3636B6C*	A*EC960303ANA*	17,800	13,000	14.5	12.5	650	202348520	
CHPF3636B6C*	A*EC960402BNA*	17,800	13,000	14.5	12.5	570	202348533	
CHPF3636B6C*	A*EC960403ANA*	17,800	13,000	14.5	12.5	615	202348542	
CHPF3636B6C*	A*EC960403BNA*	17,800	13,000	14.5	12.5	590	202348554	
CHPF3636B6C*	A*EC960603ANA*	17,800	13,000	14.5	12.5	580	202348563	
CHPF3636B6C*	A*EC960603BNA*	17,800	13,000	14.5	12.5	510	202348575	
CHPF3636B6C*	A*EC960803BNA*	17,800	13,000	14.5	12.5	545	202348587	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0181L* (Contd.)	CHPF3636B6C*	A*VC80603B*B*	17,800	13,000	14.5	12.5	610	202348599
	CHPF3636B6C*	A*VC80603B*C*	17,800	13,000	14.5	12.5	610	202348636
	CHPF3636B6C*	A*VC80604B*B*	17,800	13,000	14.5	12.5	620	202348612
	CHPF3636B6C*	A*VC80604B*C*	17,800	13,000	14.5	12.5	620	202348648
	CHPF3636B6C*	A*VC80803B*B*	17,800	13,000	14.5	12.5	610	202348624
	CHPF3636B6C*	A*VC80803B*C*	17,800	13,000	14.5	12.5	610	202348660
	CHPF3636B6C*	A*VC960403BNB*	17,800	13,000	14.5	12.5	615	202348673
	CHPF3636B6C*	A*VC960603BNB*	17,800	13,000	14.5	12.5	625	202348685
	CHPF3636B6C*	A*VC960803BNB*	17,800	13,000	14.5	12.5	620	202348697
	CHPF3636B6C*	A*VM970603BNA*	17,800	13,000	14.5	12.5	620	202348709
	CHPF3636B6C*	A*VM970803BNA*	17,800	13,000	14.5	12.5	630	202348722
	CHPF3636B6C*+EEP		17,800	13,000	14	12.2	600	202348485
	CHPF3636B6C*+EEP+TXV		17,800	13,000	14.5	12.2	600	202348486
	CHPF3636B6C*+MBVC1200**-1A*		18,000	13,200	14.5	12.5	595	202348737
	CHPF3636B6C*+MBVC1200**-1A*+TXV		18,000	13,200	15	12.5	595	202348738
	CHPF3636B6C*+TXV	A*EC960302BNA*	17,800	13,000	15	12.5	565	202348513
	CHPF3636B6C*+TXV	A*EC960303ANA*	17,800	13,000	15	12.5	650	202348521
	CHPF3636B6C*+TXV	A*EC960402BNA*	17,800	13,000	15	12.5	570	202348534
	CHPF3636B6C*+TXV	A*EC960403ANA*	17,800	13,000	15	12.5	615	202348543
	CHPF3636B6C*+TXV	A*EC960403BNA*	17,800	13,000	15	12.5	590	202348555
	CHPF3636B6C*+TXV	A*EC960603ANA*	17,800	13,000	15	12.5	580	202348564
	CHPF3636B6C*+TXV	A*EC960603BNA*	17,800	13,000	15	12.5	510	202348576
	CHPF3636B6C*+TXV	A*EC960803BNA*	17,800	13,000	15	12.5	545	202348588
	CHPF3636B6C*+TXV	A*VC80603B*B*	17,800	13,000	15	12.5	610	202348600
	CHPF3636B6C*+TXV	A*VC80603B*C*	17,800	13,000	15	12.5	610	202348637
	CHPF3636B6C*+TXV	A*VC80604B*B*	17,800	13,000	15	12.5	620	202348613
	CHPF3636B6C*+TXV	A*VC80604B*C*	17,800	13,000	15	12.5	620	202348649
	CHPF3636B6C*+TXV	A*VC80803B*B*	17,800	13,000	15	12.5	610	202348625
	CHPF3636B6C*+TXV	A*VC80803B*C*	17,800	13,000	15	12.5	610	202348661
	CHPF3636B6C*+TXV	A*VC960403BNB*	17,800	13,000	15	12.5	615	202348674
	CHPF3636B6C*+TXV	A*VC960603BNB*	17,800	13,000	15	12.5	625	202348686
	CHPF3636B6C*+TXV	A*VC960803BNB*	17,800	13,000	15	12.5	620	202348698
	CHPF3636B6C*+TXV	A*VM970603BNA*	17,800	13,000	15	12.5	620	202348710
	CHPF3636B6C*+TXV	A*VM970803BNA*	17,800	13,000	15	12.5	630	202348723
	CSCF1824N6D*+MBVC1200**-1A*		17,200	12,600	14	12	595	202349181
	CSCF1824N6D*+MBVC1200**-1A*+TXV		17,200	12,600	14.5	12	595	202348739
	CSCF1824N6D*+TXV	A*EC960302BNA*	16,400	12,000	14	12	565	202349073
	CSCF1824N6D*+TXV	A*EC960303ANA*	16,800	12,200	14	12	650	202348522
	CSCF1824N6D*+TXV	A*EC960402BNA*	16,800	12,200	14	12	570	202349085
	CSCF1824N6D*+TXV	A*EC960403ANA*	17,000	12,400	14	12	615	202349091
	CSCF1824N6D*+TXV	A*EC960403BNA*	16,800	12,200	14	12	590	202349097
	CSCF1824N6D*+TXV	A*EC960603ANA*	16,400	12,000	14	12	580	202349103
	CSCF1824N6D*+TXV	A*EC960603BNA*	16,400	12,000	14	12	510	202349109
	CSCF1824N6D*+TXV	A*EC960803BNA*	16,800	12,200	14	12	545	202349115
	CSCF1824N6D*+TXV	A*VC80603B*B*	17,000	12,400	14	12	610	202348601
	CSCF1824N6D*+TXV	A*VC80603B*C*	17,000	12,400	14	12	610	202349138
	CSCF1824N6D*+TXV	A*VC80604B*B*	17,000	12,400	14	12	620	202349126
	CSCF1824N6D*+TXV	A*VC80604B*C*	17,000	12,400	14	12	620	202349144
	CSCF1824N6D*+TXV	A*VC80803B*B*	17,000	12,400	14	12	610	202349132
	CSCF1824N6D*+TXV	A*VC80803B*C*	17,000	12,400	14	12	610	202348662
CSCF1824N6D*+TXV	A*VC960403BNB*	17,000	12,400	14	12	615	202349155	
CSCF1824N6D*+TXV	A*VC960603BNB*	17,000	12,400	14	12	625	202349161	
CSCF1824N6D*+TXV	A*VC960803BNB*	17,000	12,400	14	12	620	202349167	
CSCF1824N6D*+TXV	A*VM970603BNA*	17,000	12,400	14	12	620	202348711	
CSCF1824N6D*+TXV	A*VM970803BNA*	17,000	12,400	14	12	630	202349178	
CSCF3036N6D*	A*EC960302BNA*	17,400	12,600	14	12	565	202349074	
CSCF3036N6D*	A*EC960303ANA*	17,200	12,600	14	12	650	202349080	
CSCF3036N6D*	A*EC960402BNA*	17,400	12,600	14	12	570	202349086	



OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0181L* (Contd.)	CSCF3036N6D*	A*EC960403ANA*	17,200	12,600	14	12	615	202349092
	CSCF3036N6D*	A*EC960403BNA*	17,400	12,600	14	12	590	202349098
	CSCF3036N6D*	A*EC960603ANA*	17,200	12,600	14	12	580	202349104
	CSCF3036N6D*	A*EC960603BNA*	17,400	12,600	14	12	510	202349110
	CSCF3036N6D*	A*EC960803BNA*	17,400	12,600	14	12	545	202349116
	CSCF3036N6D*	A*VC80603B*B*	17,800	13,000	14.5	12.2	610	202349121
	CSCF3036N6D*	A*VC80603B*C*	17,800	13,000	14.5	12.2	610	202349139
	CSCF3036N6D*	A*VC80604B*B*	17,800	13,000	14.5	12.2	620	202349127
	CSCF3036N6D*	A*VC80604B*C*	17,800	13,000	14.5	12.2	620	202349145
	CSCF3036N6D*	A*VC80803B*B*	17,800	13,000	14.5	12.2	610	202349133
	CSCF3036N6D*	A*VC80803B*C*	17,800	13,000	14.5	12.2	610	202349150
	CSCF3036N6D*	A*VC960403BNB*	17,800	13,000	14.5	12.2	615	202349156
	CSCF3036N6D*	A*VC960603BNB*	17,800	13,000	14.5	12.2	625	202349162
	CSCF3036N6D*	A*VC960803BNB*	17,800	13,000	14.5	12.2	620	202349168
	CSCF3036N6D*	A*VM970603BNA*	17,800	13,000	14.5	12.2	620	202349173
	CSCF3036N6D*	A*VM970803BNA*	17,800	13,000	14.5	12.2	630	202349179
	CSCF3036N6D*+EEP+TXV		17,600	12,800	14	11.5	600	202348487
	CSCF3036N6D*+MBVC1200**-1A*		17,800	13,000	14.5	12.5	595	202349182
	CSCF3036N6D*+MBVC1200**-1A*+TXV		17,800	13,000	15	12.5	595	202348740
	CSCF3036N6D*+TXV	A*EC960302BNA*	17,600	12,800	14.5	12.2	565	202349075
	CSCF3036N6D*+TXV	A*EC960303ANA*	17,400	12,600	14.5	12.2	650	202349081
	CSCF3036N6D*+TXV	A*EC960402BNA*	17,600	12,800	14.5	12.2	570	202349087
	CSCF3036N6D*+TXV	A*EC960403ANA*	17,400	12,600	14.5	12.2	615	202349093
	CSCF3036N6D*+TXV	A*EC960403BNA*	17,600	12,800	14.5	12.2	590	202349099
	CSCF3036N6D*+TXV	A*EC960603ANA*	17,400	12,600	14.5	12.2	580	202349105
	CSCF3036N6D*+TXV	A*EC960603BNA*	17,400	12,600	14.5	12.2	510	202349111
	CSCF3036N6D*+TXV	A*EC960803BNA*	17,400	12,600	14.5	12.2	545	202349117
	CSCF3036N6D*+TXV	A*VC80603B*B*	17,800	13,000	15	12.5	610	202349122
	CSCF3036N6D*+TXV	A*VC80603B*C*	17,800	13,000	15	12.5	610	202349140
	CSCF3036N6D*+TXV	A*VC80604B*B*	17,800	13,000	15	12.5	620	202349128
	CSCF3036N6D*+TXV	A*VC80604B*C*	17,800	13,000	15	12.5	620	202349146
	CSCF3036N6D*+TXV	A*VC80803B*B*	17,800	13,000	15	12.5	610	202349134
	CSCF3036N6D*+TXV	A*VC80803B*C*	17,800	13,000	15	12.5	610	202349151
	CSCF3036N6D*+TXV	A*VC960403BNB*	17,800	13,000	15	12.5	615	202349157
	CSCF3036N6D*+TXV	A*VC960603BNB*	17,800	13,000	15	12.5	625	202349163
	CSCF3036N6D*+TXV	A*VC960803BNB*	17,800	13,000	15	12.5	620	202349169
	CSCF3036N6D*+TXV	A*VM970603BNA*	17,800	13,000	15	12.5	620	202349174
	CSCF3036N6D*+TXV	A*VM970803BNA*	17,800	13,000	15	12.5	630	202349180
	CSCF3642N6D*	A*EC960302BNA*	17,800	13,000	14.5	12.5	565	202348514
	CSCF3642N6D*	A*EC960303ANA*	17,800	13,000	14.5	12.5	650	202348523
	CSCF3642N6D*	A*EC960402BNA*	17,800	13,000	14.5	12.5	570	202348535
	CSCF3642N6D*	A*EC960403ANA*	17,800	13,000	14.5	12.5	615	202348544
	CSCF3642N6D*	A*EC960403BNA*	17,800	13,000	14.5	12.5	590	202348556
	CSCF3642N6D*	A*EC960603ANA*	17,800	13,000	14.5	12.5	580	202348565
	CSCF3642N6D*	A*EC960603BNA*	17,800	13,000	14.5	12.5	510	202348577
	CSCF3642N6D*	A*EC960803BNA*	17,800	13,000	14.5	12.5	545	202348589
	CSCF3642N6D*	A*VC80603B*B*	18,000	13,200	14.5	12.5	610	202348602
	CSCF3642N6D*	A*VC80603B*C*	18,000	13,200	14.5	12.5	610	202348638
	CSCF3642N6D*	A*VC80604B*B*	18,000	13,200	14.5	12.5	620	202348614
	CSCF3642N6D*	A*VC80604B*C*	18,000	13,200	14.5	12.5	620	202348650
CSCF3642N6D*	A*VC80803B*B*	18,000	13,200	14.5	12.5	610	202348626	
CSCF3642N6D*	A*VC80803B*C*	18,000	13,200	14.5	12.5	610	202348663	
CSCF3642N6D*	A*VC960403BNB*	18,000	13,200	14.5	12.5	615	202348675	
CSCF3642N6D*	A*VC960603BNB*	18,000	13,200	14.5	12.5	625	202348687	
CSCF3642N6D*	A*VC960803BNB*	18,000	13,200	14.5	12.5	620	202348699	
CSCF3642N6D*	A*VM970603BNA*	18,000	13,200	14.5	12.5	620	202348712	
CSCF3642N6D*	A*VM970803BNA*	18,000	13,200	14.5	12.5	630	202348724	
CSCF3642N6D*+EEP		17,800	13,000	14	12.2	600	202348488	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0181L* (Contd.)	CSCF3642N6D*+EEP+TXV		17,800	13,000	14.5	12.2	600	202348489
	CSCF3642N6D*+MBVC1200**-1A*		18,000	13,200	15	12.5	595	202348741
	CSCF3642N6D*+MBVC1200**-1A*+TXV		18,000	13,200	15.5	12.5	595	202348742
	CSCF3642N6D*+TXV	A*EC960302BNA*	17,800	13,000	15	12.5	565	202348515
	CSCF3642N6D*+TXV	A*EC960303ANA*	17,800	13,000	15	12.5	650	202348524
	CSCF3642N6D*+TXV	A*EC960402BNA*	17,800	13,000	15	12.5	570	202348536
	CSCF3642N6D*+TXV	A*EC960403ANA*	17,800	13,000	15	12.5	615	202348545
	CSCF3642N6D*+TXV	A*EC960403BNA*	17,800	13,000	15	12.5	590	202348557
	CSCF3642N6D*+TXV	A*EC960603ANA*	17,800	13,000	15	12.5	580	202348566
	CSCF3642N6D*+TXV	A*EC960603BNA*	17,800	13,000	15	12.5	510	202348578
	CSCF3642N6D*+TXV	A*EC960803BNA*	17,800	13,000	15	12.5	545	202348590
	CSCF3642N6D*+TXV	A*VC80603B*B*	18,000	13,200	15	12.5	610	202348603
	CSCF3642N6D*+TXV	A*VC80603B*C*	18,000	13,200	15	12.5	610	202348639
	CSCF3642N6D*+TXV	A*VC80604B*B*	18,000	13,200	15	12.5	620	202348615
	CSCF3642N6D*+TXV	A*VC80604B*C*	18,000	13,200	15	12.5	620	202348651
	CSCF3642N6D*+TXV	A*VC80803B*B*	18,000	13,200	15	12.5	610	202348627
	CSCF3642N6D*+TXV	A*VC80803B*C*	18,000	13,200	15	12.5	610	202348664
	CSCF3642N6D*+TXV	A*VC960403BNB*	18,000	13,200	15	12.5	615	202348676
	CSCF3642N6D*+TXV	A*VC960603BNB*	18,000	13,200	15	12.5	625	202348688
	CSCF3642N6D*+TXV	A*VC960803BNB*	18,000	13,200	15	12.5	620	202348700
CSCF3642N6D*+TXV	A*VM970603BNA*	18,000	13,200	15	12.5	620	202348713	
CSCF3642N6D*+TXV	A*VM970803BNA*	18,000	13,200	15	12.5	630	202348725	
ASX14 0191K*	ACNF25XX16A*		17,400	12,800	14.0	12.2	610	8740696
	ARUF25B14A*		17,800	13,100	14.0	12.2	570	7989009
	ASPT25B14A*		17,800	13,100	14.5	12.2	580	8245616
	ASPT29B14A*		18,000	13,300	15.0	12.5	560	8245617
	ASPT30C14A*		18,000	13,300	15.0	12.5	600	7546467
	ASPT33C14B*		18,000	13,300	15.0	12.5	615	201834856
	AVPTC24B14A*		17,800	13,100	14.5	12.2	600	7546468
	AVPTC25B14A*		17,800	13,100	14.5	12.2	640	8996352
	AVPTC29B14A*		18,000	13,300	15.0	12.5	585	8996353
	AVPTC30C14A*		18,200	13,400	15.0	12.5	615	7546469
	AVPTC33C14A*		18,200	13,400	15.0	12.5	645	10221069
	AWUF19XX16A*		17,000	12,600	14.0	12.2	600	8390332
	AWUF31XX16A*		17,200	12,700	15.0	12.5	550	7546470
	AWUF32XX16A*		17,200	12,700	15.0	12.5	550	7546471
	CA*F3636*6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7546472
	CA*F3636*6D*+MBVC1200**-1A*+TXV		18,000	13,300	15.0	12.5	600	7546473
	CA*F3636*6D*+TXV	A*EC960303ANA*	17,400	12,200	15.0	12.5	650	10516264
	CA*F3636*6D*+TXV	A*EC960403ANA*	17,400	12,200	15.0	12.5	610	10516267
	CA*F3636*6D*+TXV	A*EC960603ANA*	17,800	12,500	15.0	12.5	580	10516261
	CA*F3636*6D*+TXV	A*EC960403BNA*	17,400	12,200	15.0	12.5	625	10338583
	CA*F3636*6D*+TXV	A*VC80603B*B*	17,800	13,500	15.0	12.5	550	9947394
	CA*F3636*6D*+TXV	A*VC80803B*B*	17,800	13,500	15.0	12.5	600	9947398
	CA*F3636*6D*+TXV	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546487
	CA*F3636*6D*+TXV	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546523
	CA*F3636*6D*+TXV	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546559
	CA*F3636*6D*+TXV	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546503
	CA*F3636*6D*+TXV	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546543
	CA*F3636*6D*+TXV	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546511
	CA*F3636*6D*+TXV	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546527
	CA*F3636*6D*+TXV	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546551
	CA*F3636*6D*+TXV	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546535
	CA*F3636*6D*+TXV	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546519
CA*F3636*6D*+TXV	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546499	
CA*F3636*6D*+TXV	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546531	
CA*F3636*6D*+TXV	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546515	
CA*F3636*6D*+TXV	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546555	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0191K* (Contd.)	CA*F3636*6D*+TXV	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546507
	CA*F3636*6D*+TXV	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546483
	CA*F3636*6D*+TXV	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546495
	CA*F3636*6D*+TXV	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546547
	CA*F3636*6D*+TXV	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546491
	CA*F3636*6D*+TXV	G*E80603B*B*	17,800	13,100	15.0	12.5	600	7546480
	CA*F3636*6D*+TXV	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546539
	CA*F3743*6D*+EEP+TXV		18,000	13,300	14.5	12.2	550	7546474
	CAPT3743*4A*	A*EC960403BNA*	17,600	12,400	15.0	12.5	625	10338584
	CAPT3743*4A*	A*VC80603B*B*	17,800	13,500	15.0	12.5	550	9947395
	CAPT3743*4A*	A*VC80803B*B*	17,800	13,500	15.0	12.5	600	9947399
	CAPT3743*4A*	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546492
	CAPT3743*4A*	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546512
	CAPT3743*4A*	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546500
	CAPT3743*4A*	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546560
	CAPT3743*4A*	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546552
	CAPT3743*4A*	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546508
	CAPT3743*4A*	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546544
	CAPT3743*4A*	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546548
	CAPT3743*4A*	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546556
	CAPT3743*4A*	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546516
	CAPT3743*4A*	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546496
	CAPT3743*4A*	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546536
	CAPT3743*4A*	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546524
	CAPT3743*4A*	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546528
	CAPT3743*4A*	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546532
	CAPT3743*4A*	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546484
	CAPT3743*4A*	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546504
	CAPT3743*4A*	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546488
	CAPT3743*4A*	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546540
	CAPT3743*4A*	G*E80603B*B*	17,800	13,100	15.0	12.5	600	7546481
	CAPT3743*4A*	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546520
	CAPT3743*4A*+EEP		17,600	13,000	14.0	12.2	550	7546475
	CAPT3743*4A*+MBVC1200*-1A*		17,800	13,100	15.0	12.5	600	7546476
	CHPF3636B6C*+EEP+TXV		17,600	13,000	14.5	12.2	550	7546477
	CHPF3636B6C*+MBVC1200*-1A*+TXV		18,200	13,400	15.0	12.5	600	7546478
	CHPF3636B6C*+TXV	A*EC960303ANA*	17,800	12,500	15.0	12.5	650	10516265
	CHPF3636B6C*+TXV	A*EC960403ANA*	17,400	12,200	15.0	12.5	610	10516268
	CHPF3636B6C*+TXV	A*EC960603ANA*	17,800	12,500	15.0	12.5	580	10516262
	CHPF3636B6C*+TXV	A*EC960403BNA*	17,400	12,200	15.0	12.5	600	10338585
	CHPF3636B6C*+TXV	A*VC80603B*B*	17,800	13,500	15.0	12.5	550	9947396
	CHPF3636B6C*+TXV	A*VC80803B*B*	17,800	13,500	15.0	12.5	600	9947400
	CHPF3636B6C*+TXV	G*E80603B*B*	17,800	13,100	15.0	12.5	600	7546482
	CHPF3636B6C*+TXV	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546561
	CHPF3636B6C*+TXV	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546553
	CHPF3636B6C*+TXV	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546545
	CHPF3636B6C*+TXV	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546525
	CHPF3636B6C*+TXV	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546513
CHPF3636B6C*+TXV	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546509	
CHPF3636B6C*+TXV	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546517	
CHPF3636B6C*+TXV	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546557	
CHPF3636B6C*+TXV	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546537	
CHPF3636B6C*+TXV	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546533	
CHPF3636B6C*+TXV	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546489	
CHPF3636B6C*+TXV	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546497	
CHPF3636B6C*+TXV	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546521	
CHPF3636B6C*+TXV	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546541	
CHPF3636B6C*+TXV	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546549	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0191K* (Contd.)	CHPF3636B6C*+TXV	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546501
	CHPF3636B6C*+TXV	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546505
	CHPF3636B6C*+TXV	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546485
	CHPF3636B6C*+TXV	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546493
	CHPF3636B6C*+TXV	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546529
	CSCF1824N6D*+TXV	A*EC960303ANA*	16,800	11,800	14.0	12.2	630	10516266
	CSCF1824N6D*+TXV	A*EC960403ANA*	16,800	11,800	14.5	12.2	610	10516269
	CSCF3036N6D*+EEP+TXV		17,600	13,000	14.0	12.2	550	7546479
	CSCF3036N6D*+TXV	A*VC80603B*B*	17,800	13,500	15.0	12.5	550	9947397
	CSCF3036N6D*+TXV	A*VC80803B*B*	17,800	13,500	15.0	12.5	600	9947401
	CSCF3036N6D*+TXV	A*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546490
	CSCF3036N6D*+TXV	A*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546510
	CSCF3036N6D*+TXV	G*VC80604B*B*	17,800	13,100	15.0	12.5	620	7546486
	CSCF3036N6D*+TXV	G*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546502
	CSCF3036N6D*+TXV	A*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546530
	CSCF3036N6D*+TXV	G*VM970804CNA*	17,800	13,100	15.0	12.5	620	7546522
	CSCF3036N6D*+TXV	G*VC960603BNA*	17,800	13,100	15.0	12.5	625	7546498
	CSCF3036N6D*+TXV	A*VC960803BNA*	17,800	13,100	15.0	12.5	620	7546514
	CSCF3036N6D*+TXV	G*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546494
	CSCF3036N6D*+TXV	A*VC960403BNA*	17,800	13,100	15.0	12.5	615	7546506
	CSCF3036N6D*+TXV	A*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546526
	CSCF3036N6D*+TXV	G*VM970603BNA*	17,800	13,100	15.0	12.5	625	7546518
	CSCF3642N6D*+TXV	A*EC960403BNA*	18,000	12,700	15.0	12.5	625	10338586
	CSCF3642N6D*+TXV	A*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546562
	CSCF3642N6D*+TXV	A*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546554
	CSCF3642N6D*+TXV	G*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546542
	CSCF3642N6D*+TXV	A*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546550
	CSCF3642N6D*+TXV	G*EC960302BNA*	17,800	13,100	15.0	12.5	575	7546534
	CSCF3642N6D*+TXV	G*EC960803BNA*	17,800	13,100	15.0	12.5	540	7546546
	CSCF3642N6D*+TXV	G*EC960402BNA*	17,800	13,100	15.0	12.5	575	7546538
	CSCF3642N6D*+TXV	A*EC960603BNA*	17,800	13,100	15.0	12.5	500	7546558
	CAPFA1818*6A*+EEP		18,000	12,700	12.2	14.5	650	201954190
	CAPFA1818*6A*+EEP+TXV		18,000	12,700	12.2	14.5	650	201954191
	CAPFA1818*6A*+MBVC1200**-1A*		18,000	12,700	12.5	15.5	600	201954192
	CAPFA1818*6A*+MBVC1200**-1A*+TXV		18,000	12,700	12.5	15.5	600	201954193
	CAPFA1818*6A*	A*EC960302BNA*	18,000	12,700	12.5	15.5	560	201954194
	CAPFA1818*6A*+TXV	A*EC960302BNA*	18,000	12,700	12.5	15.5	560	201954195
	CAPFA1818*6A*	A*EC960303ANA*	18,000	12,700	12.5	15.5	650	201954196
	CAPFA1818*6A*+TXV	A*EC960303ANA*	18,000	12,700	12.5	15.5	650	201954197
	CAPFA1818*6A*	A*EC960403ANA*	18,000	12,700	12.5	15.5	650	201954198
	CAPFA1818*6A*+TXV	A*EC960403ANA*	18,000	12,700	12.5	15.5	650	201954199
	CAPFA1818*6A*	A*EC960403BNA*	18,000	12,700	12.5	15.5	620	201954200
	CAPFA1818*6A*+TXV	A*EC960403BNA*	18,000	12,700	12.5	15.5	620	201954201
	CAPFA1818*6A*	A*EC960402BNA*	18,000	12,700	12.5	15.5	570	201954202
	CAPFA1818*6A*+TXV	A*EC960402BNA*	18,000	12,700	12.5	15.5	570	201954203
CAPFA1818*6A*	A*EC960603BNA*	17,800	12,500	12.5	15.5	500	201954204	
CAPFA1818*6A*+TXV	A*EC960603BNA*	18,000	12,700	12.5	15.5	500	201954205	
CAPFA1818*6A*	A*EC960603ANA*	18,000	12,700	12.5	15.5	580	201954206	
CAPFA1818*6A*+TXV	A*EC960603ANA*	18,000	12,700	12.5	15.5	580	201954207	
CAPFA1818*6A*	A*EC960803BNA*	18,000	12,700	12.5	15.5	520	201954208	
CAPFA1818*6A*+TXV	A*EC960803BNA*	18,000	12,700	12.5	15.5	520	201954209	
CAPFA1818*6A*	A*EH800603B*A*	18,000	12,700	12.5	15.5	600	201954210	
CAPFA1818*6A*+TXV	A*EH800603B*A*	18,000	12,700	12.5	15.5	600	201954211	
CAPFA1818*6A*	A*VC80603B*C*	18,000	12,700	12.5	15.5	550	201954212	
CAPFA1818*6A*+TXV	A*VC80603B*C*	18,000	12,700	12.5	15.5	550	201954213	
CAPFA1818*6A*	A*VC80604B*C*	18,000	12,700	12.5	15.5	620	201954214	
CAPFA1818*6A*+TXV	A*VC80604B*C*	18,000	12,700	12.5	15.5	620	201954215	
CAPFA1818*6A*	A*VC80803B*C*	18,000	12,700	12.5	15.5	600	201954216	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0191K* (Contd.)	CAPFA1818*6A*+TXV	A*VC80803B*C*	18,000	12,700	12.5	15.5	600	201954217
	CAPFA1818*6A*	A*VC960403BNB*	18,000	12,700	12.5	15.5	615	201954218
	CAPFA1818*6A*+TXV	A*VC960403BNB*	18,000	12,700	12.5	15.5	615	201954219
	CAPFA1818*6A*	A*VC960603BNB*	18,000	12,700	12.5	15.5	620	201954220
	CAPFA1818*6A*+TXV	A*VC960603BNB*	18,000	12,700	12.5	15.5	620	201954221
	CAPFA1818*6A*	A*VC960803BNB*	18,000	12,700	12.5	15.5	620	201954222
	CAPFA1818*6A*+TXV	A*VC960803BNB*	18,000	12,700	12.5	15.5	620	201954223
	CAPFA1818*6A*	A*VM970603BNA*	18,000	12,700	12.5	15.5	625	201954224
	CAPFA1818*6A*+TXV	A*VM970603BNA*	18,000	12,700	12.5	15.5	625	201954225
	ASX14 0241L*	ACNF25XX16A*		22,800	16,700	14.0	11.7	710
ARUF29B14A*			23,600	17,300	14.0	11.5	860	8712039
ARUF31B14A*			23,600	17,300	14.0	11.5	870	8712040
ASPT25B14A*			23,000	16,900	14.5	12.0	800	8712042
ASPT29B14A*			23,600	17,300	15.0	12.0	790	8712043
ASPT30C14A*			23,600	17,300	14.5	12.0	845	8712044
ASPT33C14B*+HSK			23,600	17,300	14.5	12.0	820	201834857
AVPTC24B14A*			23,000	16,900	14.0	11.5	795	8712045
AVPTC30C14A*			23,600	17,300	14.5	12.0	780	8712046
AVPTC33C14A*+HSK			23,600	17,300	14.5	12.0	785	10221070
AWUF25XX16A*			22,000	16,200	14.0	11.5	750	8712047
AWUF31XX16A*			23,000	16,900	14.5	11.5	800	8712048
AWUF32XX16A*			23,000	16,900	14.5	11.5	800	8712049
CA*F3137*6A*		A*EC960303ANA*	23,400	16,800	14.5	12.0	800	10516272
CA*F3137*6A*		A*EC960403ANA*	23,400	16,800	14.5	11.5	800	10516279
CA*F3137*6A*		A*EC960603ANA*	23,400	16,800	14.5	11.5	775	10516263
CA*F3137*6A*		A*EC960403BNA*	23,800	16,900	14.5	12.2	800	10338587
CA*F3137*6A*		A*VC80603B*B*	23,600	17,800	14.5	11.5	750	9947402
CA*F3137*6A*		A*VC80803B*B*	23,600	17,800	14.5	11.5	750	9947406
CA*F3137*6A*+TXV		A*EC960303ANA*	23,400	16,800	15.0	12.0	800	10516273
CA*F3137*6A*+TXV		A*EC960403ANA*	23,400	16,800	15.0	12.0	800	10516280
CA*F3137*6A*+TXV		A*EC960603ANA*	23,400	16,800	15.0	12.2	775	10516270
CA*F3137*6A*+TXV		A*EC960403BNA*	23,800	16,900	15.0	12.5	800	10338588
CA*F3137*6A*+TXV		A*VC80603B*B*	23,600	17,800	15.0	12.2	750	9948951
CA*F3137*6A*+TXV		A*VC80803B*B*	23,600	17,800	15.0	12.2	750	9948956
CA*F3636*6D*		A*EC960303ANA*	23,400	16,800	14.5	12.0	800	10516274
CA*F3636*6D*		A*EC960403ANA*	23,200	16,700	14.5	11.5	800	10516281
CA*F3636*6D*		A*EC960603ANA*	23,400	16,800	14.5	11.5	775	10516271
CA*F3636*6D*		A*EC960403BNA*	23,200	16,400	14.5	12.2	800	10338589
CA*F3636*6D*		A*VC80603B*B*	23,600	17,800	14.5	11.5	750	9947403
CA*F3636*6D*		A*VC80803B*B*	23,600	17,800	14.5	11.5	750	9947407
CA*F3636*6D*		A*VC80804C*B*	23,600	17,800	14.5	11.5	800	9947410
CA*F3636*6D*		A*VC80805D*B*	23,600	17,800	14.5	11.5	800	9947412
CA*F3636*6D*		A*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712062
CA*F3636*6D*		G*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712076
CA*F3636*6D*		G*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712068
CA*F3636*6D*		G*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712069
CA*F3636*6D*		A*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712051
CA*F3636*6D*		G*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712071
CA*F3636*6D*		A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712052
CA*F3636*6D*		A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712059
CA*F3636*6D*		A*VC960803BNA*	23,600	17,300	14.5	11.5	820	8712058
CA*F3636*6D*	G*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712073	
CA*F3636*6D*	G*E80603B*B*	23,600	17,300	14.5	11.5	725	8712063	
CA*F3636*6D*	G*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712074	
CA*F3636*6D*	G*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712075	
CA*F3636*6D*	G*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712064	
CA*F3636*6D*	G*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712067	
CA*F3636*6D*	A*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712060	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
	CA*F3636*6D*	A*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712050
	CA*F3636*6D*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712066
	CA*F3636*6D*	G*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712070
	CA*F3636*6D*	G*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712065
	CA*F3636*6D*	A*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712056
	CA*F3636*6D*	A*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712054
	CA*F3636*6D*	A*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712055
	CA*F3636*6D*	A*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712061
	CA*F3636*6D*	A*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712053
	CA*F3636*6D*	G*VC960803BNA*	23,600	17,300	14.5	11.5	820	8712072
	CA*F3636*6D*	A*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712057
	CA*F3636*6D*+EEP		23,600	17,300	14.0	11.5	725	8712077
	CA*F3636*6D*+EEP+TXV		23,600	17,300	14.0	11.5	725	8712078
	CA*F3636*6D*+MBVC1200**.-1A*		23,600	17,300	14.5	12.0	725	8712079
	CA*F3636*6D*+TXV	A*EC960303ANA*	23,400	16,800	14.5	12.0	800	10516275
	CA*F3636*6D*+TXV	A*EC960403ANA*	23,200	16,700	15.0	12.0	800	10516282
	CA*F3636*6D*+TXV	A*EC960603ANA*	23,400	16,800	14.5	11.5	750	10516286
	CA*F3636*6D*+TXV	A*EC960403BNA*	23,200	16,400	15.0	12.2	800	10338590
	CA*F3636*6D*+TXV	A*VC80603B*B*	23,600	17,800	14.5	11.5	750	9948952
	CA*F3636*6D*+TXV	A*VC80803B*B*	23,600	17,800	14.5	11.5	750	9948957
	CA*F3636*6D*+TXV	A*VC80804C*B*	23,600	17,800	14.5	11.5	800	9948961
	CA*F3636*6D*+TXV	A*VC80805D*B*	23,600	17,800	14.5	11.5	750	9948963
	CA*F3636*6D*+TXV	G*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712100
	CA*F3636*6D*+TXV	G*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712095
	CA*F3636*6D*+TXV	G*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712094
	CA*F3636*6D*+TXV	G*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712102
	CA*F3636*6D*+TXV	A*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712092
	CA*F3636*6D*+TXV	G*E80603B*B*	23,600	17,300	14.5	11.5	725	8712093
	CA*F3636*6D*+TXV	G*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712103
	CA*F3636*6D*+TXV	A*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712090
	CA*F3636*6D*+TXV	G*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712106
	CA*F3636*6D*+TXV	G*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712099
	CA*F3636*6D*+TXV	G*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712097
	CA*F3636*6D*+TXV	A*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712084
	CA*F3636*6D*+TXV	A*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712087
	CA*F3636*6D*+TXV	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712082
	CA*F3636*6D*+TXV	G*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712105
	CA*F3636*6D*+TXV	A*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712085
	CA*F3636*6D*+TXV	A*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712083
	CA*F3636*6D*+TXV	A*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712088
	CA*F3636*6D*+TXV	A*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712091
	CA*F3636*6D*+TXV	G*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712101
	CA*F3636*6D*+TXV	A*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712080
	CA*F3636*6D*+TXV	G*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712104
	CA*F3636*6D*+TXV	A*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712081
	CA*F3636*6D*+TXV	G*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712098
	CA*F3636*6D*+TXV	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712096
	CA*F3636*6D*+TXV	A*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712086
	CA*F3636*6D*+TXV	A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712089
	CA*F3642*6D*+EEP		23,600	17,300	14.0	11.5	725	8712107
	CA*F3743*6D*+EEP		23,600	17,300	14.0	11.5	725	8712108
	CA*F3743*6D*+EEP+TXV		23,600	17,300	14.5	12.0	725	8712109
	CAPT3743*4A*	A*VC80603B*B*	23,600	17,800	14.5	11.5	750	9948953
	CAPT3743*4A*	A*VC80803B*B*	23,600	17,800	14.5	11.5	750	9948958
	CAPT3743*4A*	A*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712114
	CAPT3743*4A*	A*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712115
	CAPT3743*4A*	A*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712122
	CAPT3743*4A*	G*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712129

ASX14  
0241L\*  
(Contd.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0241L* (Contd.)	CAPT3743*4A*	A*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712111
	CAPT3743*4A*	A*VM970803BNA*	23,400	17,200	14.5	11.5	800	8712121
	CAPT3743*4A*	A*VC960603BNA*	23,400	17,200	14.5	11.5	820	8712117
	CAPT3743*4A*	G*VC960403BNA*	23,400	17,200	14.5	11.5	805	8712130
	CAPT3743*4A*	A*VC960803BNA*	23,400	17,200	14.5	11.5	800	8712118
	CAPT3743*4A*	G*VC960603BNA*	23,400	17,200	14.5	11.5	820	8712131
	CAPT3743*4A*	G*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712124
	CAPT3743*4A*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712126
	CAPT3743*4A*	G*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712133
	CAPT3743*4A*	G*VM970603BNA*	23,400	17,200	14.5	11.5	820	8712134
	CAPT3743*4A*	G*VC960803BNA*	23,400	17,200	14.5	11.5	800	8712132
	CAPT3743*4A*	A*VM970603BNA*	23,400	17,200	14.5	11.5	820	8712120
	CAPT3743*4A*	A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712119
	CAPT3743*4A*	G*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712128
	CAPT3743*4A*	G*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712127
	CAPT3743*4A*	A*VC960403BNA*	23,400	17,200	14.5	11.5	805	8712116
	CAPT3743*4A*	G*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712136
	CAPT3743*4A*	G*VM970803BNA*	23,400	17,200	14.5	11.5	800	8712135
	CAPT3743*4A*	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712112
	CAPT3743*4A*	G*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712125
	CAPT3743*4A*	A*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712113
	CAPT3743*4A*	G*E80603B*B*	23,600	17,300	14.5	11.5	725	8712123
	CAPT3743*4A*	A*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712110
	CAPT3743*4A*+EEP		23,000	16,900	14.0	11.5	725	8712137
	CAPT3743*4A*+MBVC1200**-1A*		23,600	17,300	14.5	12.0	760	8712138
	CHPF2430B6C*+TXV	A*EH800603B*A*	23,000	16,900	14.0	11.5	725	9060492
	CHPF3636B6C*	A*EC960303ANA*	23,400	16,800	14.5	12.0	750	10516276
	CHPF3636B6C*	A*EC960403ANA*	23,200	16,700	14.5	11.5	750	10516283
	CHPF3636B6C*	A*EC960603ANA*	23,400	16,800	14.5	11.5	700	10516287
	CHPF3636B6C*	A*EC960403BNA*	23,200	16,400	14.5	12.2	725	10338591
	CHPF3636B6C*	A*VC80603B*B*	23,600	17,800	14.5	11.5	750	9947404
	CHPF3636B6C*	A*VC80803B*B*	23,600	17,800	14.5	11.5	750	9947408
	CHPF3636B6C*	G*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712157
	CHPF3636B6C*	A*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712146
	CHPF3636B6C*	G*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712159
	CHPF3636B6C*	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712141
	CHPF3636B6C*	A*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712139
	CHPF3636B6C*	G*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712154
	CHPF3636B6C*	A*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712148
	CHPF3636B6C*	G*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712155
	CHPF3636B6C*	A*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712144
	CHPF3636B6C*	A*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712143
	CHPF3636B6C*	G*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712158
	CHPF3636B6C*	A*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712142
	CHPF3636B6C*	G*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712153
	CHPF3636B6C*	G*E80603B*B*	23,600	17,300	14.5	11.5	725	8712149
	CHPF3636B6C*	G*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712150
	CHPF3636B6C*	A*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712147
	CHPF3636B6C*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712152
	CHPF3636B6C*	A*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712140
CHPF3636B6C*	G*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712156	
CHPF3636B6C*	A*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712145	
CHPF3636B6C*	G*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712151	
CHPF3636B6C*+EEP		23,600	17,300	14.0	11.5	725	8712160	
CHPF3636B6C*+EEP+TXV		23,600	17,300	14.5	11.5	725	8712161	
CHPF3636B6C*+MBVC1200**-1A*		23,600	17,300	14.5	12.0	725	8712162	
CHPF3636B6C*+TXV	A*EC960303ANA*	23,400	16,800	14.5	12.0	750	10516277	
CHPF3636B6C*+TXV	A*EC960403ANA*	23,200	16,700	15.0	12.0	750	10516284	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
	CHPF3636B6C*+TXV	A*EC960603ANA*	23,400	16,800	14.5	11.5	700	10516288
	CHPF3636B6C*+TXV	A*EC960403BNA*	23,200	16,400	15.0	12.5	725	10338592
	CHPF3636B6C*+TXV	A*VC80603B*B*	23,600	17,800	14.5	11.5	750	9948954
	CHPF3636B6C*+TXV	A*VC80803B*B*	23,600	17,800	14.5	11.5	750	9948959
	CHPF3636B6C*+TXV	G*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712182
	CHPF3636B6C*+TXV	A*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712172
	CHPF3636B6C*+TXV	A*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712169
	CHPF3636B6C*+TXV	G*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712181
	CHPF3636B6C*+TXV	G*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712177
	CHPF3636B6C*+TXV	A*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712163
	CHPF3636B6C*+TXV	A*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712171
	CHPF3636B6C*+TXV	G*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712178
	CHPF3636B6C*+TXV	A*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712166
	CHPF3636B6C*+TXV	A*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712164
	CHPF3636B6C*+TXV	A*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712167
	CHPF3636B6C*+TXV	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712165
	CHPF3636B6C*+TXV	G*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712174
	CHPF3636B6C*+TXV	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712176
	CHPF3636B6C*+TXV	G*E80603B*B*	23,600	17,300	14.5	11.5	725	8712173
	CHPF3636B6C*+TXV	A*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712168
	CHPF3636B6C*+TXV	A*EH800603B*A*	23,600	17,300	14.5	11.5	725	9060493
	CHPF3636B6C*+TXV	G*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712179
	CHPF3636B6C*+TXV	G*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712175
	CHPF3636B6C*+TXV	G*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712183
	CHPF3636B6C*+TXV	G*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712180
	CHPF3636B6C*+TXV	A*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712170
	CHPF3642C6C*	G*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712187
	CHPF3642C6C*	G*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712188
	CHPF3642C6C*	A*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712186
	CHPF3642C6C*	G*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712189
	CHPF3642C6C*	A*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712184
	CHPF3642C6C*	A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712185
	CHPF3642C6C*+EEP		23,600	17,300	14.0	11.5	725	8712190
	CHPF3642C6C*+EEP+TXV		23,600	17,300	14.5	11.5	725	8712191
	CHPF3642C6C*+TXV	A*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712192
	CHPF3642C6C*+TXV	G*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712196
	CHPF3642C6C*+TXV	G*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712197
	CHPF3642C6C*+TXV	A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712193
	CHPF3642C6C*+TXV	A*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712194
	CHPF3642C6C*+TXV	G*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712195
	CSCF1824N6D*+TXV	A*EC960303ANA*	22,000	15,800	14.0	11.5	800	10516278
	CSCF1824N6D*+TXV	A*EC960403ANA*	22,000	15,800	14.0	11.5	800	10516285
	CSCF1824N6D*+TXV	A*EC960603ANA*	22,400	16,100	14.5	11.5	750	10516289
	CSCF3036N6D*	A*EC960403BNA*	23,600	16,700	14.5	12.2	800	10338593
	CSCF3036N6D*	A*VC80603B*B*	23,000	17,400	14.5	11.5	750	9947405
	CSCF3036N6D*	A*VC80803B*B*	23,000	17,400	14.5	11.5	750	9947409
	CSCF3036N6D*	A*VC80804C*B*	23,600	17,800	14.5	11.5	800	9947411
	CSCF3036N6D*	A*VC80805D*B*	23,600	17,800	14.5	11.5	750	9947413
	CSCF3036N6D*	G*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712223
	CSCF3036N6D*	G*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712212
	CSCF3036N6D*	A*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712199
	CSCF3036N6D*	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712213
	CSCF3036N6D*	A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712207
	CSCF3036N6D*	G*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712215
	CSCF3036N6D*	G*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712222
	CSCF3036N6D*	A*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712208
	CSCF3036N6D*	G*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712221
	CSCF3036N6D*	A*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712204

ASX14  
0241L\*  
(Contd.)



OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0241L* (Contd.)	CSCF3036N6D*	A*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712209
	CSCF3036N6D*	A*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712210
	CSCF3036N6D*	G*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712214
	CSCF3036N6D*	A*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712203
	CSCF3036N6D*	G*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712218
	CSCF3036N6D*	A*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712205
	CSCF3036N6D*	A*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712201
	CSCF3036N6D*	G*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712219
	CSCF3036N6D*	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712200
	CSCF3036N6D*	G*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712211
	CSCF3036N6D*	A*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712206
	CSCF3036N6D*	A*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712211
	CSCF3036N6D*	A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712220
	CSCF3036N6D*	G*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712217
	CSCF3036N6D*	G*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712216
	CSCF3036N6D*	A*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712202
	CSCF3036N6D*+EEP		23,600	17,300	14.0	11.5	800	8712224
	CSCF3036N6D*+EEP+TXV		23,600	17,300	14.0	11.5	800	8712225
	CSCF3036N6D*+TXV	A*EC960403BNA*	23,600	16,700	15.0	12.5	800	10338594
	CSCF3036N6D*+TXV	A*VC80603B*B*	23,600	17,800	14.5	11.5	750	9948955
	CSCF3036N6D*+TXV	A*VC80803B*B*	23,600	17,800	14.5	11.5	750	9948960
	CSCF3036N6D*+TXV	A*VC80804C*B*	23,600	17,800	14.5	11.5	800	9948962
	CSCF3036N6D*+TXV	A*VC80805D*B*	23,600	17,800	14.5	11.5	750	9948964
	CSCF3036N6D*+TXV	G*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712250
	CSCF3036N6D*+TXV	G*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712239
	CSCF3036N6D*+TXV	G*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712244
	CSCF3036N6D*+TXV	G*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712248
	CSCF3036N6D*+TXV	A*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712227
	CSCF3036N6D*+TXV	A*VC960804CNA*	23,600	17,300	14.5	11.5	810	8712235
	CSCF3036N6D*+TXV	G*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712241
	CSCF3036N6D*+TXV	G*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712245
	CSCF3036N6D*+TXV	A*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712238
	CSCF3036N6D*+TXV	A*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712233
	CSCF3036N6D*+TXV	A*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712236
	CSCF3036N6D*+TXV	G*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712247
	CSCF3036N6D*+TXV	G*VC960603BNA*	23,600	17,300	14.5	11.5	820	8712246
	CSCF3036N6D*+TXV	G*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712243
	CSCF3036N6D*+TXV	A*VC960803BNA*	23,600	17,300	14.5	11.5	800	8712234
	CSCF3036N6D*+TXV	G*EC960402BNA*	23,400	17,200	14.5	11.5	775	8712240
	CSCF3036N6D*+TXV	A*VC80604B*B*	23,600	17,300	14.5	11.5	750	8712230
CSCF3036N6D*+TXV	A*VC80805C*B*	23,600	17,300	14.5	11.5	730	8712231	
CSCF3036N6D*+TXV	A*EC960302BNA*	23,400	17,200	14.5	11.5	750	8712226	
CSCF3036N6D*+TXV	A*VC960403BNA*	23,600	17,300	14.5	11.5	805	8712232	
CSCF3036N6D*+TXV	G*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712242	
CSCF3036N6D*+TXV	G*VM970603BNA*	23,600	17,300	14.5	11.5	820	8712249	
CSCF3036N6D*+TXV	G*VM970804CNA*	23,600	17,300	14.5	11.5	810	8712251	
CSCF3036N6D*+TXV	A*EC960803BNA*	23,400	17,200	14.5	11.5	750	8712229	
CSCF3036N6D*+TXV	A*VM970803BNA*	23,600	17,300	14.5	11.5	800	8712237	
CSCF3036N6D*+TXV	A*EC960603BNA*	23,400	17,200	14.5	11.5	725	8712228	
CSCF3642N6D*+EEP		23,600	17,300	14.0	11.5	725	8712252	
CSCF3642N6D*+EEP+TXV		23,600	17,300	14.0	11.5	725	8712253	
ASX14 0251L*	ACNF25XX16A*		22,800	16,400	14.0	12.2	710	8740702
	ARUF29B14A*		23,600	16,900	14.0	12.2	860	8714959
	ARUF31B14A*		23,600	16,900	14.0	12.2	870	8714960
	ASPT25B14A*		23,600	16,900	14.5	12.2	800	8714962
	ASPT29B14A*		24,000	17,200	15.0	12.5	790	8714963
	ASPT30C14A*		23,600	16,900	15.0	12.5	845	8714964
ASPT33C14B*		24,000	17,200	15.0	12.5	820	201834858	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0251L* (Contd.)	AVPTC24B14A*		23,000	16,500	14.0	12.2	795	8714965
	AVPTC25B14A*		23,200	16,600	14.5	12.2	850	8996354
	AVPTC29B14A*		23,800	17,100	15.0	12.5	795	8996355
	AVPTC30C14A*		23,600	16,900	15.0	12.5	780	8714966
	AVPTC33C14A*		24,000	17,200	15.0	12.5	785	10221071
	AWUF25XX16A*		22,000	15,800	14.0	12.2	750	8714967
	AWUF31XX16A*		23,000	16,500	14.5	12.2	800	8714968
	AWUF32XX16A*		23,000	16,500	14.5	12.2	800	8714969
	CA*F3636*6D*	A*EC960303ANA*	23,400	16,800	14.5	12.2	800	10516294
	CA*F3636*6D*	A*EC960403ANA*	23,400	16,800	14.5	12.2	800	10516299
	CA*F3636*6D*	A*EC960603ANA*	23,400	16,800	14.5	12.2	750	10516290
	CA*F3636*6D*	A*EC960403BNA*	23,600	16,900	14.5	12.2	800	10338595
	CA*F3636*6D*	A*VC80603B*B*	23,600	17,400	15.0	12.5	750	9947414
	CA*F3636*6D*	A*VC80803B*B*	23,600	17,400	15.0	12.5	750	9947419
	CA*F3636*6D*	A*VC80804C*B*	23,600	17,400	15.0	12.5	800	9947424
	CA*F3636*6D*	A*VC80805D*B*	23,600	17,400	15.0	12.5	800	9947429
	CA*F3636*6D*	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8714994
	CA*F3636*6D*	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8714991
	CA*F3636*6D*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8714988
	CA*F3636*6D*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8714993
	CA*F3636*6D*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8714979
	CA*F3636*6D*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8714982
	CA*F3636*6D*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8714996
	CA*F3636*6D*	A*VC960803BNA*	23,600	16,900	15.0	12.5	820	8714978
	CA*F3636*6D*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8714970
	CA*F3636*6D*	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8714990
	CA*F3636*6D*	A*EC960603BNA*	23,400	16,800	14.5	12.2	775	8714972
	CA*F3636*6D*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8714975
	CA*F3636*6D*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8714974
	CA*F3636*6D*	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8714976
	CA*F3636*6D*	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8714977
	CA*F3636*6D*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8714985
	CA*F3636*6D*	G*VC960803BNA*	23,600	16,900	15.0	12.5	820	8714992
	CA*F3636*6D*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8714987
	CA*F3636*6D*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8714989
	CA*F3636*6D*	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8714995
	CA*F3636*6D*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8714984
	CA*F3636*6D*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8714971
	CA*F3636*6D*	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8714980
	CA*F3636*6D*	G*EC960603BNA*	23,400	16,800	14.5	12.2	775	8714986
	CA*F3636*6D*	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8714981
	CA*F3636*6D*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8714973
	CA*F3636*6D*	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8714983
	CA*F3636*6D*+EEP		23,600	16,900	14.0	12.2	725	8714997
	CA*F3636*6D*+EEP+TXV		23,600	16,900	14.0	12.2	725	8714998
	CA*F3636*6D*+MBVC1200**-1A*		23,600	16,900	15.0	12.5	775	8714999
	CA*F3636*6D*+TXV	A*EC960303ANA*	23,400	16,800	15.0	12.5	800	10516295
	CA*F3636*6D*+TXV	A*EC960403ANA*	23,400	16,800	15.0	12.5	800	10516300
	CA*F3636*6D*+TXV	A*EC960603ANA*	23,400	16,800	15.0	12.5	750	10516291
	CA*F3636*6D*+TXV	A*EC960403BNA*	23,600	16,900	15.0	12.5	800	10338596
CA*F3636*6D*+TXV	A*VC80603B*B*	23,600	17,400	15.0	12.5	750	9947415	
CA*F3636*6D*+TXV	A*VC80803B*B*	23,600	17,400	15.0	12.5	750	9947420	
CA*F3636*6D*+TXV	A*VC80804C*B*	23,600	17,400	15.0	12.5	800	9947425	
CA*F3636*6D*+TXV	A*VC80805D*B*	23,600	17,400	15.0	12.5	800	9947430	
CA*F3636*6D*+TXV	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715020	
CA*F3636*6D*+TXV	G*EC960302BNA*	23,400	16,800	15.0	12.5	750	8715014	
CA*F3636*6D*+TXV	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715021	
CA*F3636*6D*+TXV	A*EC960402BNA*	23,400	16,800	15.0	12.5	775	8715001	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0251L* (Contd.)	CA*F3636*6D*+TXV	A*EC960603BNA*	23,400	16,800	15.0	12.5	775	8715002
	CA*F3636*6D*+TXV	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715005
	CA*F3636*6D*+TXV	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715018
	CA*F3636*6D*+TXV	G*EC960803BNA*	23,400	16,800	15.0	12.5	750	8715017
	CA*F3636*6D*+TXV	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8715013
	CA*F3636*6D*+TXV	G*EC960603BNA*	23,400	16,800	15.0	12.5	775	8715016
	CA*F3636*6D*+TXV	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715025
	CA*F3636*6D*+TXV	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715026
	CA*F3636*6D*+TXV	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715023
	CA*F3636*6D*+TXV	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715022
	CA*F3636*6D*+TXV	A*EC960302BNA*	23,400	16,800	15.0	12.5	750	8715000
	CA*F3636*6D*+TXV	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715011
	CA*F3636*6D*+TXV	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715009
	CA*F3636*6D*+TXV	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715012
	CA*F3636*6D*+TXV	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715008
	CA*F3636*6D*+TXV	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715007
	CA*F3636*6D*+TXV	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715024
	CA*F3636*6D*+TXV	G*EC960402BNA*	23,400	16,800	15.0	12.5	775	8715015
	CA*F3636*6D*+TXV	A*EC960803BNA*	23,400	16,800	15.0	12.5	750	8715003
	CA*F3636*6D*+TXV	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715010
	CA*F3636*6D*+TXV	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715019
	CA*F3636*6D*+TXV	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715006
	CA*F3636*6D*+TXV	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715004
	CA*F3743*6D*+EEP		23,800	17,100	14.0	12.2	725	8715027
	CA*F3743*6D*+EEP+TXV		23,800	17,100	14.5	12.2	725	8715028
	CAPT3743*4A*	A*EC960403BNA*	24,200	17,400	15.0	12.5	800	10338597
	CAPT3743*4A*	A*VC80603B*B*	23,600	17,400	15.0	12.5	750	9947416
	CAPT3743*4A*	A*VC80803B*B*	23,600	17,400	15.0	12.5	750	9947421
	CAPT3743*4A*	A*VC80804C*B*	23,600	17,400	15.0	12.5	800	9947426
	CAPT3743*4A*	A*VC80805D*B*	23,600	17,400	15.0	12.5	800	9947431
	CAPT3743*4A*	G*VM970803BNA*	23,400	16,800	15.0	12.5	800	8715054
	CAPT3743*4A*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715032
	CAPT3743*4A*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715043
	CAPT3743*4A*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715055
	CAPT3743*4A*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715030
	CAPT3743*4A*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715052
	CAPT3743*4A*	A*VC960403BNA*	23,400	16,800	15.0	12.5	805	8715035
	CAPT3743*4A*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715041
	CAPT3743*4A*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715048
	CAPT3743*4A*	A*VC960603BNA*	23,400	16,800	15.0	12.5	820	8715036
	CAPT3743*4A*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715029
	CAPT3743*4A*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715033
	CAPT3743*4A*	A*VM970603BNA*	23,400	16,800	15.0	12.5	820	8715039
	CAPT3743*4A*	G*VC960803BNA*	23,400	16,800	15.0	12.5	800	8715051
	CAPT3743*4A*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715034
	CAPT3743*4A*	G*VM970603BNA*	23,400	16,800	15.0	12.5	820	8715053
	CAPT3743*4A*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715046
	CAPT3743*4A*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715047
	CAPT3743*4A*	G*VC960403BNA*	23,400	16,800	15.0	12.5	805	8715049
	CAPT3743*4A*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715038
CAPT3743*4A*	A*VM970803BNA*	23,400	16,800	15.0	12.5	800	8715040	
CAPT3743*4A*	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715031	
CAPT3743*4A*	G*VC960603BNA*	23,400	16,800	15.0	12.5	820	8715050	
CAPT3743*4A*	A*VC960803BNA*	23,400	16,800	15.0	12.5	800	8715037	
CAPT3743*4A*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715044	
CAPT3743*4A*	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715045	
CAPT3743*4A*	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8715042	
CAPT3743*4A*+EEP		23,600	16,900	14.0	12.2	725	8715056	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0251L* (Contd.)	CAPT3743*4A*+MBVC1200**-1A*		23,600	16,900	14.5	12.2	775	8715057
	CHPF3636B6C*	A*EC960303ANA*	23,400	16,800	14.5	12.2	750	10516296
	CHPF3636B6C*	A*EC960403ANA*	23,400	16,800	14.5	12.2	750	10516301
	CHPF3636B6C*	A*EC960603ANA*	23,400	16,800	14.5	12.2	700	10516292
	CHPF3636B6C*	A*EC960403BNA*	23,800	17,100	14.5	12.2	725	10338598
	CHPF3636B6C*	A*VC80603B*B*	23,600	17,400	15.0	12.5	750	9947417
	CHPF3636B6C*	A*VC80803B*B*	23,600	17,400	15.0	12.5	750	9947422
	CHPF3636B6C*	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8715068
	CHPF3636B6C*	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715077
	CHPF3636B6C*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715062
	CHPF3636B6C*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715059
	CHPF3636B6C*	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715063
	CHPF3636B6C*	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715078
	CHPF3636B6C*	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715060
	CHPF3636B6C*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715072
	CHPF3636B6C*	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715076
	CHPF3636B6C*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715058
	CHPF3636B6C*	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715066
	CHPF3636B6C*	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715064
	CHPF3636B6C*	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715074
	CHPF3636B6C*	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715065
	CHPF3636B6C*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715061
	CHPF3636B6C*	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715075
	CHPF3636B6C*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715073
	CHPF3636B6C*	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715067
	CHPF3636B6C*	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715071
	CHPF3636B6C*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715069
	CHPF3636B6C*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715070
	CHPF3636B6C*+EEP		23,600	16,900	14.0	12.2	725	8715079
	CHPF3636B6C*+EEP+TXV		23,600	16,900	14.5	12.2	725	8715080
	CHPF3636B6C*+MBVC1200**-1A*		23,600	16,900	15.0	12.5	775	8715081
	CHPF3636B6C*+TXV	A*EC960303ANA*	23,400	16,800	14.5	12.2	750	10516297
	CHPF3636B6C*+TXV	A*EC960403ANA*	23,400	16,800	14.5	12.2	750	10516302
	CHPF3636B6C*+TXV	A*EC960603ANA*	23,400	16,800	14.5	12.2	700	10516293
	CHPF3636B6C*+TXV	A*EC960403BNA*	23,800	17,100	14.5	12.2	725	10338599
	CHPF3636B6C*+TXV	A*VC80603B*B*	23,600	17,400	15.0	12.5	750	9947418
	CHPF3636B6C*+TXV	A*VC80803B*B*	23,600	17,400	15.0	12.5	750	9947423
	CHPF3636B6C*+TXV	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715091
	CHPF3636B6C*+TXV	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715099
	CHPF3636B6C*+TXV	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715093
	CHPF3636B6C*+TXV	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715089
	CHPF3636B6C*+TXV	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715087
	CHPF3636B6C*+TXV	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715097
	CHPF3636B6C*+TXV	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715101
	CHPF3636B6C*+TXV	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715085
	CHPF3636B6C*+TXV	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715096
	CHPF3636B6C*+TXV	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715102
	CHPF3636B6C*+TXV	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715095
	CHPF3636B6C*+TXV	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715084
	CHPF3636B6C*+TXV	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715082
CHPF3636B6C*+TXV	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715098	
CHPF3636B6C*+TXV	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715086	
CHPF3636B6C*+TXV	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715100	
CHPF3636B6C*+TXV	G*E80603B*B*	23,600	16,900	15.0	12.5	725	8715092	
CHPF3636B6C*+TXV	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715088	
CHPF3636B6C*+TXV	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715090	
CHPF3636B6C*+TXV	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715083	
CHPF3636B6C*+TXV	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715094	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0251L* (Contd.)	CHPF3642C6C*	A*VC80805D*B*	23,600	17,400	15.0	12.5	800	9947432
	CHPF3642C6C*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715104
	CHPF3642C6C*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715108
	CHPF3642C6C*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715103
	CHPF3642C6C*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715105
	CHPF3642C6C*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715107
	CHPF3642C6C*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715106
	CHPF3642C6C*+TXV	A*VC80805D*B*	23,600	17,400	15.0	12.5	800	9947433
	CHPF3642C6C*+TXV	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715113
	CHPF3642C6C*+TXV	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715110
	CHPF3642C6C*+TXV	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715111
	CHPF3642C6C*+TXV	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715112
	CHPF3642C6C*+TXV	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715114
	CHPF3642C6C*+TXV	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715109
	CSCF3036N6D*	A*VC80804C*B*	23,600	17,400	15.0	12.5	800	9947427
	CSCF3036N6D*	A*VC80805D*B*	23,600	17,400	15.0	12.5	800	9947434
	CSCF3036N6D*	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715131
	CSCF3036N6D*	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715118
	CSCF3036N6D*	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715115
	CSCF3036N6D*	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715129
	CSCF3036N6D*	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715124
	CSCF3036N6D*	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715125
	CSCF3036N6D*	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715122
	CSCF3036N6D*	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715117
	CSCF3036N6D*	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715132
	CSCF3036N6D*	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715116
	CSCF3036N6D*	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715128
	CSCF3036N6D*	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715130
	CSCF3036N6D*	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715119
	CSCF3036N6D*	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715127
	CSCF3036N6D*	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715120
	CSCF3036N6D*	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715121
	CSCF3036N6D*	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715126
	CSCF3036N6D*	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715123
	CSCF3036N6D*+EEP		23,200	16,600	14.0	12.2	800	8715133
	CSCF3036N6D*+EEP+TXV		23,200	16,600	14.0	12.2	800	8715134
	CSCF3036N6D*+TXV	A*EC960303ANA*	23,000	16,500	14.0	12.2	800	10516298
	CSCF3036N6D*+TXV	A*EC960403ANA*	23,000	16,500	14.0	12.2	800	10516303
	CSCF3036N6D*+TXV	A*VC80804C*B*	23,600	17,400	15.0	12.5	800	9947428
	CSCF3036N6D*+TXV	A*VC80805D*B*	23,600	17,400	15.0	12.5	800	9947435
	CSCF3036N6D*+TXV	A*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715143
	CSCF3036N6D*+TXV	G*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715147
	CSCF3036N6D*+TXV	G*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715149
	CSCF3036N6D*+TXV	A*VC960603BNA*	23,600	16,900	15.0	12.5	820	8715138
	CSCF3036N6D*+TXV	G*VM970804CNA*	23,600	16,900	15.0	12.5	810	8715152
	CSCF3036N6D*+TXV	G*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715144
	CSCF3036N6D*+TXV	A*VC80604B*B*	23,600	16,900	15.0	12.5	750	8715135
	CSCF3036N6D*+TXV	A*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715136
	CSCF3036N6D*+TXV	A*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715141
	CSCF3036N6D*+TXV	A*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715142
CSCF3036N6D*+TXV	A*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715139	
CSCF3036N6D*+TXV	A*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715137	
CSCF3036N6D*+TXV	G*VC960403BNA*	23,600	16,900	15.0	12.5	805	8715146	
CSCF3036N6D*+TXV	G*VC960803BNA*	23,600	16,900	15.0	12.5	800	8715148	
CSCF3036N6D*+TXV	A*VC960804CNA*	23,600	16,900	15.0	12.5	810	8715140	
CSCF3036N6D*+TXV	G*VC80805C*B*	23,600	16,900	15.0	12.5	725	8715145	
CSCF3036N6D*+TXV	G*VM970603BNA*	23,600	16,900	15.0	12.5	820	8715150	
CSCF3036N6D*+TXV	G*VM970803BNA*	23,600	16,900	15.0	12.5	800	8715151	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0251L* (Contd.)	CSCF3642N6D*	A*EC960403BNA*	24,000	17,200	14.5	12.2	800	10338600
	CSCF3642N6D*	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715157
	CSCF3642N6D*	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715159
	CSCF3642N6D*	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715158
	CSCF3642N6D*	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715155
	CSCF3642N6D*	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715160
	CSCF3642N6D*	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715154
	CSCF3642N6D*	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715156
	CSCF3642N6D*	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715153
	CSCF3642N6D*+TXV	A*EC960403BNA*	24,000	17,200	15.0	12.5	800	10338601
	CSCF3642N6D*+TXV	G*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715165
	CSCF3642N6D*+TXV	A*EC960302BNA*	23,400	16,800	14.5	12.2	750	8715161
	CSCF3642N6D*+TXV	A*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715162
	CSCF3642N6D*+TXV	G*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715168
	CSCF3642N6D*+TXV	A*EC960803BNA*	23,400	16,800	14.5	12.2	750	8715164
	CSCF3642N6D*+TXV	A*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715163
	CSCF3642N6D*+TXV	G*EC960603BNA*	23,400	16,800	14.5	12.2	725	8715167
CSCF3642N6D*+TXV	G*EC960402BNA*	23,400	16,800	14.5	12.2	775	8715166	
ASX14 0301K*	ARUF31B14A*		28,200	21,000	14.0	11.5	870	7989014
	ASPT35B14A*		28,000	21,560	14.0	12.0	950	10341593
	ASPT36C14A*		29,000	21,400	14.5	12.0	1,010	7546978
	ASPT37B14A*		29,000	21,400	14.5	12.0	945	8245625
	ASPT37C14A*		29,000	21,400	15.0	12.5	1,045	8245627
	ASPT39C14B*		29,000	21,400	14.5	12.0	955	201834859
	AVPTC35B14A*		28,000	21,560	14.0	12.0	950	10341597
	AVPTC36C14A*		29,000	21,400	14.5	12.0	1,085	7546979
	AVPTC37B14A*		29,000	21,400	14.5	12.0	925	8996356
	AVPTC37C14A*		29,200	21,600	15.0	12.5	930	8996357
	AVPTC39C14A*		29,000	21,400	14.5	12.0	1,050	10221072
	AWUF31XX16A*		28,000	20,800	14.0	11.5	950	7546980
	AWUF31XX16A*+TXV		28,400	21,000	14.5	11.5	1,000	7546981
	AWUF32XX16A*		28,000	20,800	14.0	11.5	950	7546982
	AWUF32XX16A*+TXV		28,400	21,000	14.5	11.5	1,000	7546983
	AWUF37XX16B*		28,400	21,000	14.0	11.5	1,000	7546984
	AWUF37XX16B*+TXV		28,600	21,200	14.5	11.5	1,000	7546985
	CA*F3137*6A*+EEP		28,800	21,400	14.0	11.5	1,000	8191546
	CA*F3137*6A*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	8191547
	CA*F3137*6A*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	950	8191548
	CA*F3137*6A*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	950	8191549
	CA*F3137*6A*+TXV	A*EC960603ANA*	28,200	21,800	14.5	11.5	950	10516304
	CA*F3137*6A*+TXV	A*EC960403BNA*	29,200	22,400	15.0	12.5	1,000	10338602
	CA*F3137*6A*+TXV	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	8191557
	CA*F3137*6A*+TXV	A*VM970603BNA*	28,600	21,200	14.5	11.5	1,000	8191576
	CA*F3137*6A*+TXV	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	8191558
	CA*F3137*6A*+TXV	A*VC960803BNA*	28,600	21,200	14.5	11.5	950	8191575
	CA*F3137*6A*+TXV	A*VC80604B*B*	28,400	21,000	14.5	11.5	1,000	8191572
	CA*F3137*6A*+TXV	G*EC960803BNA*	28,200	21,000	14.5	11.5	950	8191559
	CA*F3137*6A*+TXV	A*EH800603B*A*	28,800	21,400	14.5	11.5	1,000	8191571
	CA*F3137*6A*+TXV	A*EC960803BNA*	28,200	21,000	14.5	11.5	950	8191580
	CA*F3137*6A*+TXV	A*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	8191573
	CA*F3137*6A*+TXV	G*VC80604B*B*	28,400	21,000	14.5	11.5	1,000	8191551
CA*F3137*6A*+TXV	A*EC960603BNA*	28,200	21,000	14.5	11.5	965	8191579	
CA*F3137*6A*+TXV	G*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	8191552	
CA*F3137*6A*+TXV	A*EC960302BNA*	28,200	21,000	14.5	11.5	940	8191577	
CA*F3137*6A*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,000	8191553	
CA*F3137*6A*+TXV	A*VC960603BNA*	28,800	21,400	14.5	11.5	1,000	8191574	
CA*F3137*6A*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,000	8191555	
CA*F3137*6A*+TXV	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	8191556	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0301K* (Contd.)	CA*F3137*6A*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,000	8191550
	CA*F3137*6A*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	950	8191554
	CA*F3137*6A*+TXV	A*EC960402BNA*	28,200	21,000	14.5	11.5	925	8191578
	CA*F3642*6D*	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547121
	CA*F3642*6D*	A*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7547093
	CA*F3642*6D*	G*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7547069
	CA*F3642*6D*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547107
	CA*F3642*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7546986
	CA*F3642*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7546987
	CA*F3642*6D*+MBVC1200**-1A*		28,800	21,400	14.5	11.5	980	7546988
	CA*F3642*6D*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	980	7546989
	CA*F3642*6D*+MBVC1600**-1A*		28,800	21,400	14.5	11.5	1,000	7546990
	CA*F3642*6D*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7546991
	CA*F3642*6D*+TXV	A*EC960403BNA*	28,800	22,200	14.5	12.2	1,000	10338603
	CA*F3642*6D*+TXV	A*VC80804C*B*	28,400	21,800	14.5	11.5	1050	9947436
	CA*F3642*6D*+TXV	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547122
	CA*F3642*6D*+TXV	A*EC960803BNA*	28,200	21,000	14.5	11.5	950	7547170
	CA*F3642*6D*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547059
	CA*F3642*6D*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547108
	CA*F3642*6D*+TXV	A*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547088
	CA*F3642*6D*+TXV	G*EC960803BNA*	28,200	21,000	14.5	11.5	950	7547145
	CA*F3642*6D*+TXV	G*VC81005C*B*	28,400	21,000	14.5	11.5	1,000	7547034
	CA*F3642*6D*+TXV	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7547019
	CA*F3642*6D*+TXV	A*VC81005C*B*	28,400	21,000	14.5	11.5	1,000	7547049
	CA*F3642*6D*+TXV	G*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	7547054
	CA*F3642*6D*+TXV	A*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7547094
	CA*F3642*6D*+TXV	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	7547140
	CA*F3642*6D*+TXV	G*VC80604B*B*	28,400	21,000	14.5	11.5	1,000	7547024
	CA*F3642*6D*+TXV	G*E80805C*B*	28,800	21,400	14.5	11.5	1,060	7547014
	CA*F3642*6D*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547102
	CA*F3642*6D*+TXV	G*VC80805C*B*	28,400	21,000	14.5	11.5	990	7547029
	CA*F3642*6D*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7547009
	CA*F3642*6D*+TXV	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	7547130
	CA*F3642*6D*+TXV	A*EC960603BNA*	28,200	21,000	14.5	11.5	965	7547165
	CA*F3642*6D*+TXV	A*VC80604B*B*	28,400	21,000	14.5	11.5	1,000	7547039
	CA*F3642*6D*+TXV	A*VC80805C*B*	28,400	21,000	14.5	11.5	990	7547044
	CA*F3642*6D*+TXV	A*EC961004CNA*	28,600	21,200	14.5	11.5	1,025	7547175
	CA*F3642*6D*+TXV	G*EC961004CNA*	28,600	21,200	14.5	11.5	1,025	7547150
	CA*F3642*6D*+TXV	A*EC960302BNA*	28,200	21,000	14.5	11.5	940	7547155
	CA*F3642*6D*+TXV	A*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	7547078
	CA*F3642*6D*+TXV	A*EC960402BNA*	28,200	21,000	14.5	11.5	925	7547160
	CA*F3642*6D*+TXV	G*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7547070
	CA*F3642*6D*+TXV	A*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547083
	CA*F3642*6D*+TXV	A*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547116
	CA*F3642*6D*+TXV	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	7547135
	CA*F3642*6D*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547064
	CA*F3743*6D*	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547123
CA*F3743*6D*	A*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547095	
CA*F3743*6D*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547109	
CA*F3743*6D*	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547071	
CA*F3743*6D*+EEP		28,800	21,400	14.0	11.5	1,000	7546992	
CA*F3743*6D*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7546993	
CA*F3743*6D*+TXV	A*EC960403BNA*	29,000	22,400	15.0	12.5	1,000	10338604	
CA*F3743*6D*+TXV	A*VC80804C*B*	28,600	22,000	14.5	11.5	1050	9947437	
CA*F3743*6D*+TXV	A*EC960603BNA*	28,400	21,000	14.5	11.5	965	7547166	
CA*F3743*6D*+TXV	G*EC960402BNA*	28,400	21,000	14.5	11.5	925	7547136	
CA*F3743*6D*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547110	
CA*F3743*6D*+TXV	A*EC960302BNA*	28,400	21,000	14.5	11.5	940	7547156	

See Notes on Page 78.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0301K* (Contd.)	CA*F3743*6D*+TXV	A*EC960803BNA*	28,400	21,000	14.5	11.5	950	7547171
	CA*F3743*6D*+TXV	A*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7547079
	CA*F3743*6D*+TXV	A*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7547050
	CA*F3743*6D*+TXV	G*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7547055
	CA*F3743*6D*+TXV	A*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547084
	CA*F3743*6D*+TXV	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7547020
	CA*F3743*6D*+TXV	G*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7547035
	CA*F3743*6D*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547065
	CA*F3743*6D*+TXV	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547124
	CA*F3743*6D*+TXV	A*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547096
	CA*F3743*6D*+TXV	A*EC961004CNA*	28,800	21,400	14.5	11.5	1,025	7547176
	CA*F3743*6D*+TXV	G*E80603B*B*	28,800	21,400	14.5	12.0	1,050	7547010
	CA*F3743*6D*+TXV	A*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547089
	CA*F3743*6D*+TXV	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547072
	CA*F3743*6D*+TXV	G*EC960302BNA*	28,400	21,000	14.5	11.5	940	7547131
	CA*F3743*6D*+TXV	G*E80805C*B*	28,800	21,400	14.5	12.0	1,060	7547015
	CA*F3743*6D*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547103
	CA*F3743*6D*+TXV	A*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7547040
	CA*F3743*6D*+TXV	A*VC80805C*B*	28,600	21,200	14.5	11.5	990	7547045
	CA*F3743*6D*+TXV	G*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7547025
	CA*F3743*6D*+TXV	A*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547117
	CA*F3743*6D*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547060
	CA*F3743*6D*+TXV	G*EC961004CNA*	28,800	21,400	14.5	11.5	1,025	7547151
	CA*F3743*6D*+TXV	A*EC960402BNA*	28,400	21,000	14.5	11.5	925	7547161
	CA*F3743*6D*+TXV	G*EC960603BNA*	28,400	21,000	14.5	11.5	965	7547141
	CA*F3743*6D*+TXV	G*EC960803BNA*	28,400	21,000	14.5	11.5	950	7547146
	CA*F3743*6D*+TXV	G*VC80805C*B*	28,600	21,200	14.5	11.5	990	7547030
	CAPT3743*4A*	A*EC960403BNA*	29,000	22,400	15.0	12.5	1,000	10338605
	CAPT3743*4A*	A*VC80804C*B*	28,400	21,800	14.5	11.5	1050	9947438
	CAPT3743*4A*	A*VC960603BNA*	28,600	21,200	14.5	11.5	1,040	7547085
	CAPT3743*4A*	G*VC960603BNA*	28,600	21,200	14.5	11.5	1,040	7547061
	CAPT3743*4A*	G*VC960803BNA*	28,400	21,000	14.5	11.5	975	7547066
	CAPT3743*4A*	A*VC960803BNA*	28,400	21,000	14.5	11.5	975	7547090
	CAPT3743*4A*	G*EC961004CNA*	28,600	21,200	14.5	11.5	1,025	7547152
	CAPT3743*4A*	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547104
	CAPT3743*4A*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547111
	CAPT3743*4A*	A*EC961004CNA*	28,600	21,200	14.5	11.5	1,025	7547177
	CAPT3743*4A*	G*VC80604B*B*	28,400	21,000	14.5	11.5	1,000	7547026
	CAPT3743*4A*	G*VC81005C*B*	28,400	21,000	14.5	11.5	1,000	7547036
	CAPT3743*4A*	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	7547142
	CAPT3743*4A*	A*EC960603BNA*	28,200	21,000	14.5	11.5	965	7547167
	CAPT3743*4A*	A*EC960302BNA*	28,200	21,000	14.5	11.5	940	7547157
	CAPT3743*4A*	A*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	7547080
	CAPT3743*4A*	A*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7547097
	CAPT3743*4A*	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7547011
	CAPT3743*4A*	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	7547137
	CAPT3743*4A*	G*VC80805C*B*	28,400	21,000	14.5	11.5	990	7547031
	CAPT3743*4A*	G*EC960803BNA*	28,200	21,000	14.5	11.5	950	7547147
CAPT3743*4A*	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	7547132	
CAPT3743*4A*	A*EC960803BNA*	28,200	21,000	14.5	11.5	950	7547172	
CAPT3743*4A*	A*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547118	
CAPT3743*4A*	A*VC80805C*B*	28,400	21,000	14.5	11.5	990	7547046	
CAPT3743*4A*	A*VC80604B*B*	28,400	21,000	14.5	11.5	1,000	7547041	
CAPT3743*4A*	G*VC960804CNA*	28,600	21,200	14.5	11.5	1,000	7547073	
CAPT3743*4A*	A*VC81005C*B*	28,400	21,000	14.5	11.5	1,000	7547051	
CAPT3743*4A*	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547125	
CAPT3743*4A*	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7547021	
CAPT3743*4A*	G*VC960403BNA*	28,600	21,200	14.5	11.5	1,000	7547056	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0301K* (Contd.)	CAPT3743*4A*	A*EC960402BNA*	28,200	21,000	14.5	11.5	925	7547162
	CAPT3743*4A*	G*E80805C*B*	28,800	21,400	14.5	11.5	1,060	7547016
	CAPT3743*4A*+EEP		28,800	21,400	14.5	11.5	1,000	7546994
	CAPT3743*4A*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	980	7546995
	CAPT3743*4A*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7546996
	CHPF3636B6C*+TXV	A*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547086
	CHPF3636B6C*+TXV	A*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7547081
	CHPF3636B6C*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547067
	CHPF3636B6C*+TXV	A*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547119
	CHPF3636B6C*+TXV	A*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547091
	CHPF3636B6C*+TXV	G*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7547057
	CHPF3636B6C*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547062
	CHPF3636B6C*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547105
	CHPF3642C6C*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547112
	CHPF3642C6C*	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547074
	CHPF3642C6C*	A*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547098
	CHPF3642C6C*	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547126
	CHPF3642C6C*+EEP		28,800	21,400	14.0	11.5	1,000	7546997
	CHPF3642C6C*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7546998
	CHPF3642C6C*+MBVC1200**-1A*		28,800	21,400	14.5	12.0	1,000	7546999
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7547000
	CHPF3642C6C*+MBVC1600**-1A*		28,800	21,400	14.5	12.0	1,000	7547001
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,800	21,400	14.5	12.0	1,000	7547002
	CHPF3642C6C*+TXV	A*EC960403BNA*	28,600	22,000	14.5	12.2	975	10338606
	CHPF3642C6C*+TXV	A*VC80804C*B*	28,600	22,000	14.5	11.5	1000	9947439
	CHPF3642C6C*+TXV	G*EC961004CNA*	28,800	21,400	14.5	11.5	1,025	7547153
	CHPF3642C6C*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7547012
	CHPF3642C6C*+TXV	G*EC960803BNA*	28,400	21,000	14.5	11.5	950	7547148
	CHPF3642C6C*+TXV	A*EC961004CNA*	28,800	21,400	14.5	11.5	1,025	7547178
	CHPF3642C6C*+TXV	A*VC80805C*B*	28,600	21,200	14.5	11.5	990	7547047
	CHPF3642C6C*+TXV	A*EC960302BNA*	28,400	21,000	14.5	11.5	940	7547158
	CHPF3642C6C*+TXV	A*EC960402BNA*	28,400	21,000	14.5	11.5	925	7547163
	CHPF3642C6C*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547113
	CHPF3642C6C*+TXV	A*EC960803BNA*	28,400	21,000	14.5	11.5	950	7547173
	CHPF3642C6C*+TXV	G*EC960603BNA*	28,400	21,000	14.5	11.5	965	7547143
	CHPF3642C6C*+TXV	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547075
	CHPF3642C6C*+TXV	G*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7547037
	CHPF3642C6C*+TXV	G*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7547027
	CHPF3642C6C*+TXV	A*EC960603BNA*	28,400	21,000	14.5	11.5	965	7547168
	CHPF3642C6C*+TXV	A*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7547052
	CHPF3642C6C*+TXV	G*EC960402BNA*	28,400	21,000	14.5	11.5	925	7547138
	CHPF3642C6C*+TXV	G*E81005C*B*	28,800	21,400	14.5	11.5	1,080	7547022
	CHPF3642C6C*+TXV	G*VC80805C*B*	28,600	21,200	14.5	11.5	990	7547032
	CHPF3642C6C*+TXV	G*E80805C*B*	28,800	21,400	14.5	11.5	1,000	7547017
	CHPF3642C6C*+TXV	A*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547099
	CHPF3642C6C*+TXV	G*EC960302BNA*	28,400	21,000	14.5	11.5	940	7547133
	CHPF3642C6C*+TXV	A*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7547042
	CHPF3642C6C*+TXV	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547127
	CHPF3743C6B*+EEP		28,800	21,400	14.0	11.5	1,000	7547003
	CHPF3743C6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7547004
CHPF3743D6B*+EEP		28,800	21,400	14.0	11.5	1,000	7547005	
CHPF3743D6B*+EEP+TXV		28,800	21,400	14.0	11.5	1,000	7547006	
CSCF3642N6D*	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547114	
CSCF3642N6D*	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547128	
CSCF3642N6D*	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547076	
CSCF3642N6D*	A*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547100	
CSCF3642N6D*+EEP		28,600	21,200	14.0	11.5	1,000	7547007	
CSCF3642N6D*+EEP+TXV		28,600	21,200	14.0	11.5	1,000	7547008	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0301K* (Contd.)	CSCF3642N6D*+TXV	A*EC960403BNA*	28,600	22,000	14.5	12.2	1,000	10338607
	CSCF3642N6D*+TXV	A*VC80804C*B*	28,600	22,000	14.5	11.5	1050	9947440
	CSCF3642N6D*+TXV	A*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7547043
	CSCF3642N6D*+TXV	G*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7547058
	CSCF3642N6D*+TXV	A*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547129
	CSCF3642N6D*+TXV	A*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547101
	CSCF3642N6D*+TXV	A*VC80805C*B*	28,600	21,200	14.5	11.5	990	7547048
	CSCF3642N6D*+TXV	G*EC960803BNA*	28,400	21,000	14.5	11.5	950	7547149
	CSCF3642N6D*+TXV	G*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7547038
	CSCF3642N6D*+TXV	G*VC960804CNA*	28,800	21,400	14.5	11.5	1,000	7547077
	CSCF3642N6D*+TXV	G*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547106
	CSCF3642N6D*+TXV	A*EC960302BNA*	28,200	21,000	14.5	11.5	940	7547159
	CSCF3642N6D*+TXV	G*EC960302BNA*	28,200	21,000	14.5	11.5	940	7547134
	CSCF3642N6D*+TXV	G*EC960603BNA*	28,200	21,000	14.5	11.5	965	7547144
	CSCF3642N6D*+TXV	A*VC81005C*B*	28,600	21,200	14.5	11.5	1,000	7547053
	CSCF3642N6D*+TXV	A*EC960603BNA*	28,200	21,000	14.5	11.5	965	7547169
	CSCF3642N6D*+TXV	A*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547092
	CSCF3642N6D*+TXV	G*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547063
	CSCF3642N6D*+TXV	A*VC960603BNA*	28,800	21,400	14.5	11.5	1,040	7547087
	CSCF3642N6D*+TXV	G*VC80604B*B*	28,600	21,200	14.5	11.5	1,000	7547028
	CSCF3642N6D*+TXV	G*VC960803BNA*	28,600	21,200	14.5	11.5	975	7547068
	CSCF3642N6D*+TXV	G*VC80805C*B*	28,600	21,200	14.5	11.5	990	7547033
	CSCF3642N6D*+TXV	A*EC960803BNA*	28,400	21,000	14.5	11.5	950	7547174
	CSCF3642N6D*+TXV	A*VC960403BNA*	28,800	21,400	14.5	11.5	1,000	7547082
	CSCF3642N6D*+TXV	G*VM970804CNA*	28,600	21,200	14.5	11.5	1,000	7547115
	CSCF3642N6D*+TXV	G*E80805C*B*	28,800	21,400	14.5	11.5	1,060	7547018
	CSCF3642N6D*+TXV	G*E80603B*B*	28,800	21,400	14.5	11.5	1,050	7547013
	CSCF3642N6D*+TXV	A*EC961004CNA*	28,400	21,000	14.5	11.5	1,025	7547179
CSCF3642N6D*+TXV	G*EC961004CNA*	28,400	21,000	14.5	11.5	1,025	7547154	
CSCF3642N6D*+TXV	G*E81005C*B*	28,600	21,200	14.5	11.5	1,070	7547023	
CSCF3642N6D*+TXV	A*EC960402BNA*	28,200	21,000	14.5	11.5	925	7547164	
CSCF3642N6D*+TXV	G*EC960402BNA*	28,200	21,000	14.5	11.5	925	7547139	
CSCF3642N6D*+TXV	A*VM970603BNA*	28,600	21,200	14.5	11.5	1,040	7547120	
ASX14 0311K*	ARUF31B14A*		28,200	22,200	14.0	12.2	870	7989015
	ARUF37C14A*		28,400	22,400	14.0	12.2	1,050	7989016
	ASPT35B14A*		27,400	21,564	14.0	12.2	950	10341530
	ASPT36C14A*		28,000	22,000	15.0	12.5	1,010	7547180
	ASPT37B14A*		29,000	22,800	14.5	12.2	945	8245628
	ASPT37C14A*		29,000	22,800	15.0	12.5	1,045	8245630
	ASPT39C14B*		28,000	22,000	15.0	12.5	1,000	201834860
	AVPTC35B14A*		27,400	21,564	14.0	12.2	950	10341538
	AVPTC36C14A*		28,000	22,000	15.0	12.5	1,000	7547181
	AVPTC37B14A*		28,000	22,000	14.5	12.2	925	8996358
	AVPTC37C14A*		28,200	22,200	15.0	12.5	930	8996359
	AVPTC39C14A*		28,000	22,000	15.0	12.5	965	10221073
	AWUF31XX16A*		28,000	22,000	14.0	12.2	1,000	7547182
	AWUF31XX16A*+TXV		28,000	22,000	14.5	12.2	1,000	7547183
	AWUF32XX16A*		28,000	22,000	14.0	12.2	950	7547184
	AWUF32XX16A*+TXV		28,000	22,000	14.5	12.2	950	7547185
	AWUF37XX16B*		28,000	22,000	14.0	12.2	950	7547186
	AWUF37XX16B*+TXV		28,000	22,000	14.5	12.2	950	7547187
	CA*F3137*6A*	A*EC960303ANA*	28,200	22,200	14.5	12.5	975	10516309
	CA*F3137*6A*	A*EC960403ANA*	28,200	22,200	15.0	12.5	975	10516310
	CA*F3137*6A*	A*EC960603ANA*	28,200	22,200	14.5	12.5	950	10516305
CA*F3137*6A*	A*EC960403BNA*	28,000	22,000	15.0	12.5	1,000	10338608	
CA*F3137*6A*	A*VC80603B*B*	28,400	23,000	14.5	12.2	1000	9947441	
CA*F3137*6A*	A*VC80803B*B*	28,400	23,000	14.5	12.2	1050	9947446	
CA*F3137*6A*	G*VC80604B*B*	28,400	22,400	15.0	12.5	1,000	7547216	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0311K* (Contd.)	CA*F3137*6A*	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547294
	CA*F3137*6A*	A*EC960402BNA*	28,200	22,200	15.0	12.5	925	7547352
	CA*F3137*6A*	G*VC960803BNA*	28,400	22,400	15.0	12.5	975	7547256
	CA*F3137*6A*	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547308
	CA*F3137*6A*	G*EC960302BNA*	28,200	22,200	15.0	12.5	940	7547322
	CA*F3137*6A*	G*EC960803BNA*	28,200	22,200	15.0	12.5	950	7547337
	CA*F3137*6A*	A*EC960603BNA*	28,200	22,200	15.0	12.5	965	7547357
	CA*F3137*6A*	A*VC960803BNA*	28,400	22,400	15.0	12.5	975	7547280
	CA*F3137*6A*	A*EC960302BNA*	28,200	22,200	15.0	12.5	940	7547347
	CA*F3137*6A*	A*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7547270
	CA*F3137*6A*	G*EC960603BNA*	28,200	22,200	15.0	12.5	965	7547332
	CA*F3137*6A*	G*E80603B*B*	28,400	22,400	14.5	12.2	1,050	7547201
	CA*F3137*6A*	G*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7547251
	CA*F3137*6A*	A*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7547275
	CA*F3137*6A*	G*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7547246
	CA*F3137*6A*	A*EC960803BNA*	28,200	22,200	15.0	12.5	950	7547362
	CA*F3137*6A*	G*EC960402BNA*	28,200	22,200	15.0	12.5	925	7547327
	CA*F3137*6A*	A*VC80604B*B*	28,400	22,400	15.0	12.5	1,000	7547231
	CA*F3137*6A*+EEP		28,600	22,600	14.0	12.2	1,000	7547188
	CA*F3137*6A*+EEP+TXV		28,600	22,600	14.0	12.2	1,000	7547189
	CA*F3743*6D*	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547301
	CA*F3743*6D*	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547287
	CA*F3743*6D*	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547315
	CA*F3743*6D*	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547263
	CA*F3743*6D*+TXV	A*EC960403BNA*	28,000	22,000	15.0	12.5	1,000	10338609
	CA*F3743*6D*+TXV	A*VC80603B*B*	28,400	23,000	15.0	12.5	1000	9947442
	CA*F3743*6D*+TXV	A*VC80803B*B*	28,400	23,000	15.0	12.5	1050	9947447
	CA*F3743*6D*+TXV	A*VC80804C*B*	28,600	23,200	15.0	12.5	1050	9947451
	CA*F3743*6D*+TXV	A*VC80805D*B*	28,600	23,200	15.0	12.5	1000	9947455
	CA*F3743*6D*+TXV	G*EC960803BNA*	28,400	22,400	15.0	12.5	950	7547338
	CA*F3743*6D*+TXV	A*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7547232
	CA*F3743*6D*+TXV	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547309
	CA*F3743*6D*+TXV	G*VC960403BNA*	28,800	22,600	15.0	12.5	1,000	7547247
	CA*F3743*6D*+TXV	A*EC960603BNA*	28,400	22,400	15.0	12.5	965	7547358
	CA*F3743*6D*+TXV	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547288
	CA*F3743*6D*+TXV	G*EC960302BNA*	28,400	22,400	15.0	12.5	940	7547323
	CA*F3743*6D*+TXV	A*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7547276
	CA*F3743*6D*+TXV	G*VC80805C*B*	28,600	22,600	15.0	12.5	990	7547222
	CA*F3743*6D*+TXV	G*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7547343
	CA*F3743*6D*+TXV	A*EC960302BNA*	28,400	22,400	15.0	12.5	940	7547348
	CA*F3743*6D*+TXV	A*EC960803BNA*	28,400	22,400	15.0	12.5	950	7547363
	CA*F3743*6D*+TXV	A*EC960402BNA*	28,400	22,400	15.0	12.5	925	7547353
	CA*F3743*6D*+TXV	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547302
	CA*F3743*6D*+TXV	G*E80805C*B*	28,600	22,600	15.0	12.5	1,000	7547207
	CA*F3743*6D*+TXV	G*VC960803BNA*	28,400	22,400	15.0	12.5	975	7547257
CA*F3743*6D*+TXV	G*E81005C*B*	28,400	22,400	15.0	12.5	1,000	7547212	
CA*F3743*6D*+TXV	G*EC960603BNA*	28,400	22,400	15.0	12.5	965	7547333	
CA*F3743*6D*+TXV	A*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7547242	
CA*F3743*6D*+TXV	A*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7547368	
CA*F3743*6D*+TXV	A*VC80805C*B*	28,600	22,600	15.0	12.5	990	7547237	
CA*F3743*6D*+TXV	A*VC960403BNA*	28,800	22,600	15.0	12.5	1,000	7547271	
CA*F3743*6D*+TXV	G*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7547227	
CA*F3743*6D*+TXV	G*E80603B*B*	28,400	22,400	15.0	12.5	1,050	7547202	
CA*F3743*6D*+TXV	G*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7547217	
CA*F3743*6D*+TXV	G*EC960402BNA*	28,400	22,400	15.0	12.5	925	7547328	
CA*F3743*6D*+TXV	G*VC960603BNA*	28,600	22,600	15.0	12.5	1,040	7547252	
CA*F3743*6D*+TXV	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547316	
CA*F3743*6D*+TXV	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547295	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0311K* (Contd.)	CA*F3743*6D*+TXV	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547264
	CA*F3743*6D*+TXV	A*VC960803BNA*	28,400	22,400	15.0	12.5	975	7547281
	CAPT3743*4A*	A*EC960403BNA*	28,000	22,000	14.5	12.2	1,000	10338610
	CAPT3743*4A*	A*VC80603B*B*	28,400	23,000	14.5	12.2	1000	9947443
	CAPT3743*4A*	A*VC80803B*B*	28,400	23,000	14.5	12.2	1050	9947448
	CAPT3743*4A*	A*VC80804C*B*	28,400	23,000	14.5	12.2	1050	9947452
	CAPT3743*4A*	G*VC81005C*B*	28,400	22,400	14.5	12.2	1,000	7547228
	CAPT3743*4A*	A*VC960603BNA*	28,400	22,400	14.5	12.2	1,040	7547277
	CAPT3743*4A*	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547296
	CAPT3743*4A*	A*VC960403BNA*	28,400	22,400	14.5	12.2	1,000	7547272
	CAPT3743*4A*	G*EC960402BNA*	28,200	22,200	14.5	12.2	925	7547329
	CAPT3743*4A*	G*E80805C*B*	28,400	22,400	14.5	12.2	1,000	7547208
	CAPT3743*4A*	G*VC960804CNA*	28,400	22,400	14.5	12.2	1,000	7547265
	CAPT3743*4A*	A*EC960302BNA*	28,200	22,200	14.5	12.2	940	7547349
	CAPT3743*4A*	G*EC961004CNA*	28,600	22,600	14.5	12.2	1,025	7547344
	CAPT3743*4A*	G*E80603B*B*	28,400	22,400	14.5	12.2	1,050	7547203
	CAPT3743*4A*	G*EC960302BNA*	28,200	22,200	14.5	12.2	940	7547324
	CAPT3743*4A*	A*VC81005C*B*	28,400	22,400	14.5	12.2	1,000	7547243
	CAPT3743*4A*	G*VC960803BNA*	27,800	21,800	15.0	12.5	975	7547258
	CAPT3743*4A*	A*VM970804CNA*	28,400	22,400	14.5	12.2	1,000	7547317
	CAPT3743*4A*	A*EC960803BNA*	28,200	22,200	14.5	12.2	950	7547364
	CAPT3743*4A*	G*VM970804CNA*	28,400	22,400	14.5	12.2	1,000	7547303
	CAPT3743*4A*	G*VC960403BNA*	28,400	22,400	14.5	12.2	1,000	7547248
	CAPT3743*4A*	A*EC960402BNA*	28,200	22,200	14.5	12.2	925	7547354
	CAPT3743*4A*	G*VC960603BNA*	28,400	22,400	14.5	12.2	1,040	7547253
	CAPT3743*4A*	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547310
	CAPT3743*4A*	A*VC960804CNA*	28,400	22,400	14.5	12.2	1,000	7547289
	CAPT3743*4A*	G*EC960803BNA*	28,200	22,200	14.5	12.2	950	7547339
	CAPT3743*4A*	A*EC961004CNA*	28,600	22,600	14.5	12.2	1,025	7547369
	CAPT3743*4A*	G*VC80604B*B*	28,400	22,400	14.5	12.2	1,000	7547218
	CAPT3743*4A*	A*VC80604B*B*	28,400	22,400	14.5	12.2	1,000	7547233
	CAPT3743*4A*	A*VC960803BNA*	27,800	21,800	15.0	12.5	975	7547282
	CAPT3743*4A*+EEP		28,000	22,000	14.5	12.2	1,000	7547190
	CAPT3743*4A*+MBVC1200**-1A*		28,600	22,600	15.0	12.5	1,000	7547191
	CAPT3743*4A*+MBVC1600**-1A*		28,600	22,600	15.0	12.5	1,000	7547192
	CHPF3636B6C*+TXV	A*VC80603B*B*	28,400	23,000	14.5	12.2	1000	9947444
	CHPF3636B6C*+TXV	A*VC80803B*B*	28,400	23,000	14.5	12.2	950	9947449
	CHPF3636B6C*+TXV	A*VC960403BNA*	28,000	22,000	14.5	12.5	1,000	7547273
	CHPF3636B6C*+TXV	A*VC960803BNA*	28,000	22,000	14.5	12.2	975	7547283
	CHPF3636B6C*+TXV	G*VM970603BNA*	28,000	22,000	14.5	12.2	1,040	7547297
	CHPF3636B6C*+TXV	G*VC960603BNA*	28,000	22,000	14.5	12.2	1,040	7547254
	CHPF3636B6C*+TXV	G*VC960403BNA*	28,000	22,000	14.5	12.5	1,000	7547249
	CHPF3636B6C*+TXV	A*VC960603BNA*	28,000	22,000	14.5	12.2	1,040	7547278
	CHPF3636B6C*+TXV	A*VM970603BNA*	28,000	22,000	14.5	12.2	1,040	7547311
	CHPF3636B6C*+TXV	G*VC960803BNA*	28,000	22,000	14.5	12.2	975	7547259
	CHPF3642C6C*+EEP		28,600	22,600	14.0	12.2	1,000	7547193
	CHPF3642C6C*+EEP+TXV		28,000	22,000	14.5	12.2	1,000	7547194
	CHPF3642C6C*+MBVC1200**-1A*		28,000	22,000	14.5	12.2	1,000	7547195
	CHPF3642C6C*+MBVC1200**-1A*+TXV		28,000	22,000	14.5	12.2	1,000	7547196
	CHPF3642C6C*+MBVC1600**-1A*		28,000	22,000	14.5	12.2	1,000	7547197
	CHPF3642C6C*+MBVC1600**-1A*+TXV		28,400	22,400	15.0	12.5	1,000	7547198
	CHPF3642C6C*+TXV	A*EC960403BNA*	28,000	22,000	14.5	12.2	975	10338611
	CHPF3642C6C*+TXV	A*VC80804C*B*	28,000	22,600	14.5	12.2	1000	9947453
	CHPF3642C6C*+TXV	A*EC960402BNA*	28,400	22,400	15.0	12.5	925	7547355
	CHPF3642C6C*+TXV	G*EC960402BNA*	28,400	22,400	15.0	12.5	925	7547330
CHPF3642C6C*+TXV	G*VC80604B*B*	28,000	22,000	14.5	12.2	1,000	7547219	
CHPF3642C6C*+TXV	A*EC960302BNA*	28,400	22,400	14.5	12.2	940	7547350	
CHPF3642C6C*+TXV	G*EC960803BNA*	28,400	22,400	14.5	12.2	950	7547340	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0311K* (Contd.)	CHPF3642C6C*+TXV	A*EC960603BNA*	28,400	22,400	14.5	12.2	965	7547360
	CHPF3642C6C*+TXV	A*EC960803BNA*	28,400	22,400	14.5	12.2	950	7547365
	CHPF3642C6C*+TXV	G*EC960603BNA*	28,400	22,400	14.5	12.2	965	7547335
	CHPF3642C6C*+TXV	G*EC960302BNA*	28,400	22,400	14.5	12.2	940	7547325
	CHPF3642C6C*+TXV	A*VC80604B*B*	28,000	22,000	14.5	12.2	1,000	7547234
	CHPF3642C6C*+TXV	G*E80603B*B*	28,000	22,000	14.5	12.2	1,050	7547204
	CHPF3642D6C*	G*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7547304
	CHPF3642D6C*	G*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7547266
	CHPF3642D6C*	A*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7547290
	CHPF3642D6C*	A*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7547318
	CHPF3642D6C*+TXV	A*VC80805D*B*	28,400	23,000	15.0	12.5	1000	9947456
	CHPF3642D6C*+TXV	A*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7547291
	CHPF3642D6C*+TXV	G*VC80805C*B*	28,600	22,600	15.0	12.5	990	7547224
	CHPF3642D6C*+TXV	G*VC81005C*B*	28,600	22,600	14.5	12.2	1,000	7547229
	CHPF3642D6C*+TXV	G*E80805C*B*	28,000	22,000	15.0	12.5	1,000	7547209
	CHPF3642D6C*+TXV	A*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7547370
	CHPF3642D6C*+TXV	A*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7547319
	CHPF3642D6C*+TXV	G*VM970804CNA*	28,600	22,600	14.5	12.2	1,000	7547305
	CHPF3642D6C*+TXV	A*VC81005C*B*	28,600	22,600	14.5	12.2	1,000	7547244
	CHPF3642D6C*+TXV	G*EC961004CNA*	28,800	22,600	15.0	12.5	1,025	7547345
	CHPF3642D6C*+TXV	A*VC80805C*B*	28,600	22,600	15.0	12.5	990	7547239
	CHPF3642D6C*+TXV	G*E81005C*B*	28,600	22,600	15.0	12.5	1,000	7547214
	CHPF3642D6C*+TXV	G*VC960804CNA*	28,600	22,600	14.5	12.2	1,000	7547267
	CSCF3642N6D*	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547320
	CSCF3642N6D*	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547268
	CSCF3642N6D*	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547292
	CSCF3642N6D*	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547306
	CSCF3642N6D*+EEP		28,400	22,400	14.0	12.2	1,000	7547199
	CSCF3642N6D*+EEP+TXV		28,400	22,400	14.5	12.2	1,000	7547200
	CSCF3642N6D*+TXV	A*EC960403ANA*	28,200	22,200	15.0	12.5	975	10516311
	CSCF3642N6D*+TXV	A*EC960403BNA*	28,000	22,000	15.0	12.5	1,000	10338612
	CSCF3642N6D*+TXV	A*VC80603B*B*	28,600	23,200	15.0	12.5	1000	9947445
	CSCF3642N6D*+TXV	A*VC80803B*B*	28,600	23,200	15.0	12.5	1050	9947450
	CSCF3642N6D*+TXV	A*VC80804C*B*	28,600	23,200	15.0	12.5	1050	9947454
	CSCF3642N6D*+TXV	A*VC80805D*B*	28,400	23,000	15.0	12.5	1000	9947457
	CSCF3642N6D*+TXV	G*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7547230
	CSCF3642N6D*+TXV	G*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547298
	CSCF3642N6D*+TXV	G*EC961004CNA*	28,400	22,400	14.5	12.2	1,025	7547346
	CSCF3642N6D*+TXV	A*EC960402BNA*	28,400	22,400	14.5	12.2	925	7547356
	CSCF3642N6D*+TXV	A*EC961004CNA*	28,400	22,400	14.5	12.2	1,025	7547371
	CSCF3642N6D*+TXV	G*EC960402BNA*	28,400	22,400	14.5	12.2	925	7547331
	CSCF3642N6D*+TXV	A*VC960603BNA*	28,400	22,400	15.0	12.5	1,040	7547279
	CSCF3642N6D*+TXV	G*EC960603BNA*	28,400	22,400	14.5	12.2	965	7547336
	CSCF3642N6D*+TXV	A*EC960803BNA*	28,400	22,400	14.5	12.2	950	7547366
	CSCF3642N6D*+TXV	A*VC81005C*B*	28,600	22,600	15.0	12.5	1,000	7547245
	CSCF3642N6D*+TXV	A*VM970603BNA*	28,400	22,400	15.0	12.5	1,040	7547312
	CSCF3642N6D*+TXV	G*E81005C*B*	28,400	22,400	15.0	12.5	1,000	7547215
	CSCF3642N6D*+TXV	A*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7547274
	CSCF3642N6D*+TXV	G*VC960803BNA*	28,400	22,400	15.0	12.5	975	7547260
	CSCF3642N6D*+TXV	A*EC960603BNA*	28,400	22,400	14.5	12.2	965	7547361
CSCF3642N6D*+TXV	G*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7547220	
CSCF3642N6D*+TXV	A*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547321	
CSCF3642N6D*+TXV	G*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547269	
CSCF3642N6D*+TXV	G*EC960302BNA*	28,400	22,400	14.5	12.2	940	7547326	
CSCF3642N6D*+TXV	G*VM970804CNA*	28,600	22,600	15.0	12.5	1,000	7547307	
CSCF3642N6D*+TXV	A*VC80805C*B*	28,400	22,400	15.0	12.5	990	7547240	
CSCF3642N6D*+TXV	A*VC960804CNA*	28,800	22,600	15.0	12.5	1,000	7547293	
CSCF3642N6D*+TXV	G*EC960803BNA*	28,400	22,400	14.5	12.2	950	7547341	

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0311K* (Contd.)	CSCF3642N6D*+TXV	A*VC960803BNA*	28,400	22,400	15.0	12.5	975	7547284
	CSCF3642N6D*+TXV	G*VC80805C*B*	28,400	22,400	15.0	12.5	990	7547225
	CSCF3642N6D*+TXV	G*VC960403BNA*	28,600	22,600	15.0	12.5	1,000	7547250
	CSCF3642N6D*+TXV	G*E80805C*B*	28,400	22,400	15.0	12.5	1,000	7547210
	CSCF3642N6D*+TXV	G*VC960603BNA*	28,400	22,400	15.0	12.5	1,040	7547255
	CSCF3642N6D*+TXV	G*E80603B*B*	28,600	22,600	15.0	12.5	1,050	7547205
	CSCF3642N6D*+TXV	A*EC960302BNA*	28,400	22,400	14.5	12.2	940	7547351
	CSCF3642N6D*+TXV	A*VC80604B*B*	28,600	22,600	15.0	12.5	1,000	7547235
ASX14 0361K*	ARUF37C14A*		33,600	25,000	14.0	11.5	1,050	7989017
	ARUF37D14A*		33,600	25,000	14.0	11.5	1,240	8171743
	ASPT36C14A*		34,200	25,400	14.5	11.5	1,210	7547372
	ASPT37C14A*		34,200	25,400	14.5	12.0	1,120	8245632
	ASPT39C14B*		34,200	25,400	14.0	11.5	1,220	201834861
	ASPT47C14B*		34,200	25,400	14.5	12.0	1,120	201834862
	ASPT47D14A*		34,600	25,600	15.0	12.5	1,205	8245635
	AVPTC36C14A*		34,200	25,400	14.5	11.5	1,100	7547374
	AVPTC37C14A*		34,200	25,400	14.5	12.0	1,130	8996360
	AVPTC37D14A*		34,600	25,600	14.5	12.2	1,145	8996361
	AVPTC39C14A*		34,200	25,400	14.5	11.5	1,220	10221074
	AVPTC42D14A*		34,800	25,800	14.5	12.0	1,120	7547375
	AVPTC49D14A*		35,000	26,000	15.0	12.5	1,075	8996362
	AWUF37XX16B*+TXV		33,000	24,400	14.5	11.5	1,050	7547376
	CA*F3137*6A*+EEP		34,000	25,200	14.0	11.5	1,200	8191560
	CA*F3137*6A*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	8191561
	CA*F3137*6A*+TXV	A*EC960603ANA*	34,000	25,200	14.0	11.5	1,125	10516306
	CA*F3137*6A*+TXV	A*EC960403BNA*	34,200	25,400	14.0	11.5	1,050	10338613
	CA*F3137*6A*+TXV	A*VC80603B*B*	33,400	25,400	14.5	12.0	1,200	9947458
	CA*F3137*6A*+TXV	A*VC80803B*B*	33,400	25,400	14.5	12.0	1,150	9947463
	CA*F3137*6A*+TXV	A*VC960803BNA*	34,400	25,400	14.0	11.5	1,150	8191585
	CA*F3137*6A*+TXV	A*EC960603BNA*	34,200	25,400	14.0	11.5	1,100	8191588
	CA*F3137*6A*+TXV	A*VM970803BNA*	34,400	25,400	14.0	11.5	1,150	8191587
	CA*F3137*6A*+TXV	G*VC960603BNA*	34,400	25,400	14.0	11.5	1,200	8191565
	CA*F3137*6A*+TXV	A*VM970603BNA*	34,400	25,400	14.0	11.5	1,200	8191586
	CA*F3137*6A*+TXV	A*VC960403BNA*	34,200	25,400	14.0	11.5	1,200	8191583
	CA*F3137*6A*+TXV	G*EC960803BNA*	34,200	25,400	14.0	11.5	1,100	8191570
	CA*F3137*6A*+TXV	A*VC960603BNA*	34,400	25,400	14.0	11.5	1,200	8191584
	CA*F3137*6A*+TXV	A*VC80604B*B*	33,600	25,000	14.0	11.5	1,240	8191582
	CA*F3137*6A*+TXV	G*EC960603BNA*	34,200	25,400	14.0	11.5	1,100	8191569
	CA*F3137*6A*+TXV	G*VM970603BNA*	34,400	25,400	14.0	11.5	1,200	8191567
	CA*F3137*6A*+TXV	G*VC960803BNA*	34,400	25,400	14.0	11.5	1,150	8191566
	CA*F3137*6A*+TXV	G*VM970803BNA*	34,400	25,400	14.0	11.5	1,150	8191568
	CA*F3137*6A*+TXV	A*EC960803BNA*	34,200	25,400	14.0	11.5	1,100	8191589
	CA*F3137*6A*+TXV	G*VC80604B*B*	33,600	25,000	14.0	11.5	1,240	8191563
	CA*F3137*6A*+TXV	A*EH800603B*A*	33,400	24,800	14.0	11.5	1,100	8191581
	CA*F3137*6A*+TXV	G*VC960403BNA*	34,200	25,400	14.0	11.5	1,200	8191564
	CA*F3137*6A*+TXV	G*E80603B*B*	33,400	24,800	14.0	11.5	1,100	8191562
	CA*F3642*6D*+EEP		34,000	25,200	14.0	11.5	1,200	7547377
	CA*F3642*6D*+EEP+TXV		34,000	25,200	14.0	11.5	1,200	7547378
	CA*F3642*6D*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,200	7547379
	CA*F3642*6D*+MBVC2000**-1A*		34,000	25,200	14.5	12.0	1,200	7547380
CA*F3743*6D*	A*VC80805D*B*	33,600	25,600	14.5	11.5	1,200	9947472	
CA*F3743*6D*	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540152	
CA*F3743*6D*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7540070	
CA*F3743*6D*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7539991	
CA*F3743*6D*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7540104	
CA*F3743*6D*	G*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7540022	
CA*F3743*6D*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7540047	
CA*F3743*6D*	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540125	



OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0361K* (Contd.)	CA*F3743*6D*	A*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7540162
	CA*F3743*6D*	A*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7540111
	CA*F3743*6D*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7539956
	CA*F3743*6D*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7539973
	CA*F3743*6D*	G*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7540084
	CA*F3743*6D*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7540015
	CA*F3743*6D*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7540097
	CA*F3743*6D*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7539949
	CA*F3743*6D*	A*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7540054
	CA*F3743*6D*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7540039
	CA*F3743*6D*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7539984
	CA*F3743*6D*	G*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7540135
	CA*F3743*6D*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7540077
	CA*F3743*6D*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7540008
	CA*F3743*6D*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7539966
	CA*F3743*6D*+EEP		34,600	25,600	14.0	11.5	1,200	7547381
	CA*F3743*6D*+EEP+TXV		34,600	25,600	14.5	11.5	1,200	7547382
	CA*F3743*6D*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7547383
	CA*F3743*6D*+MBVC2000**-1A*		35,000	26,000	14.5	11.5	1,200	7547384
	CA*F3743*6D*+TXV	A*VC80603B*B*	33,400	25,400	14.5	11.5	1200	9947459
	CA*F3743*6D*+TXV	A*VC80803B*B*	33,400	25,400	14.5	11.5	1150	9947464
	CA*F3743*6D*+TXV	A*VC80804C*B*	33,600	25,600	14.5	11.5	1250	9947468
	CA*F3743*6D*+TXV	A*VC80805D*B*	33,600	25,600	14.5	12.0	1200	9947473
	CA*F3743*6D*+TXV	G*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7540086
	CA*F3743*6D*+TXV	A*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7540164
	CA*F3743*6D*+TXV	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7540072
	CA*F3743*6D*+TXV	G*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7539975
	CA*F3743*6D*+TXV	G*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7540137
	CA*F3743*6D*+TXV	G*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7539997
	CA*F3743*6D*+TXV	A*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7540148
	CA*F3743*6D*+TXV	G*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7540024
	CA*F3743*6D*+TXV	A*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7540113
	CA*F3743*6D*+TXV	G*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7540004
	CA*F3743*6D*+TXV	A*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7540032
	CA*F3743*6D*+TXV	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7539980
	CA*F3743*6D*+TXV	A*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7540041
	CA*F3743*6D*+TXV	G*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7540062
	CA*F3743*6D*+TXV	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7539958
	CA*F3743*6D*+TXV	A*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7540036
	CA*F3743*6D*+TXV	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7539963
	CA*F3743*6D*+TXV	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7540099
	CA*F3743*6D*+TXV	A*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7540049
	CA*F3743*6D*+TXV	G*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7539968
	CA*F3743*6D*+TXV	G*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7540001
	CA*F3743*6D*+TXV	A*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7540029
CA*F3743*6D*+TXV	A*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7540090	
CA*F3743*6D*+TXV	G*E80603B*B*	33,400	24,800	14.5	11.5	1,250	7547400	
CA*F3743*6D*+TXV	G*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7540118	
CA*F3743*6D*+TXV	G*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7540066	
CA*F3743*6D*+TXV	A*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7539993	
CA*F3743*6D*+TXV	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540127	
CA*F3743*6D*+TXV	A*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7540094	
CA*F3743*6D*+TXV	G*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7540010	
CA*F3743*6D*+TXV	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540154	
CA*F3743*6D*+TXV	G*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7540017	
CA*F3743*6D*+TXV	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7540079	
CA*F3743*6D*+TXV	G*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7540122	
CA*F3743*6D*+TXV	A*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7540057	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0361K* (Contd.)	CA*F3743*6D*+TXV	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7540106
	CA*F3743*6D*+TXV	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7539951
	CA*F3743*6D*+TXV	A*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7539986
	CA*F3743*6D*+TXV	A*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7540144
	CA*F4860*6D*+EEP		34,800	25,800	14.0	11.5	1,200	7547388
	CA*F4860*6D*+EEP+TXV		34,800	25,800	14.0	11.5	1,200	7547389
	CAPT3743*4A*	A*VC80603B*B*	33,600	25,600	14.5	11.5	1,200	9947460
	CAPT3743*4A*	A*VC80803B*B*	33,600	25,600	14.5	11.5	1,150	9947465
	CAPT3743*4A*	A*VC80804C*B*	33,600	25,600	14.5	11.5	1,250	9947469
	CAPT3743*4A*	A*VC80805D*B*	33,600	25,600	14.5	11.5	1,200	9947474
	CAPT3743*4A*	G*VM971205DNA*	34,400	25,400	14.5	11.5	1,200	7547502
	CAPT3743*4A*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547420
	CAPT3743*4A*	G*VC960403BNA*	34,000	25,200	14.5	11.5	1,200	7547438
	CAPT3743*4A*	G*VM970803BNA*	34,200	25,400	14.5	11.5	1,250	7547489
	CAPT3743*4A*	A*EC960803BNA*	34,200	25,400	14.0	11.5	1,150	7547533
	CAPT3743*4A*	A*VM970603BNA*	34,200	25,400	14.5	11.5	1,250	7547507
	CAPT3743*4A*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547433
	CAPT3743*4A*	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7547425
	CAPT3743*4A*	A*VM970803BNA*	34,200	25,400	14.5	11.5	1,250	7547510
	CAPT3743*4A*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547492
	CAPT3743*4A*	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540129
	CAPT3743*4A*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7547428
	CAPT3743*4A*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7547402
	CAPT3743*4A*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547518
	CAPT3743*4A*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7547407
	CAPT3743*4A*	A*VC961205DNA*	34,400	25,400	14.5	11.5	1,200	7547481
	CAPT3743*4A*	G*VC961205DNA*	34,400	25,400	14.5	11.5	1,200	7547457
	CAPT3743*4A*	G*VC960603BNA*	34,200	25,400	14.5	11.5	1,250	7547441
	CAPT3743*4A*	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7547412
	CAPT3743*4A*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547452
	CAPT3743*4A*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547476
	CAPT3743*4A*	A*VC960603BNA*	34,200	25,400	14.5	11.5	1,250	7547465
	CAPT3743*4A*	G*VM970603BNA*	34,200	25,400	14.5	11.5	1,250	7547486
	CAPT3743*4A*	G*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7540139
	CAPT3743*4A*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547497
	CAPT3743*4A*	A*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7540166
	CAPT3743*4A*	A*VM971205DNA*	34,400	25,400	14.5	11.5	1,200	7547523
	CAPT3743*4A*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547513
	CAPT3743*4A*	A*EC960603BNA*	34,200	25,400	14.0	11.5	1,150	7540146
	CAPT3743*4A*	A*VC960803BNA*	34,200	25,400	14.5	11.5	1,250	7547468
	CAPT3743*4A*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7547471
	CAPT3743*4A*	A*VC960403BNA*	34,000	25,200	14.5	11.5	1,200	7547462
	CAPT3743*4A*	G*VC960803BNA*	34,200	25,400	14.5	11.5	1,250	7547444
	CAPT3743*4A*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7547447
	CAPT3743*4A*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7547415
	CAPT3743*4A*	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540156
	CAPT3743*4A*	G*EC960803BNA*	34,200	25,400	14.0	11.5	1,150	7547529
	CAPT3743*4A*	G*EC960603BNA*	34,200	25,400	14.0	11.5	1,150	7540120
	CAPT3743*4A*+EEP		34,600	25,600	14.5	11.5	1,200	7547385
	CAPT3743*4A*+MBVC1600**-1A*		34,000	25,200	14.5	11.5	1,205	7547386
CAPT3743*4A*+MBVC2000**-1A*		34,000	25,200	14.5	11.5	1,205	7547387	
CHPF3636B6C*+TXV	A*EC960403BNA*	34,200	25,400	14.0	11.5	1,050	10338614	
CHPF3642C6C*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7547403	
CHPF3642C6C*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7547408	
CHPF3642C6C*+EEP		33,600	25,600	14.0	11.5	1,075	7547390	
CHPF3642C6C*+EEP+TXV		33,600	25,600	14.0	11.5	1,075	7547391	
CHPF3642C6C*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7547392	
CHPF3642C6C*+TXV	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7547404	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0361K* (Contd.)	CHPF3642C6C*+TXV	G*E81005C*B*	34,000	25,200	14.5	12.0	1,230	7547409
	CHPF3642C6C*+TXV	G*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7547530
	CHPF3642C6C*+TXV	G*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7547528
	CHPF3642C6C*+TXV	G*E80603B*B*	33,400	24,800	14.5	11.5	1,250	7547401
	CHPF3642C6C*+TXV	A*EH800603B*A*	33,400	24,800	14.5	11.5	1,250	8953010
	CHPF3642C6C*+TXV	A*EC960603BNA*	34,200	25,400	14.5	11.5	1,150	7547532
	CHPF3642C6C*+TXV	A*EC960803BNA*	34,200	25,400	14.5	11.5	1,150	7547534
	CHPF3743C6B*	A*VC80805D*B*	33,600	25,600	14.5	11.5	1,100	9947475
	CHPF3743C6B*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547434
	CHPF3743C6B*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547519
	CHPF3743C6B*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7547448
	CHPF3743C6B*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7547416
	CHPF3743C6B*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547477
	CHPF3743C6B*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547453
	CHPF3743C6B*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547498
	CHPF3743C6B*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7547472
	CHPF3743C6B*	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540158
	CHPF3743C6B*	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540131
	CHPF3743C6B*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7547429
	CHPF3743C6B*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547421
	CHPF3743C6B*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547514
	CHPF3743C6B*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547493
	CHPF3743C6B*+EEP		33,000	25,200	14.0	11.5	1,075	7547393
	CHPF3743C6B*+EEP+TXV		33,000	25,200	14.5	11.5	1,075	7547394
	CHPF3743C6B*+MBVC1600**-1A*		35,000	26,000	14.5	11.5	1,200	7547395
	CHPF3743C6B*+TXV	A*VC80603B*B*	33,600	25,600	14.5	12.0	1,100	9947461
	CHPF3743C6B*+TXV	A*VC80803B*B*	33,600	25,600	14.5	12.0	1,150	9947466
	CHPF3743C6B*+TXV	A*VC80804C*B*	33,600	25,600	14.5	11.5	1,100	9947470
	CHPF3743C6B*+TXV	A*VC80805D*B*	33,600	25,600	14.5	12.0	1,100	9947476
	CHPF3743C6B*+TXV	G*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7547490
	CHPF3743C6B*+TXV	A*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7547473
	CHPF3743C6B*+TXV	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547515
	CHPF3743C6B*+TXV	G*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7547422
	CHPF3743C6B*+TXV	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7547426
	CHPF3743C6B*+TXV	G*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540133
	CHPF3743C6B*+TXV	A*EC961004CNA*	34,600	25,600	14.5	11.5	1,250	7540160
	CHPF3743C6B*+TXV	A*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7547469
	CHPF3743C6B*+TXV	A*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7547430
	CHPF3743C6B*+TXV	G*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7547417
	CHPF3743C6B*+TXV	A*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7547463
	CHPF3743C6B*+TXV	A*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7547508
	CHPF3743C6B*+TXV	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547520
	CHPF3743C6B*+TXV	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547494
	CHPF3743C6B*+TXV	G*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7547439
	CHPF3743C6B*+TXV	A*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7547511
	CHPF3743C6B*+TXV	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547499
	CHPF3743C6B*+TXV	G*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7547449
	CHPF3743C6B*+TXV	A*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7547466
CHPF3743C6B*+TXV	A*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7547478	
CHPF3743C6B*+TXV	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7547413	
CHPF3743C6B*+TXV	G*VC961005CNA*	34,600	25,600	14.5	12.0	1,175	7547454	
CHPF3743C6B*+TXV	G*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7547487	
CHPF3743C6B*+TXV	A*VC81005C*B*	33,400	24,800	14.5	12.0	1,200	7547435	
CHPF3743C6B*+TXV	G*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7547442	
CHPF3743C6B*+TXV	G*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7547445	
CHPF3743D6B*	G*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7540141	
CHPF3743D6B*	A*EC961205DNA*	34,000	25,200	14.5	11.5	1,075	7540168	
CHPF3743D6B*	A*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7547524	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0361K* (Contd.)	CHPF3743D6B*	A*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7547482
	CHPF3743D6B*	G*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7547458
	CHPF3743D6B*	G*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7547503
	CHPF3743D6B*+EEP		34,600	25,600	14.5	11.5	1,150	7547396
	CHPF3743D6B*+EEP+TXV		34,600	25,600	14.5	12.0	1,150	7547397
	CHPF3743D6B*+TXV	A*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7547483
	CHPF3743D6B*+TXV	A*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7547525
	CHPF3743D6B*+TXV	A*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7547535
	CHPF3743D6B*+TXV	G*EC961205DNA*	34,000	25,200	14.5	12.0	1,075	7547531
	CHPF3743D6B*+TXV	G*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7547459
	CHPF3743D6B*+TXV	G*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7547504
	CSCF4860N6D*	A*VC80805D*B*	33,600	25,600	14.5	11.5	1,200	9947477
	CSCF4860N6D*	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547500
	CSCF4860N6D*	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547423
	CSCF4860N6D*	A*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7547474
	CSCF4860N6D*	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547516
	CSCF4860N6D*	G*VC960804CNA*	34,600	25,600	14.5	11.5	1,190	7547450
	CSCF4860N6D*	G*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7547460
	CSCF4860N6D*	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7547405
	CSCF4860N6D*	G*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7547418
	CSCF4860N6D*	G*E81005C*B*	34,000	25,200	14.5	11.5	1,230	7547410
	CSCF4860N6D*	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547521
	CSCF4860N6D*	A*VC961205DNA*	34,600	25,600	14.5	11.5	1,200	7547484
	CSCF4860N6D*	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547436
	CSCF4860N6D*	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547455
	CSCF4860N6D*	G*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7547505
	CSCF4860N6D*	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547495
	CSCF4860N6D*	A*VM971205DNA*	34,600	25,600	14.5	11.5	1,200	7547526
	CSCF4860N6D*	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547479
	CSCF4860N6D*	A*VC80805C*B*	33,600	25,000	14.5	11.5	1,200	7547431
	CSCF4860N6D*+EEP		34,600	25,600	14.0	11.5	1,200	7547398
	CSCF4860N6D*+EEP+TXV		34,600	25,600	14.0	11.5	1,200	7547399
	CSCF4860N6D*+TXV	A*VC80603B*B*	33,400	25,400	14.5	11.5	1,200	9947462
	CSCF4860N6D*+TXV	A*VC80803B*B*	33,400	25,400	14.5	11.5	1,150	9947467
	CSCF4860N6D*+TXV	A*VC80804C*B*	33,600	25,600	14.5	11.5	1,250	9947471
	CSCF4860N6D*+TXV	A*VC80805D*B*	33,600	25,600	14.5	12.0	1,200	9947478
	CSCF4860N6D*+TXV	G*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7547414
	CSCF4860N6D*+TXV	G*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7547461
	CSCF4860N6D*+TXV	A*VC961205DNA*	34,600	25,600	14.5	12.0	1,200	7547485
	CSCF4860N6D*+TXV	A*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547517
	CSCF4860N6D*+TXV	G*E80805C*B*	33,600	25,000	14.5	11.5	1,210	7547406
	CSCF4860N6D*+TXV	A*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7547527
	CSCF4860N6D*+TXV	G*E81005C*B*	34,000	25,200	14.5	12.0	1,230	7547411
	CSCF4860N6D*+TXV	G*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547424
	CSCF4860N6D*+TXV	A*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7547432
	CSCF4860N6D*+TXV	G*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7547446
	CSCF4860N6D*+TXV	G*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7547443
	CSCF4860N6D*+TXV	G*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547501
CSCF4860N6D*+TXV	A*VC81005C*B*	33,400	24,800	14.5	11.5	1,200	7547437	
CSCF4860N6D*+TXV	G*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7547451	
CSCF4860N6D*+TXV	G*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7547491	
CSCF4860N6D*+TXV	A*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7547509	
CSCF4860N6D*+TXV	G*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547456	
CSCF4860N6D*+TXV	A*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7547464	
CSCF4860N6D*+TXV	G*E80603B*B*	33,400	24,800	14.5	11.5	1,250	7539947	
CSCF4860N6D*+TXV	A*VC960803BNA*	34,400	25,400	14.5	11.5	1,250	7547470	
CSCF4860N6D*+TXV	G*VM970804CNA*	34,600	25,600	14.5	11.5	1,190	7547496	
CSCF4860N6D*+TXV	G*VM971205DNA*	34,600	25,600	14.5	12.0	1,200	7547506	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0361K* (Contd.)	CSCF4860N6D*+TXV	G*VM970603BNA*	34,400	25,400	14.5	11.5	1,250	7547488
	CSCF4860N6D*+TXV	A*VC80604B*B*	33,600	25,000	14.5	11.5	1,220	7547427
	CSCF4860N6D*+TXV	G*VC960403BNA*	34,200	25,400	14.5	11.5	1,200	7547440
	CSCF4860N6D*+TXV	A*VM970803BNA*	34,400	25,400	14.5	11.5	1,250	7547512
	CSCF4860N6D*+TXV	G*VC80805C*B*	33,600	25,000	14.5	12.0	1,200	7547419
	CSCF4860N6D*+TXV	A*VM971005CNA*	34,600	25,600	14.5	11.5	1,175	7547522
	CSCF4860N6D*+TXV	A*VC960804CNA*	34,600	25,600	14.5	12.0	1,190	7547475
	CSCF4860N6D*+TXV	A*VC961005CNA*	34,600	25,600	14.5	11.5	1,175	7547480
	CSCF4860N6D*+TXV	A*VC960603BNA*	34,400	25,400	14.5	11.5	1,250	7547467
ASX14 0371K*	ARUF37C14A*+TXV		33,400	25,200	14.0	12.2	1,050	7989057
	ARUF37D14A*		34,200	25,800	14.0	12.2	1,240	8171744
	ARUF49C14A*		34,000	25,800	14.0	12.2	1,220	7989018
	ASPT35B14A*		32,400	24,527	14.0	12.2	1,050	10341531
	ASPT36C14A*		34,200	25,800	14.5	12.5	1,210	7540170
	ASPT37C14A*		34,200	25,800	14.5	12.2	1,120	8245636
	ASPT39C14B*		34,200	25,800	14.5	12.2	1,220	201834863
	ASPT47C14B*		34,200	25,800	14.5	12.2	1,120	201834864
	ASPT47D14A*		34,600	26,200	15.0	12.5	1,205	8245640
	AVPTC36C14A*		34,000	25,800	14.5	12.2	1,100	7540174
	AVPTC37C14A*		34,000	25,800	14.5	12.2	1,130	8996363
	AVPTC37D14A*		34,600	26,200	15.0	12.5	1,145	8996364
	AVPTC39C14A*		34,200	25,800	14.5	12.2	1,250	10221075
	AVPTC42D14A*		34,800	26,400	15.0	12.5	1,120	7540176
	AVPTC49D14A*		34,600	26,200	15.0	12.5	1,075	8996365
	AWUF37XX16B*+TXV		33,000	25,000	14.5	12.2	355	7540178
	CA*F3137*6A*	A*VC80603B*B*	33,400	26,000	14.5	12.2	1,100	9947479
	CA*F3137*6A*	A*VC80803B*B*	33,400	26,000	14.5	12.2	1,150	9947484
	CA*F3137*6A*	A*VC960403BNA*	34,000	25,800	15.0	12.5	1,200	7540412
	CA*F3137*6A*	A*VC960603BNA*	34,000	25,800	15.0	12.5	1,250	7540423
	CA*F3137*6A*	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7540223
	CA*F3137*6A*	G*VC960803BNA*	34,000	25,800	15.0	12.5	1,250	7540356
	CA*F3137*6A*	A*VM970603BNA*	34,000	25,800	15.0	12.5	1,250	7540579
	CA*F3137*6A*	A*VC80604B*B*	33,600	25,400	15.0	12.5	1,220	7540308
	CA*F3137*6A*	G*VC80604B*B*	33,600	25,400	15.0	12.5	1,220	7540263
	CA*F3137*6A*	G*VC960403BNA*	34,000	25,800	15.0	12.5	1,200	7540341
	CA*F3137*6A*	G*VC960603BNA*	34,000	25,800	15.0	12.5	1,250	7540350
	CA*F3137*6A*	A*VM970803BNA*	34,000	25,800	15.0	12.5	1,250	7540590
	CA*F3137*6A*	G*VM970803BNA*	34,000	25,800	15.0	12.5	1,250	7540513
	CA*F3137*6A*	A*VC960803BNA*	34,000	25,800	15.0	12.5	1,250	7540435
	CA*F3137*6A*	G*VM970603BNA*	34,000	25,800	15.0	12.5	1,250	7540502
	CA*F3137*6A*+EEP		34,000	25,800	14.0	12.2	1,100	7540179
	CA*F3137*6A*+EEP+TXV		34,000	25,800	14.0	12.2	1,100	7540181
	CA*F3743*6D*	A*VC80805D*B*	33,600	26,200	14.5	12.2	1,200	9947493
	CA*F3743*6D*	A*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7540623
	CA*F3743*6D*	G*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7540297
	CA*F3743*6D*	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540641
	CA*F3743*6D*	A*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7540450
	CA*F3743*6D*	A*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7540331
	CA*F3743*6D*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7540248
	CA*F3743*6D*	G*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7540677
	CA*F3743*6D*	G*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7540366
	CA*F3743*6D*	G*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7540527
CA*F3743*6D*	G*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7540546	
CA*F3743*6D*	A*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7540714	
CA*F3743*6D*	A*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7540605	
CA*F3743*6D*	A*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7540469	
CA*F3743*6D*	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540565	
CA*F3743*6D*	G*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7540380	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0371K* (Contd.)	CA*F3743*6D*	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540488
	CA*F3743*6D*	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540397
	CA*F3743*6D*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540659
	CA*F3743*6D*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540696
	CA*F3743*6D*	A*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7540318
	CA*F3743*6D*	G*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7540278
	CA*F3743*6D*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7540231
	CA*F3743*6D*+EEP		34,000	25,800	14.0	12.2	1,200	7540183
	CA*F3743*6D*+EEP+TXV		34,000	25,800	14.5	12.2	1,200	7540185
	CA*F3743*6D*+MBVC1600**-1A*		34,600	26,200	14.5	12.2	1,200	7540187
	CA*F3743*6D*+MBVC1600**-1A*+TXV		34,600	26,200	14.5	12.2	1,200	7540189
	CA*F3743*6D*+MBVC2000**-1A*		34,600	26,200	15.0	12.5	1,200	7540191
	CA*F3743*6D*+MBVC2000**-1A*+TXV		34,600	26,200	15.0	12.5	1,200	7540193
	CA*F3743*6D*+TXV	A*VC80603B*B*	33,400	26,000	14.5	12.2	1,100	9947480
	CA*F3743*6D*+TXV	A*VC80803B*B*	33,400	26,000	14.5	12.2	1,150	9947485
	CA*F3743*6D*+TXV	A*VC80804C*B*	33,600	26,200	14.5	12.2	1,250	9947489
	CA*F3743*6D*+TXV	A*VC80805D*B*	33,600	26,200	15.0	12.5	1,200	9947494
	CA*F3743*6D*+TXV	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540265
	CA*F3743*6D*+TXV	G*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7540382
	CA*F3743*6D*+TXV	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540309
	CA*F3743*6D*+TXV	A*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7540592
	CA*F3743*6D*+TXV	A*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7540625
	CA*F3743*6D*+TXV	A*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7540452
	CA*F3743*6D*+TXV	G*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7540548
	CA*F3743*6D*+TXV	G*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7540515
	CA*F3743*6D*+TXV	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7540225
	CA*F3743*6D*+TXV	G*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7540504
	CA*F3743*6D*+TXV	G*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7540281
	CA*F3743*6D*+TXV	G*E81005C*B*	34,000	25,800	15.0	12.5	1,200	7540250
	CA*F3743*6D*+TXV	G*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7540358
	CA*F3743*6D*+TXV	G*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7540351
	CA*F3743*6D*+TXV	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7540332
	CA*F3743*6D*+TXV	G*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7540369
	CA*F3743*6D*+TXV	A*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7540581
	CA*F3743*6D*+TXV	A*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7540607
	CA*F3743*6D*+TXV	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540567
	CA*F3743*6D*+TXV	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7540299
	CA*F3743*6D*+TXV	A*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7540426
	CA*F3743*6D*+TXV	A*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7540698
	CA*F3743*6D*+TXV	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540643
	CA*F3743*6D*+TXV	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540399
	CA*F3743*6D*+TXV	A*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7540471
	CA*F3743*6D*+TXV	A*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7540716
	CA*F3743*6D*+TXV	G*E80805C*B*	33,600	25,400	15.0	12.5	1,210	7540233
	CA*F3743*6D*+TXV	G*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7540343
	CA*F3743*6D*+TXV	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540490
	CA*F3743*6D*+TXV	G*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7540661
	CA*F3743*6D*+TXV	G*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7540529
	CA*F3743*6D*+TXV	A*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7540437
	CA*F3743*6D*+TXV	G*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7540679
CA*F3743*6D*+TXV	A*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7540414	
CA*F3743*6D*+TXV	A*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7540320	
CAPT3743*4A*	A*VC80603B*B*	33,600	26,200	15.0	12.2	1,100	9947481	
CAPT3743*4A*	A*VC80803B*B*	33,600	26,200	15.0	12.2	1,150	9947486	
CAPT3743*4A*	A*VC80804C*B*	33,600	26,200	14.5	12.2	1,250	9947490	
CAPT3743*4A*	A*VC80805D*B*	33,600	26,200	15.0	12.2	1,200	9947495	
CAPT3743*4A*	A*VC80805C*B*	33,600	25,400	15.0	12.2	1,200	7540322	
CAPT3743*4A*	G*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7540506	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
ASX14 0371K* (Contd.)	CAPT3743*4A*	A*VM970804CNA*	34,600	26,200	15.0	12.2	1,190	7540609	
	CAPT3743*4A*	G*VC960804CNA*	34,600	26,200	15.0	12.2	1,190	7540370	
	CAPT3743*4A*	G*VC960603BNA*	34,200	25,800	14.5	12.2	1,250	7540352	
	CAPT3743*4A*	G*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7540345	
	CAPT3743*4A*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540663	
	CAPT3743*4A*	A*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7540718	
	CAPT3743*4A*	A*VM970803BNA*	34,200	25,800	14.5	12.2	1,250	7540594	
	CAPT3743*4A*	G*VM970804CNA*	34,600	26,200	15.0	12.2	1,190	7540531	
	CAPT3743*4A*	G*VC80805C*B*	33,600	25,400	15.0	12.2	1,200	7540283	
	CAPT3743*4A*	A*VC960804CNA*	34,600	26,200	15.0	12.2	1,190	7540455	
	CAPT3743*4A*	G*EC961205DNA*	34,400	26,000	15.0	12.5	1,075	7540681	
	CAPT3743*4A*	A*VC960603BNA*	34,200	25,800	14.5	12.2	1,250	7540428	
	CAPT3743*4A*	A*VC961205DNA*	34,400	26,000	15.0	12.5	1,200	7540492	
	CAPT3743*4A*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540700	
	CAPT3743*4A*	A*VC961005CNA*	34,600	26,200	15.0	12.2	1,175	7540473	
	CAPT3743*4A*	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540267	
	CAPT3743*4A*	A*VM971005CNA*	34,600	26,200	15.0	12.2	1,175	7540627	
	CAPT3743*4A*	G*VM971205DNA*	34,400	26,000	15.0	12.5	1,200	7540569	
	CAPT3743*4A*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7540252	
	CAPT3743*4A*	A*VM971205DNA*	34,400	26,000	15.0	12.5	1,200	7540645	
	CAPT3743*4A*	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540311	
	CAPT3743*4A*	G*VM971005CNA*	34,600	26,200	15.0	12.2	1,175	7540550	
	CAPT3743*4A*	G*VC961205DNA*	34,400	26,000	15.0	12.5	1,200	7540401	
	CAPT3743*4A*	G*VM970803BNA*	34,200	25,800	14.5	12.2	1,250	7540517	
	CAPT3743*4A*	G*VC81005C*B*	33,400	25,200	15.0	12.2	1,200	7540301	
	CAPT3743*4A*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7540235	
	CAPT3743*4A*	A*VM970603BNA*	34,200	25,800	14.5	12.2	1,250	7540583	
	CAPT3743*4A*	G*VC960803BNA*	34,200	25,800	14.5	12.2	1,250	7540359	
	CAPT3743*4A*	A*VC81005C*B*	33,400	25,200	15.0	12.2	1,200	7540334	
	CAPT3743*4A*	A*VC960403BNA*	34,000	25,800	14.5	12.2	1,200	7540417	
	CAPT3743*4A*	A*VC960803BNA*	34,200	25,800	14.5	12.2	1,250	7540439	
	CAPT3743*4A*	G*VC961005CNA*	34,600	26,200	15.0	12.2	1,175	7540384	
	CAPT3743*4A*+EEP			34,000	25,800	14.5	12.2	1,200	7540194
	CAPT3743*4A*+MBVC1600**-1A*			34,200	25,800	14.5	12.2	1,200	7540196
	CAPT3743*4A*+MBVC2000**-1A*			34,200	25,800	14.5	12.2	1,200	7540200
	CHPF3642C6C*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7540237	
	CHPF3642C6C*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7540254	
	CHPF3642C6C*+EEP			33,000	25,800	14.0	12.2	1,075	7540204
	CHPF3642C6C*+EEP+TXV			33,000	25,800	14.0	12.2	1,075	7540206
	CHPF3642C6C*+MBVC1600**-1A*			34,000	25,800	14.5	12.2	1,200	7540208
	CHPF3642C6C*+MBVC1600**-1A*+TXV			34,000	25,800	15.0	12.5	1,200	7540210
	CHPF3642C6C*+TXV	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7540227	
	CHPF3642C6C*+TXV	G*E80805C*B*	33,600	25,400	15.0	12.5	1,210	7540239	
	CHPF3642C6C*+TXV	G*E81005C*B*	34,000	25,800	15.0	12.5	1,200	7540257	
	CHPF3743C6B*+MBVC1600**-1A*			34,600	26,200	14.5	12.2	1,200	7540211
	CHPF3743C6B*+MBVC1600**-1A*+TXV			34,600	26,200	15.0	12.5	1,200	7540213
	CHPF3743C6B*+TXV	A*VC80603B*B*	33,600	26,200	15.0	12.5	1,100	9947482	
	CHPF3743C6B*+TXV	A*VC80803B*B*	33,600	26,200	15.0	12.5	1,050	9947487	
	CHPF3743C6B*+TXV	A*VC80804C*B*	33,600	26,200	14.5	12.2	1,100	9947491	
	CHPF3743C6B*+TXV	A*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7540596	
CHPF3743C6B*+TXV	G*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7540509		
CHPF3743C6B*+TXV	G*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7540353		
CHPF3743C6B*+TXV	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540270		
CHPF3743C6B*+TXV	G*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7540361		
CHPF3743C6B*+TXV	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540312		
CHPF3743C6B*+TXV	A*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7540419		
CHPF3743C6B*+TXV	G*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7540519		
CHPF3743C6B*+TXV	A*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7540585		

See Notes on Page 78.



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0371K* (Contd.)	CHPF3743C6B*+TXV	G*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7540346
	CHPF3743C6B*+TXV	A*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7540430
	CHPF3743C6B*+TXV	A*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7540441
	CHPF3743D6B*	A*VC80805D*B*	33,600	26,200	14.5	12.2	1200	9947496
	CHPF3743D6B*	A*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7540475
	CHPF3743D6B*	G*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7540302
	CHPF3743D6B*	G*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7540385
	CHPF3743D6B*	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540683
	CHPF3743D6B*	A*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7540323
	CHPF3743D6B*	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540647
	CHPF3743D6B*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540665
	CHPF3743D6B*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540702
	CHPF3743D6B*	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540571
	CHPF3743D6B*	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540494
	CHPF3743D6B*	A*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7540335
	CHPF3743D6B*	G*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7540552
	CHPF3743D6B*	G*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7540534
	CHPF3743D6B*	A*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7540457
	CHPF3743D6B*	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540720
	CHPF3743D6B*	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540403
	CHPF3743D6B*	G*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7540285
	CHPF3743D6B*	G*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7540371
	CHPF3743D6B*	A*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7540629
	CHPF3743D6B*	A*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7540611
	CHPF3743D6B*+EEP		34,600	26,200	14.5	12.2	1,150	7540215
	CHPF3743D6B*+EEP+TXV		34,600	26,200	15.0	12.5	1,150	7540217
	CHPF3743D6B*+TXV	A*VC80805D*B*	33,600	26,200	15.0	12.5	1200	9947497
	CHPF3743D6B*+TXV	A*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7540324
	CHPF3743D6B*+TXV	G*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7540372
	CHPF3743D6B*+TXV	A*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7540631
	CHPF3743D6B*+TXV	G*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7540667
	CHPF3743D6B*+TXV	A*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7540704
	CHPF3743D6B*+TXV	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540405
	CHPF3743D6B*+TXV	G*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7540554
	CHPF3743D6B*+TXV	G*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7540287
	CHPF3743D6B*+TXV	A*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7540459
	CHPF3743D6B*+TXV	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540649
	CHPF3743D6B*+TXV	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7540303
	CHPF3743D6B*+TXV	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7540337
	CHPF3743D6B*+TXV	A*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7540477
	CHPF3743D6B*+TXV	A*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7540613
	CHPF3743D6B*+TXV	G*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7540387
	CHPF3743D6B*+TXV	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540573
	CHPF3743D6B*+TXV	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540496
	CHPF3743D6B*+TXV	G*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7540536
	CHPF3743D6B*+TXV	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540722
	CHPF3743D6B*+TXV	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540685
	CSCF4860N6D*	A*VC80805D*B*	33,600	26,200	14.5	12.2	1200	9947498
	CSCF4860N6D*	A*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540706
	CSCF4860N6D*	A*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7540479
CSCF4860N6D*	A*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7540615	
CSCF4860N6D*	A*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7540325	
CSCF4860N6D*	A*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7540339	
CSCF4860N6D*	G*VC961005CNA*	34,600	26,200	14.5	12.2	1,175	7540389	
CSCF4860N6D*	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540651	
CSCF4860N6D*	G*E81005C*B*	34,000	25,800	14.5	12.2	1,200	7540259	
CSCF4860N6D*	G*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7540556	
CSCF4860N6D*	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540687	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0371K* (Contd.)	CSCF4860N6D*	A*VM971005CNA*	34,600	26,200	14.5	12.2	1,175	7540633
	CSCF4860N6D*	G*VC80805C*B*	33,600	25,400	14.5	12.2	1,200	7540289
	CSCF4860N6D*	G*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7540374
	CSCF4860N6D*	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540724
	CSCF4860N6D*	G*EC961004CNA*	34,600	26,200	14.5	12.2	1,250	7540669
	CSCF4860N6D*	G*VM970804CNA*	34,600	26,200	14.5	12.2	1,190	7540538
	CSCF4860N6D*	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540408
	CSCF4860N6D*	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540575
	CSCF4860N6D*	G*E80805C*B*	33,600	25,400	14.5	12.2	1,210	7540241
	CSCF4860N6D*	G*VC81005C*B*	33,400	25,200	14.5	12.2	1,200	7540305
	CSCF4860N6D*	A*VC960804CNA*	34,600	26,200	14.5	12.2	1,190	7540461
	CSCF4860N6D*	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540498
	CSCF4860N6D*+EEP		34,600	26,200	14.0	12.2	1,200	7540219
	CSCF4860N6D*+EEP+TXV		34,600	26,200	14.5	12.2	1,200	7540221
	CSCF4860N6D*+TXV	A*VC80603B*B*	33,400	26,000	14.5	12.2	1,100	9947483
	CSCF4860N6D*+TXV	A*VC80803B*B*	33,400	26,000	14.5	12.2	1,150	9947488
	CSCF4860N6D*+TXV	A*VC80804C*B*	33,600	26,200	14.5	12.2	1,250	9947492
	CSCF4860N6D*+TXV	A*VC80805D*B*	33,600	26,200	15.0	12.5	1,200	9947499
	CSCF4860N6D*+TXV	G*E81005C*B*	34,000	25,800	15.0	12.5	1,200	7540261
	CSCF4860N6D*+TXV	A*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7540635
	CSCF4860N6D*+TXV	G*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540689
	CSCF4860N6D*+TXV	G*VM971005CNA*	34,600	26,200	15.0	12.5	1,175	7540558
	CSCF4860N6D*+TXV	G*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7540291
	CSCF4860N6D*+TXV	A*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7540421
	CSCF4860N6D*+TXV	G*E80805C*B*	33,600	25,400	15.0	12.5	1,210	7540243
	CSCF4860N6D*+TXV	A*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540500
	CSCF4860N6D*+TXV	A*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7540588
	CSCF4860N6D*+TXV	G*VC961205DNA*	34,600	26,200	15.0	12.5	1,200	7540410
	CSCF4860N6D*+TXV	G*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7540521
	CSCF4860N6D*+TXV	G*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7540376
	CSCF4860N6D*+TXV	A*VC960804CNA*	34,600	26,200	15.0	12.5	1,190	7540463
	CSCF4860N6D*+TXV	G*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7540671
	CSCF4860N6D*+TXV	G*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540272
	CSCF4860N6D*+TXV	G*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7540307
	CSCF4860N6D*+TXV	G*VM970603BNA*	34,400	26,000	14.5	12.2	1,250	7540511
	CSCF4860N6D*+TXV	G*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7540355
	CSCF4860N6D*+TXV	G*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7540540
	CSCF4860N6D*+TXV	A*VC80805C*B*	33,600	25,400	15.0	12.5	1,200	7540327
	CSCF4860N6D*+TXV	A*EC961205DNA*	34,200	25,800	15.0	12.5	1,075	7540726
	CSCF4860N6D*+TXV	A*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7540481
CSCF4860N6D*+TXV	A*VM970803BNA*	34,400	26,000	14.5	12.2	1,250	7540598	
CSCF4860N6D*+TXV	G*E80603B*B*	33,400	25,200	14.5	12.2	1,225	7540229	
CSCF4860N6D*+TXV	G*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540577	
CSCF4860N6D*+TXV	G*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7540363	
CSCF4860N6D*+TXV	A*EC961004CNA*	34,600	26,200	15.0	12.5	1,250	7540708	
CSCF4860N6D*+TXV	A*VC81005C*B*	33,400	25,200	15.0	12.5	1,200	7540340	
CSCF4860N6D*+TXV	A*VM971205DNA*	34,600	26,200	15.0	12.5	1,200	7540653	
CSCF4860N6D*+TXV	A*VM970804CNA*	34,600	26,200	15.0	12.5	1,190	7540617	
CSCF4860N6D*+TXV	A*VC80604B*B*	33,600	25,400	14.5	12.2	1,220	7540314	
CSCF4860N6D*+TXV	G*VC961005CNA*	34,600	26,200	15.0	12.5	1,175	7540391	
CSCF4860N6D*+TXV	G*VC960403BNA*	34,200	25,800	14.5	12.2	1,200	7540348	
CSCF4860N6D*+TXV	A*VC960603BNA*	34,400	26,000	14.5	12.2	1,250	7540432	
CSCF4860N6D*+TXV	A*VC960803BNA*	34,400	26,000	14.5	12.2	1,250	7540444	
ASX14 0421K*	ARUF43D14A*		37,400	29,600	14.0	11.5	1,270	8171745
	ARUF43D14A*+TXV		37,600	29,800	14.0	11.5	1,270	8171746
	ARUF47D14A*		37,600	29,800	14.0	11.5	1,375	7989019
	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8245642
	ASPT49C14A*		36,200	28,600	14.0	12.0	1,355	10221035

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0421K* (Contd.)	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8245643
	ASPT59C14A*		38,000	30,000	14.0	12.0	1,260	8245645
	AVPTC48D14A*		38,000	30,000	15.0	12.5	1,310	7540732
	AVPTC49C14A*		36,200	28,600	14.0	12.0	1,300	10221076
	AVPTC49D14A*		38,500	30,400	15.0	12.5	1,320	8996367
	AVPTC59C14A*		38,000	30,000	14.0	12.0	1,290	8996366
	CA*F4860*6D*	A*VC80805D*B*	38,000	31,000	14.0	11.5	1,350	9947500
	CA*F4860*6D*	A*VM971205DNA*	38,000	30,000	14.0	11.5	1,300	7541089
	CA*F4860*6D*	G*VC960804CNA*	38,000	30,000	14.0	11.5	1,385	7540892
	CA*F4860*6D*	G*E80805D*A*	38,000	30,000	14.0	11.5	1,425	7540804
	CA*F4860*6D*	A*VC961005CNA*	38,000	30,000	14.0	11.5	1,300	7540964
	CA*F4860*6D*	A*VC961205DNA*	38,000	30,000	14.0	11.5	1,425	7540982
	CA*F4860*6D*	A*VC81005C*B*	38,000	30,000	14.0	11.5	1,370	7540874
	CA*F4860*6D*	G*E81005C*B*	38,000	30,000	14.0	11.5	1,425	7540786
	CA*F4860*6D*	G*VM971205DNA*	38,000	30,000	14.0	11.5	1,300	7541038
	CA*F4860*6D*	G*VC961205DNA*	38,000	30,000	14.0	11.5	1,425	7540928
	CA*F4860*6D*	G*EC961205DNA*	38,000	30,000	14.0	11.5	1,400	7541121
	CA*F4860*6D*	A*EC961004CNA*	38,000	30,000	14.0	11.5	1,275	7541137
	CA*F4860*6D*	G*VC81005C*B*	38,000	30,000	14.0	11.5	1,370	7540838
	CA*F4860*6D*	A*VC80805C*B*	38,000	30,000	14.0	11.5	1,400	7540856
	CA*F4860*6D*	G*VM970804CNA*	38,000	30,000	14.0	11.5	1,425	7541001
	CA*F4860*6D*	G*VC80805C*B*	38,000	30,000	14.0	11.5	1,400	7540820
	CA*F4860*6D*	A*VM971005CNA*	38,000	30,000	14.0	11.5	1,300	7541072
	CA*F4860*6D*	A*EC961205DNA*	38,000	30,000	14.0	11.5	1,400	7541153
	CA*F4860*6D*	G*EC961004CNA*	38,000	30,000	14.0	11.5	1,275	7541106
	CA*F4860*6D*	G*E80805C*B*	38,000	30,000	14.0	11.5	1,425	7540768
	CA*F4860*6D*	G*VM971005CNA*	38,000	30,000	14.0	11.5	1,300	7541021
	CA*F4860*6D*	A*VM970804CNA*	38,000	30,000	14.0	11.5	1,425	7541054
	CA*F4860*6D*	G*VC961005CNA*	38,000	30,000	14.0	11.5	1,300	7540910
	CA*F4860*6D*	A*VC960804CNA*	38,000	30,000	14.0	11.5	1,385	7540946
	CA*F4860*6D*+EEP		38,000	30,000	14.0	11.5	1,400	7540734
	CA*F4860*6D*+EEP+TXV		38,000	30,000	14.0	11.5	1,400	7540736
	CA*F4860*6D*+MBVC1600**-1A*		38,000	30,000	14.5	11.5	1,300	7540738
	CA*F4860*6D*+MBVC2000**-1A*		38,000	30,000	14.5	11.5	1,300	7540740
	CA*F4860*6D*+TXV	A*VC80805D*B*	38,000	31,000	14.5	11.5	1,350	9947501
	CA*F4860*6D*+TXV	A*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7540984
	CA*F4860*6D*+TXV	G*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7541023
	CA*F4860*6D*+TXV	A*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7541074
	CA*F4860*6D*+TXV	G*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7540894
	CA*F4860*6D*+TXV	G*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7540912
	CA*F4860*6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7540948
	CA*F4860*6D*+TXV	G*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7541039
	CA*F4860*6D*+TXV	G*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7540840
	CA*F4860*6D*+TXV	A*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7540876
	CA*F4860*6D*+TXV	A*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7540858
	CA*F4860*6D*+TXV	A*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7541056
	CA*F4860*6D*+TXV	A*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7541091
	CA*F4860*6D*+TXV	G*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7540822
	CA*F4860*6D*+TXV	A*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7540966
	CA*F4860*6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	11.5	1,425	7540806
CA*F4860*6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	11.5	1,400	7541123	
CA*F4860*6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	11.5	1,275	7541139	
CA*F4860*6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	11.5	1,275	7541108	
CA*F4860*6D*+TXV	G*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7540930	
CA*F4860*6D*+TXV	G*E80805C*B*	38,000	30,000	14.5	11.5	1,425	7540770	
CA*F4860*6D*+TXV	G*E81005C*B*	38,000	30,000	14.5	11.5	1,425	7540787	
CA*F4860*6D*+TXV	G*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7541003	
CA*F4860*6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	11.5	1,400	7541155	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0421K* (Contd.)	CA*F4961*6D*	A*VC80805D*B*	39,000	31,800	14.5	12.2	1350	9947502
	CA*F4961*6D*	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7540986
	CA*F4961*6D*	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7541157
	CA*F4961*6D*	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7541041
	CA*F4961*6D*	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7541092
	CA*F4961*6D*	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	7540789
	CA*F4961*6D*	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7540896
	CA*F4961*6D*	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7541005
	CA*F4961*6D*	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7541110
	CA*F4961*6D*	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	7540808
	CA*F4961*6D*	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7540950
	CA*F4961*6D*	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7541141
	CA*F4961*6D*	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7540824
	CA*F4961*6D*	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7541125
	CA*F4961*6D*	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7541076
	CA*F4961*6D*	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7540914
	CA*F4961*6D*	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7540860
	CA*F4961*6D*	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7540932
	CA*F4961*6D*	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	7540772
	CA*F4961*6D*	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7541058
	CA*F4961*6D*	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7540878
	CA*F4961*6D*	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7541025
	CA*F4961*6D*	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7540842
	CA*F4961*6D*	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7540968
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	7540742
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	7540744
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7540746
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7540748
	CA*F4961*6D*+TXV	A*VC80805D*B*	39,000	31,800	14.5	12.2	1350	9947503
	CA*F4961*6D*+TXV	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7541026
	CA*F4961*6D*+TXV	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7541008
	CA*F4961*6D*+TXV	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7541159
	CA*F4961*6D*+TXV	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7540916
	CA*F4961*6D*+TXV	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	7540791
	CA*F4961*6D*+TXV	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7541043
	CA*F4961*6D*+TXV	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	7540774
	CA*F4961*6D*+TXV	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7541143
	CA*F4961*6D*+TXV	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7540862
	CA*F4961*6D*+TXV	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	7541078
	CA*F4961*6D*+TXV	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7540952
	CA*F4961*6D*+TXV	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	7541112
	CA*F4961*6D*+TXV	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7540844
	CA*F4961*6D*+TXV	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	7541094
	CA*F4961*6D*+TXV	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	7540880
	CA*F4961*6D*+TXV	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	7540809
	CA*F4961*6D*+TXV	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	7540898
	CA*F4961*6D*+TXV	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	7541060
CA*F4961*6D*+TXV	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	7540826	
CA*F4961*6D*+TXV	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7540934	
CA*F4961*6D*+TXV	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	7541127	
CA*F4961*6D*+TXV	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	7540988	
CA*F4961*6D*+TXV	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	7540970	
CAPT4961*4A*	A*VC80805D*B*	39,000	31,800	14.5	11.5	1350	9947504	
CAPT4961*4A*	G*VC81005C*B*	39,000	30,800	14.5	11.5	1,370	7540846	
CAPT4961*4A*	G*VM970804CNA*	39,000	30,800	14.5	11.5	1,430	7541010	
CAPT4961*4A*	G*VM971005CNA*	39,000	30,800	14.5	11.5	1,300	7541028	
CAPT4961*4A*	G*VC961005CNA*	39,000	30,800	14.5	11.5	1,300	7540918	
CAPT4961*4A*	A*VC961005CNA*	39,000	30,800	14.5	11.5	1,300	7540972	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
	CAPT4961*4A*	A*VC960804CNA*	39,000	30,800	14.5	11.5	1,385	7540954
	CAPT4961*4A*	G*E80805C*B*	39,000	30,800	14.5	11.5	1,425	7540776
	CAPT4961*4A*	A*VM971005CNA*	39,000	30,800	14.5	11.5	1,300	7541079
	CAPT4961*4A*	G*E81005C*B*	39,000	30,800	14.5	11.5	1,425	7540793
	CAPT4961*4A*	G*VC960804CNA*	39,000	30,800	14.5	11.5	1,385	7540900
	CAPT4961*4A*	A*VC81005C*B*	39,000	30,800	14.5	11.5	1,370	7540882
	CAPT4961*4A*	A*VC80805C*B*	39,000	30,800	14.5	11.5	1,425	7540864
	CAPT4961*4A*	A*VM971205DNA*	39,000	30,800	14.5	11.5	1,300	7541096
	CAPT4961*4A*	A*VM970804CNA*	39,000	30,800	14.5	11.5	1,430	7541062
	CAPT4961*4A*	G*VM971205DNA*	39,000	30,800	14.5	11.5	1,300	7541045
	CAPT4961*4A*	G*VC961205DNA*	39,000	30,800	14.5	11.5	1,450	7540936
	CAPT4961*4A*	A*VC961205DNA*	39,000	30,800	14.5	11.5	1,450	7540990
	CAPT4961*4A*	G*VC80805C*B*	39,000	30,800	14.5	11.5	1,425	7540828
	CAPT4961*4A*+EEP		39,000	30,800	14.0	11.5	1,275	7540750
	CAPT4961*4A*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	7540752
	CAPT4961*4A*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	7540754
	CHPF4860D6D*	A*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9947505
	CHPF4860D6D*	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7540830
	CHPF4860D6D*	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7541064
	CHPF4860D6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7541129
	CHPF4860D6D*	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7541081
	CHPF4860D6D*	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7541012
	CHPF4860D6D*	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7540956
	CHPF4860D6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7541114
	CHPF4860D6D*	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7541030
	CHPF4860D6D*	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	7540812
	CHPF4860D6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7541145
	CHPF4860D6D*	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7541098
	CHPF4860D6D*	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7540902
	CHPF4860D6D*	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7540920
	CHPF4860D6D*	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7540992
	CHPF4860D6D*	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7540974
	CHPF4860D6D*	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7540938
	CHPF4860D6D*	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7541047
	CHPF4860D6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7541161
	CHPF4860D6D*	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7540884
	CHPF4860D6D*	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7540866
	CHPF4860D6D*	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7540848
	CHPF4860D6D*	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	7540795
	CHPF4860D6D*	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	7540778
	CHPF4860D6D*+EEP		38,000	30,000	14.0	12.0	1,425	7540756
	CHPF4860D6D*+EEP+TXV		38,000	30,000	14.0	12.2	1,425	7540758
	CHPF4860D6D*+MBVC1600**-1A*		38,000	30,000	14.5	12.2	1,400	7540760
	CHPF4860D6D*+MBVC2000**-1A*		38,000	30,000	14.5	12.2	1,400	7540762
	CHPF4860D6D*+TXV	A*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9947506
	CHPF4860D6D*+TXV	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	7540780
	CHPF4860D6D*+TXV	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7541049
	CHPF4860D6D*+TXV	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7540904
	CHPF4860D6D*+TXV	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	7541100
	CHPF4860D6D*+TXV	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7540850
	CHPF4860D6D*+TXV	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7541066
	CHPF4860D6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	7540814
	CHPF4860D6D*+TXV	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	7541014
	CHPF4860D6D*+TXV	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7540868
	CHPF4860D6D*+TXV	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	7540797
	CHPF4860D6D*+TXV	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7540922
	CHPF4860D6D*+TXV	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	7540832
	CHPF4860D6D*+TXV	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7540994

ASX14  
0421K\*  
(Contd.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #	
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>			
ASX14 0421K* (Contd.)	CHPF4860D6D*+TXV	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	7540976	
	CHPF4860D6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	7540958	
	CHPF4860D6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7541163	
	CHPF4860D6D*+TXV	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	7540886	
	CHPF4860D6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7541147	
	CHPF4860D6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7541131	
	CHPF4860D6D*+TXV	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7541083	
	CHPF4860D6D*+TXV	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	7540940	
	CHPF4860D6D*+TXV	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	7541032	
	CHPF4860D6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7541116	
	CSCF4860N6D*	A*VC80805D*B*	38,000	31,000	14.5	11.5	1,350	9947507	
	CSCF4860N6D*	G*E80805D*A*	38,000	30,000	14.5	11.5	1,425	7540816	
	CSCF4860N6D*	G*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7540906	
	CSCF4860N6D*	G*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7541034	
	CSCF4860N6D*	G*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7541016	
	CSCF4860N6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7541165	
	CSCF4860N6D*	A*VM970804CNA*	38,000	30,000	14.5	11.5	1,425	7541067	
	CSCF4860N6D*	A*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7540960	
	CSCF4860N6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7541117	
	CSCF4860N6D*	G*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7540834	
	CSCF4860N6D*	A*VM971005CNA*	38,000	30,000	14.5	11.5	1,300	7541085	
	CSCF4860N6D*	A*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7541102	
	CSCF4860N6D*	A*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7540978	
	CSCF4860N6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	7541150	
	CSCF4860N6D*	G*E80805C*B*	38,000	30,000	14.5	11.5	1,425	7540782	
	CSCF4860N6D*	G*VC961005CNA*	38,000	30,000	14.5	11.5	1,300	7540924	
	CSCF4860N6D*	G*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7540942	
	CSCF4860N6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	7541132	
	CSCF4860N6D*	A*VC80805C*B*	38,000	30,000	14.5	11.5	1,400	7540870	
	CSCF4860N6D*	G*VM971205DNA*	38,000	30,000	14.5	11.5	1,300	7541051	
	CSCF4860N6D*	G*E81005C*B*	38,000	30,000	14.5	11.5	1,425	7540800	
	CSCF4860N6D*	A*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7540888	
	CSCF4860N6D*	A*VC961205DNA*	38,000	30,000	14.5	11.5	1,425	7540997	
	CSCF4860N6D*	G*VC81005C*B*	38,000	30,000	14.5	11.5	1,370	7540852	
	CSCF4860N6D*+EEP			38,000	30,000	14.0	11.5	1,425	7540764
	CSCF4860N6D*+EEP+TXV			38,000	30,000	14.0	11.5	1,425	7540766
	CSCF4860N6D*+TXV	A*VC80805D*B*		38,000	31,000	14.5	11.5	1,350	9947508
	CSCF4860N6D*+TXV	G*EC961205DNA*		38,000	30,000	14.5	12.2	1,400	7541134
	CSCF4860N6D*+TXV	G*VC961205DNA*		38,000	30,000	14.5	11.5	1,425	7540944
	CSCF4860N6D*+TXV	A*VM971005CNA*		38,000	30,000	14.5	11.5	1,300	7541087
	CSCF4860N6D*+TXV	G*VM971005CNA*		38,000	30,000	14.5	11.5	1,300	7541036
	CSCF4860N6D*+TXV	G*VC80805C*B*		38,000	30,000	14.5	11.5	1,400	7540836
	CSCF4860N6D*+TXV	A*VM970804CNA*		38,000	30,000	14.5	11.5	1,425	7541070
	CSCF4860N6D*+TXV	A*VC80805C*B*		38,000	30,000	14.5	11.5	1,400	7540872
	CSCF4860N6D*+TXV	A*EC961004CNA*		38,000	30,000	14.5	12.2	1,275	7541152
	CSCF4860N6D*+TXV	A*VM971205DNA*		38,000	30,000	14.5	11.5	1,300	7541104
	CSCF4860N6D*+TXV	G*VC960804CNA*		38,000	30,000	14.5	11.5	1,385	7540908
	CSCF4860N6D*+TXV	G*VM971205DNA*		38,000	30,000	14.5	11.5	1,300	7541053
CSCF4860N6D*+TXV	A*VC961205DNA*		38,000	30,000	14.5	11.5	1,425	7540999	
CSCF4860N6D*+TXV	G*E80805C*B*		38,000	30,000	14.5	11.5	1,425	7540784	
CSCF4860N6D*+TXV	A*VC961005CNA*		38,000	30,000	14.5	11.5	1,300	7540980	
CSCF4860N6D*+TXV	G*EC961004CNA*		38,000	30,000	14.5	12.2	1,275	7541119	
CSCF4860N6D*+TXV	G*VC81005C*B*		38,000	30,000	14.5	11.5	1,370	7540854	
CSCF4860N6D*+TXV	G*VC961005CNA*		38,000	30,000	14.5	11.5	1,300	7540926	
CSCF4860N6D*+TXV	A*EC961205DNA*		38,000	30,000	14.5	12.2	1,400	7541166	
CSCF4860N6D*+TXV	A*VC81005C*B*		38,000	30,000	14.5	11.5	1,370	7540890	
CSCF4860N6D*+TXV	G*E81005C*B*		38,000	30,000	14.5	11.5	1,425	7540802	
CSCF4860N6D*+TXV	G*VM970804CNA*		38,000	30,000	14.5	11.5	1,425	7541018	

See Notes on Page 78.

AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0421K* (Contd.)	CSCF4860N6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	11.5	1,425	7540818
	CSCF4860N6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	11.5	1,385	7540962
ASX14 0431K*	ASPT47D14A*		38,000	30,000	14.5	12.2	1,250	8245649
	ASPT49D14A*		39,000	30,800	14.5	12.2	1,425	8245650
	ASPT59C14A*		38,000	30,000	14.0	12.2	1,260	8245647
	AVPTC48D14A*		38,000	30,000	15.0	12.5	1,310	8082852
	AVPTC49C14A*		36,200	28,600	14.0	12.2	1,300	10221077
	AVPTC49D14A*		38,000	30,000	15.0	12.5	1,320	8996368
	CA*F4961*6D*	A*VC80805D*B*	39,000	31,800	14.5	12.2	1,350	9947509
	CA*F4961*6D*	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082899
	CA*F4961*6D*	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8083048
	CA*F4961*6D*	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8082999
	CA*F4961*6D*	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8083008
	CA*F4961*6D*	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8082991
	CA*F4961*6D*	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8083060
	CA*F4961*6D*	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082940
	CA*F4961*6D*	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8082982
	CA*F4961*6D*	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082965
	CA*F4961*6D*	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8083069
	CA*F4961*6D*	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082974
	CA*F4961*6D*	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082948
	CA*F4961*6D*	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8083017
	CA*F4961*6D*	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082933
	CA*F4961*6D*	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8083026
	CA*F4961*6D*	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082907
	CA*F4961*6D*	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	8082882
	CA*F4961*6D*	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8083034
	CA*F4961*6D*	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082956
	CA*F4961*6D*	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082916
	CA*F4961*6D*	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	8082890
	CA*F4961*6D*	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082924
	CA*F4961*6D*	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	8082873
	CA*F4961*6D*+EEP		39,000	30,800	14.0	12.2	1,400	8082854
	CA*F4961*6D*+EEP+TXV		39,000	30,800	14.0	12.2	1,400	8082856
	CA*F4961*6D*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	8082858
	CA*F4961*6D*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	8082860
	CA*F4961*6D*+TXV	A*VC80805D*B*	39,000	31,800	14.5	12.2	1,350	9947510
	CA*F4961*6D*+TXV	A*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8083071
	CA*F4961*6D*+TXV	A*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082967
	CA*F4961*6D*+TXV	G*E80805D*A*	39,000	30,800	14.5	12.2	1,425	8082884
	CA*F4961*6D*+TXV	G*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8082993
	CA*F4961*6D*+TXV	A*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8083028
	CA*F4961*6D*+TXV	G*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082901
	CA*F4961*6D*+TXV	G*EC961205DNA*	39,000	30,800	14.5	12.2	1,400	8083050
CA*F4961*6D*+TXV	A*VC80805C*B*	39,000	30,800	14.5	12.2	1,400	8082918	
CA*F4961*6D*+TXV	A*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082959	
CA*F4961*6D*+TXV	A*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082927	
CA*F4961*6D*+TXV	A*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8083010	
CA*F4961*6D*+TXV	A*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8083061	
CA*F4961*6D*+TXV	G*VC960804CNA*	39,000	30,800	14.5	12.2	1,385	8082935	
CA*F4961*6D*+TXV	A*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082975	
CA*F4961*6D*+TXV	G*VC961005CNA*	39,000	30,800	14.5	12.2	1,300	8082942	
CA*F4961*6D*+TXV	G*E81005C*B*	39,000	30,800	14.5	12.2	1,425	8082892	
CA*F4961*6D*+TXV	G*E80805C*B*	39,000	30,800	14.5	12.2	1,425	8082875	
CA*F4961*6D*+TXV	G*VC81005C*B*	39,000	30,800	14.5	12.2	1,370	8082909	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0431K* (Contd.)	CA*F4961*6D*+TXV	G*EC961004CNA*	39,000	30,800	14.5	12.2	1,275	8083037
	CA*F4961*6D*+TXV	A*VM971005CNA*	39,000	30,800	14.5	12.2	1,300	8083019
	CA*F4961*6D*+TXV	G*VM971205DNA*	39,000	30,800	14.5	12.2	1,300	8083002
	CA*F4961*6D*+TXV	G*VM970804CNA*	39,000	30,800	14.5	12.2	1,430	8082984
	CA*F4961*6D*+TXV	G*VC961205DNA*	39,000	30,800	14.5	12.2	1,450	8082950
	CAPT4961*4A*+MBVC1600**-1A*		39,000	30,800	14.5	12.2	1,300	8082862
	CAPT4961*4A*+MBVC2000**-1A*		39,000	30,800	14.5	12.2	1,300	8082864
	CHPF4860D6D*	A*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9947511
	CHPF4860D6D*	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8083030
	CHPF4860D6D*	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082944
	CHPF4860D6D*	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082978
	CHPF4860D6D*	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	8082877
	CHPF4860D6D*	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	8082895
	CHPF4860D6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083039
	CHPF4860D6D*	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082929
	CHPF4860D6D*	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082937
	CHPF4860D6D*	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	8082886
	CHPF4860D6D*	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082912
	CHPF4860D6D*	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082920
	CHPF4860D6D*	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082903
	CHPF4860D6D*	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8082995
	CHPF4860D6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083072
	CHPF4860D6D*	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8083013
	CHPF4860D6D*	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8083021
	CHPF4860D6D*	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8082986
	CHPF4860D6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083063
	CHPF4860D6D*	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082952
	CHPF4860D6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083052
	CHPF4860D6D*	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082961
	CHPF4860D6D*	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082970
	CHPF4860D6D*	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8083004
	CHPF4860D6D*+EEP+TXV		38,000	30,000	14.0	12.2	1,425	8082866
	CHPF4860D6D*+MBVC1600**-1A*		38,000	30,000	14.5	12.2	1,400	8082869
	CHPF4860D6D*+MBVC2000**-1A*		38,000	30,000	14.5	12.2	1,400	8082871
	CHPF4860D6D*+TXV	A*VC80805D*B*	38,000	31,000	14.5	12.2	1,350	9947512
	CHPF4860D6D*+TXV	A*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082963
	CHPF4860D6D*+TXV	G*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8083006
	CHPF4860D6D*+TXV	G*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082905
	CHPF4860D6D*+TXV	G*VC960804CNA*	38,000	30,000	14.5	12.2	1,385	8082939
	CHPF4860D6D*+TXV	G*E80805C*B*	38,000	30,000	14.5	12.2	1,425	8082879
	CHPF4860D6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083041
	CHPF4860D6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083054
	CHPF4860D6D*+TXV	G*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8082988
	CHPF4860D6D*+TXV	G*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082946
	CHPF4860D6D*+TXV	G*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8082997
	CHPF4860D6D*+TXV	A*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082980
	CHPF4860D6D*+TXV	A*VM971005CNA*	38,000	30,000	14.5	12.2	1,300	8083023
	CHPF4860D6D*+TXV	A*VM971205DNA*	38,000	30,000	14.5	12.2	1,300	8083032
	CHPF4860D6D*+TXV	A*VM970804CNA*	38,000	30,000	14.5	12.2	1,425	8083015
	CHPF4860D6D*+TXV	A*VC80805C*B*	38,000	30,000	14.5	12.2	1,400	8082922
CHPF4860D6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083074	
CHPF4860D6D*+TXV	G*E80805D*A*	38,000	30,000	14.5	12.2	1,425	8082888	
CHPF4860D6D*+TXV	G*E81005C*B*	38,000	30,000	14.5	12.2	1,425	8082897	
CHPF4860D6D*+TXV	G*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082914	
CHPF4860D6D*+TXV	A*VC961005CNA*	38,000	30,000	14.5	12.2	1,300	8082972	
CHPF4860D6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083064	



AHRI RATINGS (CONT.)

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0431K* (Contd.)	CHPF4860D6D*+TXV	G*VC961205DNA*	38,000	30,000	14.5	12.2	1,425	8082954
	CHPF4860D6D*+TXV	A*VC81005C*B*	38,000	30,000	14.5	12.2	1,370	8082931
	CSCF4860N6D*	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083056
	CSCF4860N6D*	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083066
	CSCF4860N6D*	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083076
	CSCF4860N6D*	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083043
	CSCF4860N6D*+TXV	A*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083067
	CSCF4860N6D*+TXV	A*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083077
	CSCF4860N6D*+TXV	G*EC961205DNA*	38,000	30,000	14.5	12.2	1,400	8083058
	CSCF4860N6D*+TXV	G*EC961004CNA*	38,000	30,000	14.5	12.2	1,275	8083045
ASX14 0481K*	ARUF61D14A*		45,500	32,200	14.0	11.7	1,520	7989020
	ASPT49C14A*		45,000	31,800	14.0	12.0	1,395	10221036
	ASPT59C14A*		45,500	32,200	14.0	12.0	1,430	8245652
	ASPT61D14A*		47,000	33,200	14.5	12.2	1,630	8245654
	AVPTC48D14A*		46,000	32,600	14.5	11.7	1,550	7541172
	AVPTC49C14A*		45,000	31,800	14.0	11.7	1,420	10221078
	AVPTC59C14A*		45,500	32,200	14.0	12.0	1,485	8996369
	AVPTC60D14A*		46,000	32,600	14.5	11.7	1,590	7541173
	AVPTC61D14A*		46,500	32,800	14.5	12.2	1,455	8996370
	CA*F4860*6D*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541338
	CA*F4860*6D*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541352
	CA*F4860*6D*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541252
	CA*F4860*6D*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541326
	CA*F4860*6D*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541289
	CA*F4860*6D*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541264
	CA*F4860*6D*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541281
	CA*F4860*6D*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541365
	CA*F4860*6D*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7541239
	CA*F4860*6D*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541299
	CA*F4860*6D*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7541272
	CA*F4860*6D*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541313
	CA*F4860*6D*+EEP		45,500	32,200	14.0	11.7	1,550	7541175
	CA*F4860*6D*+EEP+TXV		45,500	32,200	14.0	11.7	1,550	7541177
	CA*F4860*6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7541179
	CA*F4860*6D*+TXV	A*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9947513
	CA*F4860*6D*+TXV	G*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7541378
	CA*F4860*6D*+TXV	G*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7541265
	CA*F4860*6D*+TXV	A*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7541387
	CA*F4860*6D*+TXV	A*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7541291
	CA*F4860*6D*+TXV	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7541212
	CA*F4860*6D*+TXV	G*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7541315
	CA*F4860*6D*+TXV	G*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7541241
	CA*F4860*6D*+TXV	G*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7541254
	CA*F4860*6D*+TXV	G*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7541382
	CA*F4860*6D*+TXV	A*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7541392
	CA*F4860*6D*+TXV	A*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7541274
	CA*F4860*6D*+TXV	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7541225
	CA*F4860*6D*+TXV	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7541199
	CA*F4860*6D*+TXV	G*E81005C*B*	45,500	32,200	14.5	11.7	1,570	7541205
	CA*F4860*6D*+TXV	A*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7541354
	CA*F4860*6D*+TXV	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7541232
CA*F4860*6D*+TXV	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7541218	
CA*F4860*6D*+TXV	A*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7541340	
CA*F4860*6D*+TXV	A*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7541367	
CA*F4860*6D*+TXV	G*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7541302	
CA*F4860*6D*+TXV	G*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7541328	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0481K* (Contd.)	CA*F4860*6D*+TXV	A*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7541282
	CA*F4961*6D*+EEP		46,000	32,600	14.0	11.7	1,550	7541180
	CA*F4961*6D*+EEP+TXV		46,000	32,600	14.0	11.7	1,550	7541182
	CA*F4961*6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7541183
	CAPT4961*4A*	A*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9947514
	CAPT4961*4A*	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7547538
	CAPT4961*4A*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7547543
	CAPT4961*4A*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7547544
	CAPT4961*4A*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7547550
	CAPT4961*4A*	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7547536
	CAPT4961*4A*	A*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7547556
	CAPT4961*4A*	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7547540
	CAPT4961*4A*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7547549
	CAPT4961*4A*	G*E81005C*B*	45,500	32,200	14.5	11.7	1,570	7547537
	CAPT4961*4A*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7547553
	CAPT4961*4A*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7547548
	CAPT4961*4A*	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7547541
	CAPT4961*4A*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7547547
	CAPT4961*4A*	G*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7547554
	CAPT4961*4A*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7547545
	CAPT4961*4A*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7547551
	CAPT4961*4A*	A*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7547557
	CAPT4961*4A*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7547542
	CAPT4961*4A*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7547552
	CAPT4961*4A*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7547546
	CAPT4961*4A*	G*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7547555
	CAPT4961*4A*	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7547539
	CAPT4961*4A*+EEP		46,000	32,600	14.0	11.7	1,550	7541185
	CAPT4961*4A*+MBVC2000**-1A*		45,000	31,800	14.5	11.7	1,595	7541187
	CHPF4860D6D*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541356
	CHPF4860D6D*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7541244
	CHPF4860D6D*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541267
	CHPF4860D6D*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541284
	CHPF4860D6D*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541369
	CHPF4860D6D*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541343
	CHPF4860D6D*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541330
	CHPF4860D6D*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541257
	CHPF4860D6D*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541292
	CHPF4860D6D*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541304
	CHPF4860D6D*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7541275
	CHPF4860D6D*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541318
	CHPF4860D6D*+EEP		46,000	32,600	14.0	11.7	1,550	7541189
	CHPF4860D6D*+EEP+TXV		46,000	32,600	14.0	11.7	1,550	7541191
	CHPF4860D6D*+MBVC2000**-1A*+TXV		46,000	32,600	14.5	12.0	1,600	7541193
	CHPF4860D6D*+TXV	A*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9947515
	CHPF4860D6D*+TXV	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7541235
	CHPF4860D6D*+TXV	A*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7541358
	CHPF4860D6D*+TXV	G*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7541268
	CHPF4860D6D*+TXV	A*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7541394
	CHPF4860D6D*+TXV	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7541201
CHPF4860D6D*+TXV	A*VC961205DNA*	45,500	32,200	14.5	12.0	1,450	7541294	
CHPF4860D6D*+TXV	G*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7541307	
CHPF4860D6D*+TXV	A*EH800805C*A*	45,000	31,800	14.5	11.7	1,480	8953012	
CHPF4860D6D*+TXV	A*VM970804CNA*	45,000	31,800	14.5	12.0	1,385	7541345	
CHPF4860D6D*+TXV	G*E81005C*B*	45,500	32,200	14.5	11.7	1,570	7541208	
CHPF4860D6D*+TXV	G*EC961205DNA*	45,000	31,800	14.5	12.0	1,525	7541385	

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0481K* (Contd.)	CHPF4860D6D*+TXV	A*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7541285
	CHPF4860D6D*+TXV	A*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7541277
	CHPF4860D6D*+TXV	G*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7541332
	CHPF4860D6D*+TXV	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7541227
	CHPF4860D6D*+TXV	A*EH801005C*A*	45,500	32,200	14.5	11.7	1,570	8953014
	CHPF4860D6D*+TXV	G*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7541246
	CHPF4860D6D*+TXV	A*VM971205DNA*	45,500	32,200	14.5	12.0	1,450	7541371
	CHPF4860D6D*+TXV	G*VM971005CNA*	45,500	32,200	14.5	12.0	1,450	7541320
	CHPF4860D6D*+TXV	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7541221
	CHPF4860D6D*+TXV	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7541214
	CHPF4860D6D*+TXV	G*VC961005CNA*	45,500	32,200	14.5	12.0	1,450	7541259
	CHPF4860D6D*+TXV	A*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7541390
	CHPF4860D6D*+TXV	G*EC961004CNA*	45,000	31,800	14.5	11.7	1,525	7541380
	CSCF4860N6D*	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541309
	CSCF4860N6D*	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541295
	CSCF4860N6D*	A*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7541278
	CSCF4860N6D*	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541374
	CSCF4860N6D*	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541262
	CSCF4860N6D*	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541361
	CSCF4860N6D*	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541287
	CSCF4860N6D*	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541334
	CSCF4860N6D*	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541269
	CSCF4860N6D*	G*VC960804CNA*	45,000	31,800	14.5	11.7	1,385	7541248
	CSCF4860N6D*	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541347
	CSCF4860N6D*	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541322
	CSCF4860N6D*+EEP		45,500	32,200	14.0	11.7	1,550	7541195
	CSCF4860N6D*+EEP+TXV		45,500	32,200	14.0	11.7	1,550	7541197
	CSCF4860N6D*+TXV	A*VC80805D*B*	45,500	35,000	14.5	11.7	1,500	9947516
	CSCF4860N6D*+TXV	A*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541297
	CSCF4860N6D*+TXV	G*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7541223
	CSCF4860N6D*+TXV	A*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7541230
	CSCF4860N6D*+TXV	A*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541376
	CSCF4860N6D*+TXV	G*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541324
	CSCF4860N6D*+TXV	A*VC81005C*B*	45,500	32,200	14.5	11.7	1,530	7541236
	CSCF4860N6D*+TXV	G*VC80805C*B*	45,500	32,200	14.5	11.7	1,510	7541216
	CSCF4860N6D*+TXV	A*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541288
	CSCF4860N6D*+TXV	G*VC961005CNA*	45,500	32,200	14.5	11.7	1,450	7541263
	CSCF4860N6D*+TXV	G*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7541250
	CSCF4860N6D*+TXV	G*E81005C*B*	45,000	31,800	14.5	11.7	1,570	7541210
	CSCF4860N6D*+TXV	A*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541349
CSCF4860N6D*+TXV	G*VM971205DNA*	45,500	32,200	14.5	11.7	1,450	7541336	
CSCF4860N6D*+TXV	G*E80805C*B*	45,000	31,800	14.5	11.7	1,480	7541203	
CSCF4860N6D*+TXV	G*VM970804CNA*	45,000	31,800	14.5	11.7	1,385	7541311	
CSCF4860N6D*+TXV	A*VM971005CNA*	45,500	32,200	14.5	11.7	1,450	7541363	
CSCF4860N6D*+TXV	A*VC960804CNA*	45,000	31,800	14.5	12.0	1,385	7541279	
CSCF4860N6D*+TXV	G*VC961205DNA*	45,500	32,200	14.5	11.7	1,450	7541271	
ASX14 0601K*	ASPT61D14A*		57,000	40,000	14.0	11.7	1,645	7989021
	AVPTC60D14A*		57,000	40,000	14.0	11.7	1,620	7541398
	AVPTC61D14A*		57,000	40,000	14.5	12.0	1,775	8996371
	CA*F4961*6D*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541541
	CA*F4961*6D*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541495
	CA*F4961*6D*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541518
	CA*F4961*6D*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541472
	CA*F4961*6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7541400
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7541402
	CA*F4961*6D*+TXV	A*VC80805D*B*	57,000	41,500	14.5	11.7	1,650	9947517

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0601K* (Contd.)	CA*F4961*6D*+TXV	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541464
	CA*F4961*6D*+TXV	G*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7541436
	CA*F4961*6D*+TXV	G*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7541474
	CA*F4961*6D*+TXV	G*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7541555
	CA*F4961*6D*+TXV	A*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7541543
	CA*F4961*6D*+TXV	A*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7541497
	CA*F4961*6D*+TXV	A*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7541457
	CA*F4961*6D*+TXV	A*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7541563
	CA*F4961*6D*+TXV	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541486
	CA*F4961*6D*+TXV	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541510
	CA*F4961*6D*+TXV	G*E81005C*B*	57,000	40,000	14.5	11.7	1,600	7541429
	CA*F4961*6D*+TXV	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541532
	CA*F4961*6D*+TXV	A*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7541450
	CA*F4961*6D*+TXV	G*E80805C*B*	57,000	40,000	14.5	11.7	1,525	7541414
	CA*F4961*6D*+TXV	G*E80805D*A*	57,000	40,000	14.5	12.0	1,500	7541422
	CA*F4961*6D*+TXV	G*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7541520
	CA*F4961*6D*+TXV	G*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7541443
	CAPT4961*4A*	A*VC80805D*B*	57,000	41,500	14.0	11.7	1,650	9947518
	CAPT4961*4A*	G*VC80805C*B*	57,000	40,000	14.0	11.7	1,560	7547561
	CAPT4961*4A*	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541488
	CAPT4961*4A*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541499
	CAPT4961*4A*	A*VC81005C*B*	57,000	40,000	14.0	11.7	1,525	7547564
	CAPT4961*4A*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541545
	CAPT4961*4A*	G*E81005C*B*	57,000	40,000	14.0	11.7	1,600	7547560
	CAPT4961*4A*	G*E80805D*A*	57,000	40,000	14.0	12.0	1,500	7547559
	CAPT4961*4A*	A*EC961205DNA*	56,500	40,000	14.0	11.7	1,525	7541566
	CAPT4961*4A*	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541466
	CAPT4961*4A*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541476
	CAPT4961*4A*	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541534
	CAPT4961*4A*	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541512
	CAPT4961*4A*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541522
	CAPT4961*4A*	G*VC81005C*B*	57,000	40,000	14.0	11.7	1,525	7547562
	CAPT4961*4A*	G*E80805C*B*	57,000	40,000	14.0	11.7	1,525	7547558
	CAPT4961*4A*	G*EC961205DNA*	56,500	40,000	14.0	11.7	1,525	7541557
	CAPT4961*4A*	A*VC80805C*B*	57,000	40,000	14.0	11.7	1,560	7547563
	CAPT4961*4A*+EEP		57,000	40,000	14.0	11.7	1,545	7541404
	CHPF4860D6D*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541478
	CHPF4860D6D*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541524
	CHPF4860D6D*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541547
	CHPF4860D6D*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541501
	CHPF4860D6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7541406
	CHPF4860D6D*+MBVC2000*-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7541408
	CHPF4860D6D*+TXV	A*VC80805D*B*	57,000	41,500	14.5	11.7	1,650	9947519
	CHPF4860D6D*+TXV	A*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7541503
	CHPF4860D6D*+TXV	G*E81005C*B*	57,000	40,000	14.5	11.7	1,600	7541432
	CHPF4860D6D*+TXV	G*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7541439
	CHPF4860D6D*+TXV	A*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7541453
	CHPF4860D6D*+TXV	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541537
	CHPF4860D6D*+TXV	G*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7541559
	CHPF4860D6D*+TXV	G*E80805D*A*	57,000	40,000	14.5	12.0	1,500	7541424
CHPF4860D6D*+TXV	A*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7541568	
CHPF4860D6D*+TXV	A*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7541549	
CHPF4860D6D*+TXV	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541468	
CHPF4860D6D*+TXV	A*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7541459	
CHPF4860D6D*+TXV	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541490	
CHPF4860D6D*+TXV	G*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7541446	

See Notes on Page 78.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL <sup>1</sup>	SENS. <sup>1</sup>	SEER <sup>2</sup>	EER <sup>3</sup>		
ASX14 0601K* (Contd.)	CHPF4860D6D*+TXV	G*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7541480
	CHPF4860D6D*+TXV	A*EH801005C*A*	57,000	40,000	14.5	11.7	1,600	8953018
	CHPF4860D6D*+TXV	G*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7541526
	CHPF4860D6D*+TXV	G*E80805C*B*	57,000	40,000	14.5	11.7	1,525	7541417
	CHPF4860D6D*+TXV	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541514
	CHPF4860D6D*+TXV	A*EH800805C*A*	57,000	40,000	14.5	11.7	1,525	8953016
	CSCF4860N6D*	A*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541551
	CSCF4860N6D*	G*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541482
	CSCF4860N6D*	G*VM971205DNA*	56,500	40,000	14.0	11.7	1,575	7541528
	CSCF4860N6D*	A*VC961205DNA*	56,500	40,000	14.0	11.7	1,575	7541506
	CSCF4860N6D*+EEP+TXV		57,000	40,000	14.0	11.7	1,545	7541410
	CSCF4860N6D*+MBVC2000**-1A*+TXV		57,000	40,000	14.5	12.0	1,620	7541412
	CSCF4860N6D*+TXV	A*VC80805D*B*	57,000	41,500	14.5	11.7	1,650	9947520
	CSCF4860N6D*+TXV	G*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7541441
	CSCF4860N6D*+TXV	G*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7541448
	CSCF4860N6D*+TXV	G*E81005C*B*	57,000	40,000	14.5	11.7	1,600	7541434
	CSCF4860N6D*+TXV	G*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541516
	CSCF4860N6D*+TXV	G*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7541484
	CSCF4860N6D*+TXV	A*VC81005C*B*	57,000	40,000	14.5	11.7	1,525	7541462
	CSCF4860N6D*+TXV	A*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541492
	CSCF4860N6D*+TXV	A*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7541570
	CSCF4860N6D*+TXV	G*E80805C*B*	57,000	40,000	14.5	11.7	1,525	7541420
	CSCF4860N6D*+TXV	A*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7541553
	CSCF4860N6D*+TXV	G*VM971205DNA*	57,000	40,000	14.5	12.0	1,575	7541530
	CSCF4860N6D*+TXV	G*VC961005CNA*	57,000	40,000	14.0	11.7	1,525	7541470
	CSCF4860N6D*+TXV	G*EC961205DNA*	57,000	40,000	14.0	11.7	1,525	7541561
	CSCF4860N6D*+TXV	G*E80805D*A*	57,000	40,000	14.5	12.0	1,500	7541426
	CSCF4860N6D*+TXV	A*VM971005CNA*	57,000	40,000	14.0	11.7	1,525	7541539
	CSCF4860N6D*+TXV	A*VC961205DNA*	57,000	40,000	14.5	12.0	1,575	7541508
	CSCF4860N6D*+TXV	A*VC80805C*B*	57,000	40,000	14.5	11.7	1,560	7541455


<sup>1</sup> BTU/h

<sup>2</sup> Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F

<sup>3</sup> Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F

**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP- Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Nexgen brand Gas Furnace contains the EEP cooling time delay.
- HSK- Hard Start Kit: This is an additional capacitor to assist with compressor start-up, used with the standard "run" capacitor that is supplied in the unit. Order from an Amana® brand distributor or service department.

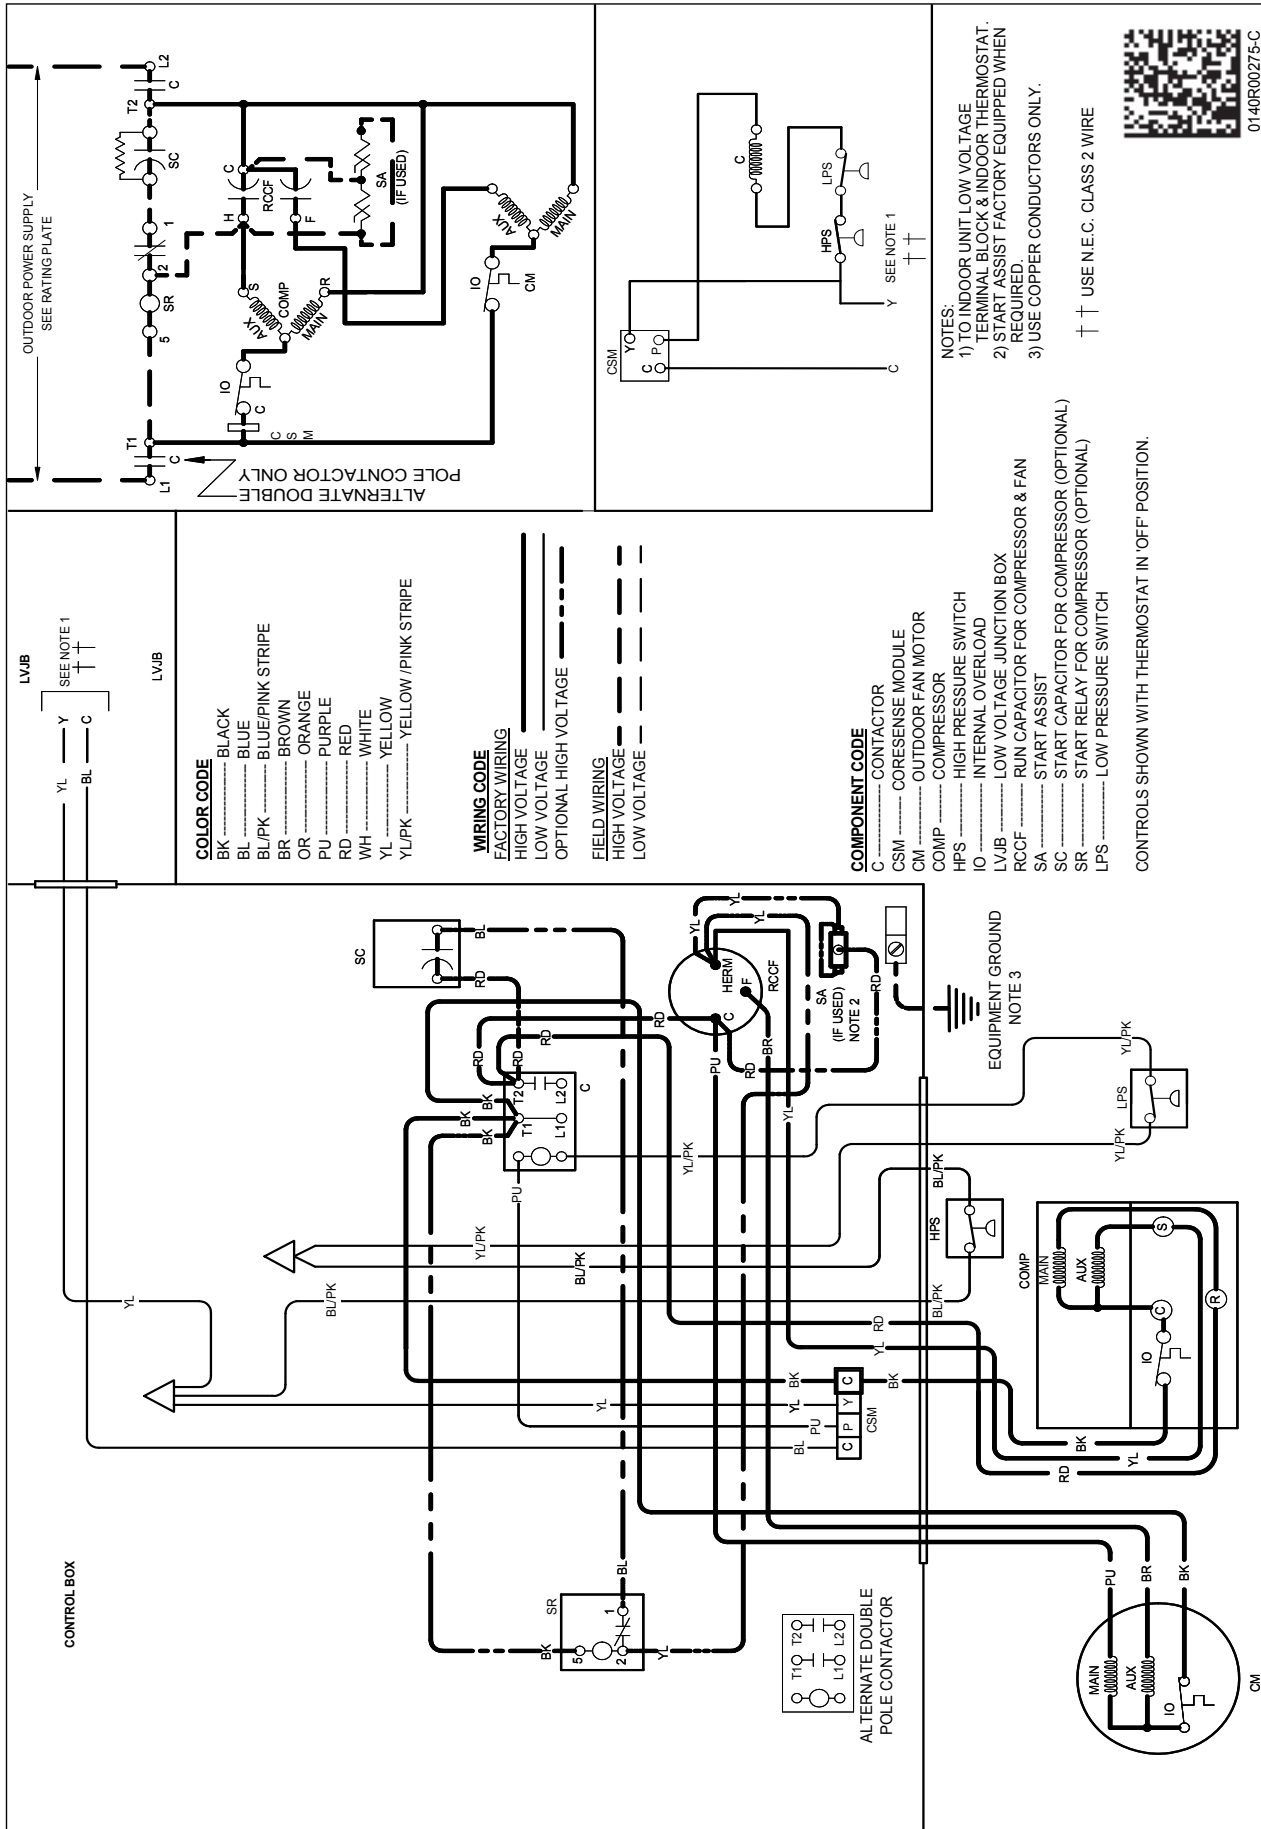

**WARNING**

**High Voltage:** Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.

MODEL	DIMENSIONS		
	W"	D"	H"
ASX140181/191**	26	26	27½
ASX140241*/251*	26	26	32½
ASX140301**	29	29	32½
ASX140311**	29	29	32½
ASX140361/371**	29	29	32½
ASX140421**	29	29	36¼
ASX140431**	29	29	36¼
ASX140481**	35½	35½	36¼
ASX140601**	35½	35½	38¼

ACCESSORIES

Model #	Description	ASX14 018/19	ASX14 024/25	ASX14 030/31	ASX14 036/37	ASX14 042/43	ASX14 048	ASX14 060
ABK-20	Anchor Bracket Kit <sup>◊</sup>			X	X	X	X	X
ABK-21	Anchor Bracket Kit <sup>◊</sup>	X	X					
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X			
CSR-U-2	Hard-start Kit					X	X	X
CSR-U-3	Hard-start Kit						X	X
FSK01A <sup>1</sup>	Freeze Protection Kit	X	X	X	X	X	X	X
LSK02A <sup>2</sup>	Liquid Line Solenoid Kit	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X
TX2N4 <sup>2</sup>	TXV Kit	X						
TX2N4A <sup>2</sup>	TXV Kit	X	X					
TX3N4 <sup>2</sup>	TXV Kit			X	X			
TX5N4 <sup>2</sup>	TXV Kit					X	X	X

<sup>◊</sup> Contains 20 brackets; four brackets needed to anchor unit to pad

<sup>1</sup> Installed on indoor coil

<sup>2</sup> Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with rotary compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit. The TXV should always be sized based on the tonnage of the outdoor unit.